SAMSUNG

LCD-TV

Chassis : GCR26SE*
GCR32SE*
GCR37SE*
GCR40SE*

Model : LE26A45*C**
LE32A45*C**
LE37A45*C**
LE40A45*C**

SERVICE Manual

TFT-LCD TV



LE26A45*C**/LE32A45*C**/LE37A45*C**/LE40A45*C**

Contents

1. Precautions
2. Product specifications
3. Disassembly and Reassembly
4. Troubleshooting
5. Exploded View & Part List
6. Wiring Diagram
7. Schematic Diagram

Refer to the service manual in the GSPN (see the rear cover) for the more information.

Contents

1. Precautions 1-1

1-1. Safety Precautions 1-1
1-2. Servicing Precautions 1-2
1-3. Electrostatically Sensitive Devices (ESD) Precautions 1-2
1-4. Installation Precautions 1-3

2. Product specifications 2-1

2-1. Feature & Specifications 2-1
2-3. Spec Comparison to the Old Models 2-7
2-4. Accessories 2-8

3. Disassembly and Reassemble 3-1

3-1. Disassembly 3-1

4. Troubleshooting 4-1

4-1. Troubleshooting 4-1
4-2. Alignments and Adjustments 4-13
4-3. Factory Mode Adjustments 4-14
4-4. White Balance - Calibration 4-21
4-5. White Ratio (Balance) Adjustment 4-23
4-6. HOW TO UPGRADE 4-24

5. Exploded View & Part List 5-1

5-1. LE26A45*C** Exploded View 5-1
5-2. LE32A45*C** Exploded View 5-3
5-3. LE37A45*C** Exploded View 5-5
5-4. LE40A45*C** Exploded View 5-7
5-5. LE26A45*C** Parts List 5-9
5-6. LE32A45*C** Parts List 5-41
5-7. LE37A45*C** Parts List 5-73
5-8. LE40A45*C** Parts List 5-106

6. Wiring Diagram 6-1

6-1. Wiring Diagram 6-1
6-2. Wiring Picture 6-4
6-2-3. LE26/32/37A451C* 6-5
6-3. Connector Functions 6-6
6-4. Cables 6-7

7. Schematic Diagram 7-1

7-1. Block Diagram 7-1
7-3. Schematic Diagrams for iDTV 7-2
7-4. Schematic Diagrams for Ready 7-9



GSPN (Global Service Partner Network)

Area	Web Site
North America	http://service.samsungportal.com
Latin America	http://latin.samsungportal.com
CIS	http://cis.samsungportal.com
Europe	http://europe.samsungportal.com
China	http://china.samsungportal.com
Asia	http://asia.samsungportal.com
Mideast & Africa	http://mea.samsungportal.com

This Service Manual is a property of Samsung Electronics Co.,Ltd.
Any unauthorized use of Manual can be punished under applicable International and/or domestic law.

© 2008 Samsung Electronics Co.,Ltd.
All rights reserved.
Printed in Korea
P/N: BN82-00340A-00



GSPN (Global Service Partner Network)

Area	Web Site
North America	http://service.samsungportal.com
Latin America	http://latin.samsungportal.com
CIS	http://cis.samsungportal.com
Europe	http://europe.samsungportal.com
China	http://china.samsungportal.com
Asia	http://asia.samsungportal.com
Mideast & Africa	http://mea.samsungportal.com

This Service Manual is a property of Samsung Electronics Co.,Ltd.
Any unauthorized use of Manual can be punished under applicable International and/or domestic law.

© 2008 Samsung Electronics Co.,Ltd.
All rights reserved.
Printed in Korea
P/N: BN82-00340A-00

1. Precautions

1-1. Safety Precautions

Follow these safety, servicing and ESD precautions to prevent damage and to protect against potential hazards such as electrical shock.

1-1-1. Warnings

1. For continued safety, do not attempt to modify the circuit board.
2. Disconnect the AC power and DC power jack before servicing.

1-1-2. Servicing the LCD TV

1. When servicing the LCD TV, Disconnect the AC line cord from the AC outlet.
2. It is essential that service technicians have an accurate voltage meter available at all times.
   Check the calibration of this meter periodically.

1-1-3. Fire and Shock Hazard

Before returning the LCD TV to the user, perform the following safety checks:

1. Inspect each lead dress to make certain that the leads are not pinched or that hardware is not lodged between the chassis and other metal parts in the LCD TV.
2. Inspect all protective devices such as nonmetallic control knobs, insulating materials, cabinet backs, adjustment and compartment covers or shields, isolation resistorcapacitor networks, mechanical insulators, etc.
3. Leakage Current Hot Check (Figure 1-1):
   WARNING : Do not use an isolation transformer during this test.
   Use a leakage current tester or a metering system that complies with American National Standards Institute (ANSI C101.1, Leakage Current for Appliances), and Underwriters Laboratories (UL Publication UL1410, 59.7).

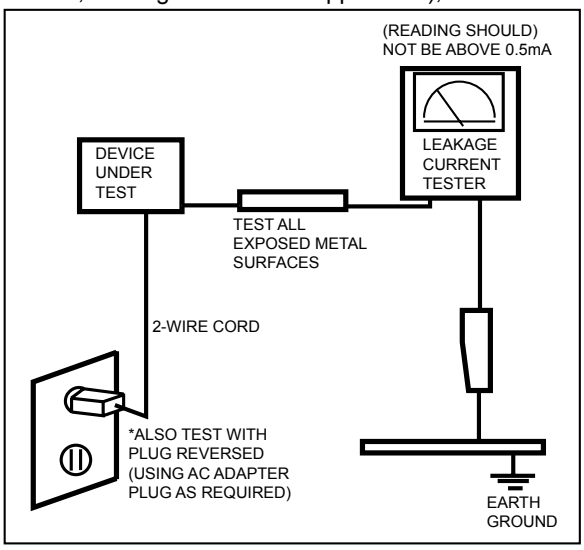


Figure 1-1. Leakage Current Test Circuit

4. With the unit completely reassembled, plug the AC line cord directly into a 120V AC outlet. With the unit's AC switch first in the ON position and then OFF, measure the current between a known earth ground (metal water pipe, conduit, etc.) and all exposed metal parts, including: metal cabinets, screwheads and control shafts.
   The current measured should not exceed 0.5 milliamp.
   Reverse the power-plug prongs in the AC outlet and repeat the test.

1-1-4. Product Safety Notices

Some electrical and mechanical parts have special safetyrelated characteristics which are often not evident from visual inspection. The protection they give may not be obtained by replacing them with components rated for higher voltage, wattage, etc. Parts that have special safety characteristics are identified by ⚠ on schematics and parts lists. A substitute replacement that does not have the same safety characteristics as the recommended replacement part might create shock, fire and/or other hazards. Product safety is under review continuously and new instructions are issued whenever appropriate.

1-2. Servicing Precautions

WARNING: An electrolytic capacitor installed with the wrong polarity might explode.
Caution: Before servicing units covered by this service manual, read and follow the Safety Precautions section of this manual.
Note: If unforeseen circumstances create conflict between the following servicing precautions and any of the safety precautions, always follow the safety precautions.

1-2-1 General Servicing Precautions

1. Always unplug the unit's AC power cord from the AC power source and disconnect the DC Power Jack before attempting to:
   (a) remove or reinstall any component or assembly, (b) disconnect PCB plugs or connectors, (c) connect a test component in parallel with an electrolytic capacitor.
2. Some components are raised above the printed circuit board for safety. An insulation tube or tape is sometimes used. The internal wiring is sometimes clamped to prevent contact with thermally hot components. Reinstall all such elements to their original position.
3. After servicing, always check that the screws, components and wiring have been correctly reinstalled. Make sure that the area around the serviced part has not been damaged.
4. Check the insulation between the blades of the AC plug and accessible conductive parts (examples: metal panels, input terminals and earphone jacks).
5. Insulation Checking Procedure: Disconnect the power cord from the AC source and turn the power switch ON. Connect an insulation resistance meter (500 V) to theblades of the AC plug.
   The insulation resistance between each blade of the AC plug and accessible conductive parts (see above) should be greater than 1 megohm.
6. Always connect a test instrument's ground lead to the instrument chassis ground before connecting the positive lead; always remove the instrument's ground lead last.

1-3. Electrostatically Sensitive Devices (ESD) Precautions

Some semiconductor (solid state) devices can be easily damaged by static electricity. Such components are commonly called Electrostatically Sensitive Devices (ESD). Examples of typical ESD are integrated circuits and some field-effect transistors. The following techniques will reduce the incidence of component damage caused by static electricity.

1. Immediately before handling any semiconductor components or assemblies, drain the electrostatic charge from your body by touching a known earth ground. Alternatively, wear a discharging wrist-strap device. To avoid a shock hazard, be sure to remove the wrist strap before applying power to the LCD TV.
2. After removing an ESD-equipped assembly, place it on a conductive surface such as aluminum foil to prevent accumulation of an electrostatic charge.
3. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ESDs.
4. Use only a grounded-tip soldering iron to solder or desolder ESDs.
5. Use only an anti-static solder removal device. Some solder removal devices not classified as "anti-static" can generate electrical charges sufficient to damage ESDs.
6. Do not remove a replacement ESD from its protective package until you are ready to install it. Most replacement ESDs are packaged with leads that are electrically shorted together by conductive foam, aluminum foil or other conductive materials.
7. Immediately before removing the protective material from the leads of a replacement ESD, touch the protective material to the chassis or circuit assembly into which the device will be installed.
   Caution: Be sure no power is applied to the chassis or circuit and observe all other safety precautions.
8. Minimize body motions when handling unpackaged replacement ESDs. Motions such as brushing clothes together, or lifting your foot from a carpeted floor can generate enough static electricity to damage an ESD.

1-4. Installation Precautions

1. For safety reasons, more than two people are required for carrying the product.
2. Keep the power cord away from any heat emitting devices, as a melted covering may cause fire or electric shock.
3. Do not place the product in areas with poor ventilation such as a bookshelf or closet. The increased internal temperature may cause fire.
4. Bend the external antenna cable when connecting it to the product. This is a measure to protect it from being exposed to moisture. Otherwise, it may cause a fire or electric shock.
5. Make sure to turn the power off and unplug the power cord from the outlet before repositioning the product. Also check the antenna cable or the external connectors if they are fully unplugged. Damage to the cord may cause fire or electric shock.
6. Keep the antenna far away from any high-voltage cables and install it firmly. Contact with the highvoltage cable or the antenna falling over may cause fire or electric shock.
7. When installing the product, leave enough space (10cm) between the product and the wall for ventilation purposes. A rise in temperature within the product may cause fire.

Memo

2. Product specifications

2-1. Feature & Specifications

Model	LE26A45*C**

Feature

- Digital TV(LE26A457C**), RF, 3-HDMI, 1-Component, 1-AV, 1-S-Video, D-SUB
- Brightness : 500cd/m^2
- Contrast Ratio : 2000:1
- Response time : 8ms
- Dynamic contrast, BN07-00510A AMVA, BN07-00528A PVA)

Specifications

Item	Description	
LCD Panel	TFT-LCD panel, RGB vertical stripe, SPVA mode, normaly black, 26-Inch viewable, 0.4215(H) x 0.4215(W) x 3 mm pixel pitch	
Scanning Frequency	Horizontal : 30 kHz ~ 80 kHz (Automatic) Vertical : 56 Hz ~ 75 Hz (Automatic)	
Display Colors	16.7 million colors	
Maximum resolution	Horizontal : 1366 Pixels Vertical : 768 Pixels	
Input Signal	Analog 0.7 Vp-p ± 5% positive at 75Ω , internally terminated	
Input Sync Signal	H/V Separate, TTL, P. or N.	
Maximum Pixel Clock rate	80MHz	
Active Display Horizontal/Vertical	575.77(H) x 323.712(V) mm	
AC power voltage & Frequency	AC 110V ~ 240V, 50/60Hz	
Power Consumption	<120 W (< 1W, stand by)	
Dimensions Set (W x D x H)	26.37 x 8.50 x 19.7 inches (669.7 x 216 x 500.4 mm) with stand 26.37 x 2.96 x 17.74 inches (669.7 x 75.1 x 450.7mm) without stand	
Weight (Set)	21.38lbs (9.7Kg)	
TV System	Tuning	Frequency Synthesize (Refer to detailed Frequency Table)
	System	DVB-T, PAL, SECAM, NT4.43
	Sound	BG, DK, NICAM, MPEG1
Environmental Considerations	Operating Temperature : 50˚F ~ 104˚F (10˚C ~ 40˚C) Operating Humidity : 10% ~ 80%, non-condensing Storage temperature : -13˚F ~ 113˚F (-25˚C ~ 45˚C) Storage Humidity : 5% ~ 95%, non-condensing	
Environmental Considerations	- MAX Internal speaker Out : Right => 5W, Left => 5W - BASS Control Range : -8 dB ~ + 8dB - TREBLE Control Range : -8 dB ~ +8 dB - Headphone Out : 10 mW MAX - Output Frequency : RF : 80 Hz ~ 15 kHz A/V : 80 Hz ~ 20 kHz	
Note: Anynet+		

Model	LE32A45*C**

Feature

- Digital TV(LE32A457C**), RF, 3-HDMI, 1-Component, 1-AV, 1-S-Video, D-SUB
- Brightness : BN07-00511A(AUO)=450cd/m^2, BN07-00521A/538A(AMLCD)=500cd/m^2
- Contrast Ratio : BN07-00511A(AUO)=2000:1, BN07-00521A/538A(AMLCD)=3000:1
- Response time : BN07-00511A(AUO)=6.5ms, BN07-00521A/538A(AMLCD)=8ms
- Dynamic contrast

Specifications

Item	Description	
LCD Panel	TFT-LCD panel, RGB vertical stripe, normaly black, 32-Inch viewable, 0.51075(H) x 0.51075(W) x 3 mm pixel pitch	
Scanning Frequency	Horizontal : 30 kHz ~ 80 kHz (Automatic) Vertical : 56 Hz ~ 75 Hz (Automatic)	
Display Colors	16.7 million colors	
Maximum resolution	Horizontal : 1366 Pixels Vertical : 768 Pixels	
Input Signal	Analog 0.7 Vp-p ± 5% positive at 75Ω , internally terminated	
Input Sync Signal	H/V Separate, TTL, P. or N.	
Maximum Pixel Clock rate	80MHz	
Active Display Horizontal/Vertical	27.47 x 15.44 inches (697.68(H) x 392.26(V)mm)	
AC power voltage & Frequency	AC 110V ~ 240V, 50/60 Hz	
Power Consumption	<180 W (< 1W, stand by)	
Dimensions Set (W x D x H)	31.48 x 9.92 x 22.7 inches (799.6 x 252 x 576.6mm) with stand 31.48 x 3.11 x 20.67 inches (799.6 x 79 x 525.2 mm) without stand	
Weight (Set)	28.87 lbs (13.1Kg)	
TV System	Tuning	Frequency Synthesize (Refer to detailed Frequency Table)
	System	DVB-T, PAL, SECAM, NT4.43
	Sound	BG, DK, NICAM, MPEG1
Environmental Considerations	Operating Temperature : 50˚F ~ 104˚F (10˚C ~ 40˚C) Operating Humidity : 10% ~ 80%, non-condensing Storage temperature : -13˚F ~ 113˚F (-25˚C ~ 45˚C) Storage Humidity : 5% ~ 95%, non-condensing	
Environmental Considerations	- MAX Internal speaker Out : Right => 10W, Left => 10W - BASS Control Range : -8 dB ~ + 8dB - TREBLE Control Range : -8 dB ~ +8 dB - Headphone Out : 10 mW MAX - Output Frequency : RF : 80 Hz ~ 15 kHz A/V : 80 Hz ~ 20 kHz	
Note: Anynet+		

Model	LE37A45*C**
Feature	
▶ Digital TV(LE37A457C**), RF, 3-HDMI, 1-Component, 1-AV, 1-S-Video, D-SUB ▶ Brightness : 450cd/m^2 ▶ Contrast Ratio : 2500:1 ▶ Response time : 8ms ▶ Dynamic contrast	

Specifications		
Item	**Description**	
LCD Panel	TFT-LCD panel, RGB vertical stripe, normaly black, 37-Inch viewable, 0.6(H) x 0.6(W) x 3 mm pixel pitch	
Scanning Frequency	Horizontal : 30 kHz ~ 80 kHz (Automatic) Vertical : 56 Hz ~ 75 Hz (Automatic)	
Display Colors	16.7 million colors	
Maximum resolution	Horizontal : 1366 Pixels Vertical : 768 Pixels	
Input Signal	Analog 0.7 Vp-p ± 5% positive at 75Ω , internally terminated	
Input Sync Signal	H/V Separate, TTL, P. or N.	
Maximum Pixel Clock rate	80MHz	
Active Display Horizontal/Vertical	32.27 x 18.14 inches (819.6(H) x 460.8(V)mm)	
AC power voltage & Frequency	AC 110V ~ 240V, 50/60Hz	
Power Consumption	<190 W (< 1W, stand by)	
Dimensions Set (W x D x H)	36.08 x 11.81 x 25.91 inches(916.4 x 300 x 658.1mm) 36.08 x 3.22 x 23.66 inches (916.4 x 81.7 x 601.0 mm)	
Weight (Set)	40.33 lbs (18.3Kg)	
TV System	Tuning	Frequency Synthesize (Refer to detailed Frequency Table)
	System	DVB-T, PAL, SECAM, NT4.43
	Sound	BG, DK, NICAM, MPEG1
Environmental Considerations	Operating Temperature : 50˚F ~ 104˚F (10˚C ~ 40˚C) Operating Humidity : 10% ~ 80%, non-condensing Storage temperature : -13˚F ~ 113˚F (-25˚C ~ 45˚C) Storage Humidity : 5% ~ 95%, non-condensing	
Environmental Considerations	- MAX Internal speaker Out : Right => 10W, Left => 10W - BASS Control Range : -8 dB ~ + 8dB - TREBLE Control Range : -8 dB ~ +8 dB - Headphone Out : 10 mW MAX - Output Frequency : RF : 80 Hz ~ 15 kHz A/V : 80 Hz ~ 20 kHz	
Note: Anynet+		

Model	LE40A45*C**
Feature	
▶ Digital TV(LE40A457C**), RF, 3-HDMI, 1-Component, 1-AV, 1-S-Video, D-SUB ▶ Brightness : 450cd/m^2 ▶ Contrast Ratio : BN07-00515A(AUO)=2000:1, BN07-00523A(AMLCD)=3000:1 ▶ Response time : 8ms ▶ Dynamic contrast	

Specifications		
Item	**Description**	
LCD Panel	TFT-LCD panel, RGB vertical stripe, normaly black, 40-Inch viewable, 0.648(H) x 0.648(W) x 3 mm pixel pitch	
Scanning Frequency	Horizontal : 30 kHz ~ 80 kHz (Automatic) Vertical : 56 Hz ~ 75 Hz (Automatic)	
Display Colors	16.7 million colors	
Maximum resolution	Horizontal : 1366 Pixels Vertical : 768 Pixels	
Input Signal	Analog 0.7 Vp-p ± 5% positive at 75Ω , internally terminated	
Input Sync Signal	H/V Separate, TTL, P. or N.	
Maximum Pixel Clock rate	307MHz	
Active Display Horizontal/Vertical	34.85 x 19.60 (885.2 (H) x 497.7 (V) mm)	
AC power voltage & Frequency	AC 110V ~ 240V, 50/60Hz	
Power Consumption	<200 W (< 1W, stand by)	
Dimensions Set (W x D x H)	38.97 x 11.81 x 27.33 inches (989.8 x 300 x 694.3 mm)_with stand 38.97 x 3.22 x 25.22 inches (989.8 X 81.7 X 640.7 mm)_without stand	
Weight (Set)	45.41lbs (20.6Kg)	
TV System	Tuning	Frequency Synthesize (Refer to detailed Frequency Table)
	System	DVB-T, PAL, SECAM, NT4.43
	Sound	BG, DK, NICAM, MPEG1
Environmental Considerations	Operating Temperature : 50˚F ~ 104˚F (10˚C ~ 40˚C) Operating Humidity : 10% ~ 80%, non-condensing Storage temperature : -13˚F ~ 113˚F (-25˚C ~ 45˚C) Storage Humidity : 5% ~ 95%, non-condensing	
Environmental Considerations	- MAX Internal speaker Out : Right => 10W, Left => 10W - BASS Control Range : -8 dB ~ + 8dB - TREBLE Control Range : -8 dB ~ +8 dB - Headphone Out : 10 mW MAX - Output Frequency : RF : 80 Hz ~ 15 kHz A/V : 80 Hz ~ 20 kHz	
Note: Anynet+		

CHANNEL FREQUENCY TABLE

1. OUTPUT FREQUENCY : ANALOG fv:45.75MHz, fs:41.25MHz DIGITAL Fc:44MHz
2. TUNING STEP SIZE : FIRST PLL 250KHz SECOND PLL 62.5KHz







OSD	CH NO	AIR		BAND	CH NO		BAND	CH NO		CH NO	
		Air-DTV	Air-NTSC			Cable STD			Cable HRC		Cable IRC
1	1							A-8	72.00	A-8	73.25
2	2	57	55.25	V-L	2	55.25	V-L	2	54.00	2	55.25
3	3	63	61.25	V-L	3	61.25	V-L	3	60.00	3	61.25
4	4	69	67.25	V-L	4	67.25	V-L	4	66.00	4	67.25
5	5	79	77.25	V-L	5	77.25	V-L	A-7	78.00	A-7	79.25
6	6	85	83.25	V-L	6	83.25	V-L	A-6	84.00	A-6	85.25
7	7	177	175.25	V-H	7	175.25	V-H	7	174.00	7	175.25
8	8	183	181.25	V-H	8	181.25	V-H	8	180.00	8	181.25
9	9	189	187.25	V-H	9	187.25	V-H	9	186.00	9	187.25
10	10	195	193.25	V-H	10	193.25	V-H	10	192.00	10	193.25
11	11	201	199.25	V-H	11	199.25	V-H	11	198.00	11	199.25
12	12	207	205.25	V-H	12	205.25	V-H	12	204.00	12	205.25
13	13	213	211.25	V-H	13	211.25	V-H	13	210.00	13	211.25
14	14	473	471.25	UHF	A	121.25	MID	A	120.00	A	121.25
15	15	479	477.25	UHF	B	127.25	MID	B	126.00	B	127.25
16	16	485	483.25	UHF	C	133.25	MID	C	132.00	C	133.25
17	17	491	489.25	UHF	D	139.25	MID	D	138.00	D	139.25
18	18	497	495.25	UHF	E	145.25	MID	E	144.00	E	145.25
19	19	503	501.25	UHF	F	151.25	MID	F	150.00	F	151.25
20	20	509	507.25	UHF	G	157.25	MID	G	156.00	G	157.25
21	21	515	513.25	UHF	H	163.25	MID	H	162.00	H	163.25
22	22	521	519.25	UHF	I	169.25	MID	I	168.00	I	169.25
23	23	527	525.25	UHF	J	217.25	SUPER	J	216.00	J	217.25
24	24	533	531.25	UHF	K	223.25	SUPER	K	222.00	K	223.25
25	25	539	537.25	UHF	L	229.25	SUPER	L	228.00	L	229.25
26	26	545	543.25	UHF	M	235.25	SUPER	M	234.00	M	235.25
27	27	551	549.25	UHF	N	241.25	SUPER	N	240.00	N	241.25
28	28	557	555.25	UHF	O	247.25	SUPER	O	246.00	O	247.25
29	29	563	561.25	UHF	P	253.25	SUPER	P	252.00	P	253.25
30	30	569	567.25	UHF	Q	259.25	SUPER	Q	258.00	Q	259.25
31	31	575	573.25	UHF	R	265.25	SUPER	R	264.00	R	265.25
32	32	581	579.25	UHF	S	271.25	SUPER	S	270.00	S	271.25
33	33	587	585.25	UHF	T	277.25	SUPER	T	276.00	T	277.25
34	34	593	591.25	UHF	U	283.25	SUPER	U	282.00	U	283.25
35	35	599	597.25	UHF	V	289.25	SUPER	V	288.00	V	289.25
36	36	605	603.25	UHF	W	295.25	SUPER	W	294.00	W	295.25
37	37	611	609.25	UHF	AA	301.25	HYPER	AA	300.00	AA	301.25
38	38	617	615.25	UHF	BB	307.25	HYPER	BB	306.00	BB	307.25
39	39	623	621.25	UHF	CC	313.25	HYPER	CC	312.00	CC	313.25
40	40	629	627.25	UHF	DD	319.25	HYPER	DD	318.00	DD	319.25
41	41	635	633.25	UHF	EE	325.25	HYPER	EE	324.00	EE	325.25
42	42	641	639.25	UHF	FF	331.25	HYPER	FF	330.00	FF	331.25
43	43	647	645.25	UHF	GG	337.25	HYPER	GG	336.00	GG	337.25
44	44	653	651.25	UHF	HH	343.25	HYPER	HH	342.00	HH	343.25
45	45	659	657.25	UHF	II	349.25	HYPER	II	348.00	II	349.25
46	46	665	663.25	UHF	JJ	355.25	HYPER	JJ	354.00	JJ	355.25
47	47	671	669.25	UHF	KK	361.25	HYPER	KK	360.00	KK	361.25
48	48	677	675.25	UHF	LL	367.25	HYPER	LL	366.00	LL	367.25
49	49	683	681.25	UHF	MM	373.25	HYPER	MM	372.00	MM	373.25
50	50	689	687.25	UHF	NN	379.25	HYPER	NN	378.00	NN	379.25
51	51	695	693.25	UHF	OO	385.25	HYPER	OO	384.00	OO	385.25
52	52	701	699.25	UHF	PP	391.25	HYPER	PP	390.00	PP	391.25
53	53	707	705.25	UHF	QQ	397.25	HYPER	QQ	396.00	QQ	397.25
54	54	713	711.25	UHF	RR	403.25	HYPER	RR	402.00	RR	403.25
55	55	719	717.25	UHF	SS	409.25	HYPER	SS	408.00	SS	409.25
56	56	725	723.25	UHF	TT	415.25	HYPER	TT	414.00	TT	415.25
57	57	731	729.25	UHF	UU	421.25	HYPER	UU	420.00	UU	421.25
58	58	737	735.25	UHF	VV	427.25	HYPER	VV	426.00	VV	427.25
59	59	743	741.25	UHF	WW	433.25	HYPER	WW	432.00	WW	433.25
60	60	749	747.25	UHF	XX	439.25	HYPER	XX	438.00	XX	439.25
61	61	755	753.25	UHF	YY	445.25	HYPER	YY	444.00	YY	445.25
62	62	761	759.25	UHF	ZZ	451.25	HYPER	ZZ	450.00	ZZ	451.25
63	63	767	765.25	UHF	AAA	457.25	HYPER	AAA	456.00	AAA	457.25
64	64	773	771.25	UHF	BBB	463.25	HYPER	BBB	462.00	BBB	463.25
65	65	779	777.25	UHF	CCC	469.25	ULTRA	CCC	468.00	CCC	469.25
66	66	785	783.25	UHF	DDD	475.25	ULTRA	DDD	474.00	DDD	475.25
67	67	791	789.25	UHF	EEE	481.25	ULTRA	EEE	480.00	EEE	481.25
68	68	797	795.25	UHF	FFF	487.25	ULTRA	FFF	486.00	FFF	487.25
69	69	803	801.25	UHF	GGG	493.25	ULTRA	GGG	492.00	GGG	493.25

OSD	CH NO	AIR		BAND	CH NO		BAND	CH NO		CH NO	
		Air-DTV	Air-NTSC			Cable STD			Cable HRC		Cable IRC
70	70				HHH	499.25	ULTRA	HHH	498.00	HHH	499.25
71	71				III	505.25	ULTRA	III	504.00	III	505.25
72	72				JJJ	511.25	ULTRA	JJJ	510.00	JJJ	511.25
73	73				KKK	517.25	ULTRA	KKK	516.00	KKK	517.25
74	74				LLL	523.25	ULTRA	LLL	522.00	LLL	523.25
75	75				MMM	529.25	ULTRA	MMM	528.00	MMM	529.25
76	76				NNN	535.25	ULTRA	NNN	534.00	NNN	535.25
77	77				000	541.25	ULTRA	000	540.00	000	541.25
78	78				PPP	547.25	ULTRA	PPP	546.00	PPP	547.25
79	79				79	553.25	ULTRA	79	552.00	79	553.25
80	80				80	559.25	ULTRA	80	558.00	80	559.25
81	81				81	565.25	ULTRA	81	564.00	81	565.25
82	82				82	571.25	ULTRA	82	570.00	82	571.25
83	83				83	577.25	ULTRA	83	576.00	83	577.25
84	84				84	583.25	ULTRA	84	582.00	84	583.25
85	85				85	589.25	ULTRA	85	588.00	85	589.25
86	86				86	595.25	ULTRA	86	594.00	86	595.25
87	87				87	601.25	ULTRA	87	600.00	87	601.25
88	88				88	607.25	ULTRA	88	606.00	88	607.25
89	89				89	613.25	ULTRA	89	612.00	89	613.25
90	90				90	619.25	ULTRA	90	618.00	90	619.25
91	91				91	625.25	ULTRA	91	624.00	91	625.25
92	92				92	631.25	ULTRA	92	630.00	92	631.25
93	93				93	637.25	ULTRA	93	636.00	93	637.25
94	94				94	643.25	ULTRA	94	642.00	94	643.25
95	95				A-5	91.25	FM	A-5	90.00	A-5	91.25
96	96				A-4	97.25	FM	A-4	96.00	A-4	97.25
97	97				A-3	103.25	FM	A-3	102.00	A-3	103.25
98	98				A-2	109.25	MID	A-2	108.00	A-2	109.25
99	99				A-1	115.25	MID	A-1	114.00	A-1	115.25
100	100				100	649.25	ULTRA	100	648.00	100	649.25
101	101				101	655.25	ULTRA	101	654.00	101	655.25
102	102				102	661.25	ULTRA	102	660.00	102	661.25
103	103				103	667.25	ULTRA	103	666.00	103	667.25
104	104				104	673.25	ULTRA	104	672.00	104	673.25
105	105				105	679.25	ULTRA	105	678.00	105	679.25
106	106				106	685.25	ULTRA	106	684.00	106	685.25
107	107				107	691.25	ULTRA	107	690.00	107	691.25
108	108				108	697.25	ULTRA	108	696.00	108	697.25
109	109				109	703.25	ULTRA	109	702.00	109	703.25
110	110				110	709.25	ULTRA	110	708.00	110	709.25
111	111				111	715.25	ULTRA	111	714.00	111	715.25
112	112				112	721.25	ULTRA	112	720.00	112	721.25
113	113				113	727.25	ULTRA	113	726.00	113	727.25
114	114				114	733.25	ULTRA	114	732.00	114	733.25
115	115				115	739.25	ULTRA	115	738.00	115	739.25
116	116				116	745.25	ULTRA	116	744.00	116	745.25
.	.				.	.	.	.	.	.	.
.	.				.	.	.	.	.	.	.
125	125				125	799.25	ULTRA	125	798.00	125	799.25
.	.				.	.	.	.	.	.	.

2-3. Spec Comparison to the Old Models

Model	CORAL (LE26/32/37/40A457C1D)	JASMINE(LE26/32/37/40S86BD)
Design		
Display Type	LCD TV	LCD TV
Built-in Tuner	O	O
Resolution	1366 x 768	1366 x 768
LCD Panel	TFT LCD Panel 50Hz	TFT LCD Panel 50Hz
Screen Size	26”/32”/37”/40”	26”/32”/37”/40”
Picture ratio	16 : 9	16 : 9
Dimensions (W x H x D)	26 26.37 x 8.5 x 19.70 inches_with stand 26.37 x 2.97 x 17.74 inches_without stand 32 31.48 x 9.92 x 22.70 inches_with stand 31.48 x 3.11 x 20.68 inches_without stand 37 36.08 x 11.81 x 25.91 inches_with stand 36.08 x 3.22 x 23.66 inches_without stand 40 38.97 x 11.81 x 27.33 inches_with stand 38.97 x 3.22 x 25.22 inches_without stand	26 29.29 x 9.13 x 19.94 inches_with stand 29.29 x 3.18 x 17.61 inches_without stand 32 34.42 x 11.47 x 22.72 inches_with stand 34.42 x 3.18 x 20.90 inches_without stand 37 39.90 x 11.81 x 25.65 inches_with stand 39.90 x 3.65 x 23.71 inches_without stand 40 42.66 x 11.81 x 27.16 inches_with stand 42.66 x 3.73 x 25.13 inches_without stand
Weight	26 21.38 lbs (set) 32 28.87 lbs (set) 37 40.33 lbs (set) 40 45.41 lbs (set)	26 23.14 lbs (set) 32 30.86 lbs (set) 37 45.18 lbs (set) 40 47.39 lbs (set)
Brightness	450 ~ 500 nit	500 nit
Contrast Ratio	2000 ~ 3000 : 1	8000:1
Picture Enhacer	DNIe (FBE3)	DNIe (FBE2)
Equalizer	O	O
Surround Sound	SRS TruSurround Dolby Digital	SRS TruSurround Dolby Digital
Speaker Output	10W + 10W	10W + 10W
Antenna	1	1

2-4. Accessories


Product	Description	Code. No	Remark
	Remote Control & Batteries (AAA x 2)	BN59-00684A	Samsung Electronics Service center
	Power Cord	3903-000145	
	Cover-Bottom	26”, 32” = BN63-04269B 37”, 40” = BN63-04243B	
	Owner’s Instructions	BN68-01424A	
	Cleaning Cloth	BN63-01798A	
	Warranty Card / Registration Card / Safety Guide Manual (Not available in all locations)	-	
	Stand Screw x 4	6002-001294	
	Stand	26” = BN90-01511A 32” = BN90-01580A 37” = BN90-01575A 40” = BN90-01572A	


4. Troubleshooting

4-1. Troubleshooting


1. Check the various cable connections first.
   • Check to see if there is a burnt or damaged cable.
   • Check to see if there is a disconnected or loose cable connection.
   • Check to see if the cables are connected according to the connection diagram.
2. Check the power input to the Main Board.

4-1-1. No Power

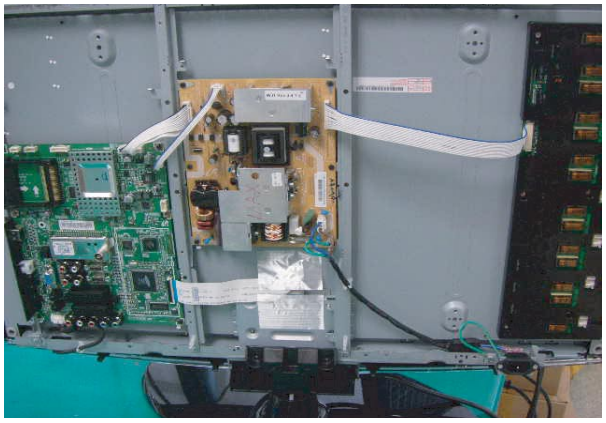Symptom	– The LEDs on the front panel do not work when connecting the power cord. – The SMPS relay does not work when connecting the power cord. – The units appears to be dead.
Major checkpoints	The IP relay or the LEDs on the front panel does not work when connecting the power cord if the cables are improperly connected or the Main Board or SMPS is not functioning. In this case, check the following: – Check the internal cable connection status inside the unit. – Check the fuses of each part. – Check the output voltage of SMPS. – Replace the Main Board.
Diagnostics	
Caution	Make sure to disconnect the power before working on the SMPS/IP.

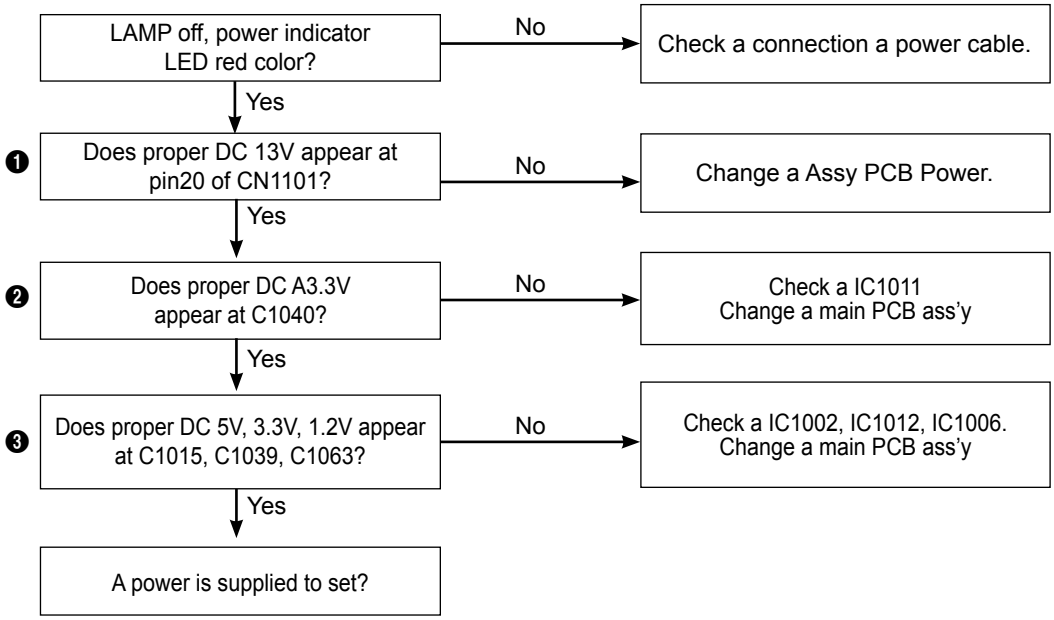


4-1-2. No Video (Analog PC signal)

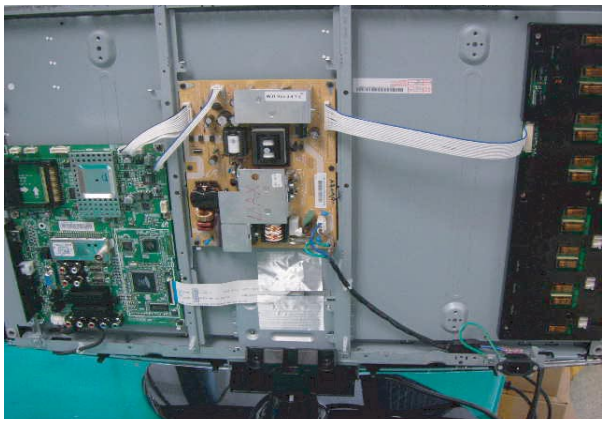
Symptom	– Audio is normal but no picture is displayed on the screen.
Major checkpoints	– Check the PC source – Check the SEMS01 – This may happen when the LVDS cable connecting the Main Board and the Panel is disconnected.
Diagnostics	
Caution	Make sure to disconnect the power before working on the SMPS/IP.

WAVEFORMS

❶	R,G,B Output Signal

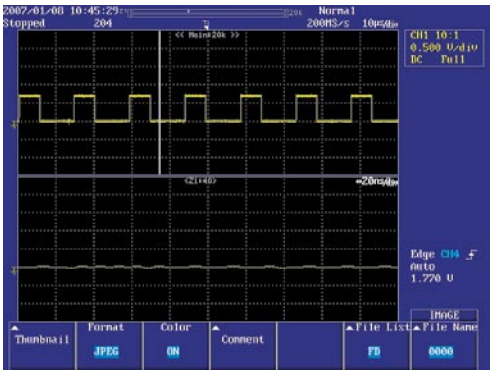


4-1-3. No Video (HDMI - Digital Signal)

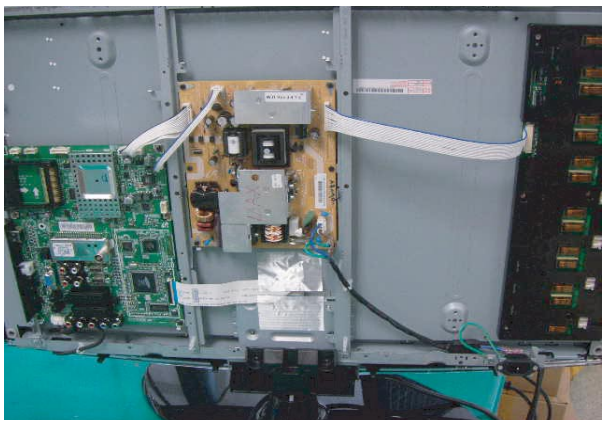
Symptom	– Audio is normal but no picture is displayed on the screen.
Major checkpoints	– Check the HDMI source – Check the SEMS01 – This may happen when the LVDS cable connecting the Main Board and the Panel is disconnected.
Diagnostics	
Caution	Make sure to disconnect the power before working on the SMPS/IP.

WAVEFORMS


❷	**Digital Output Data**

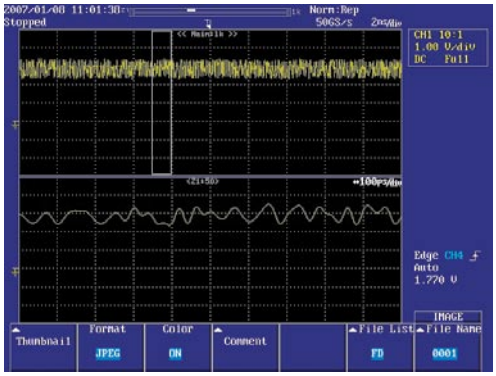


❸	**Signal of HDMI(Data)**

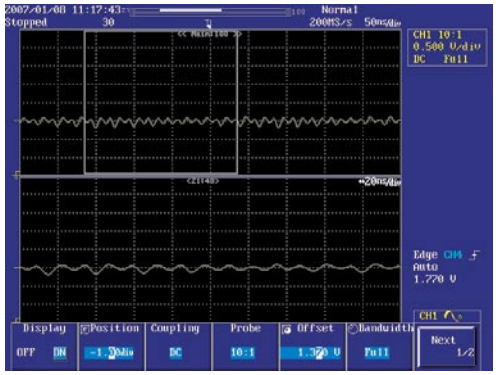


4-1-4. No Video (Tuner_CVBS)

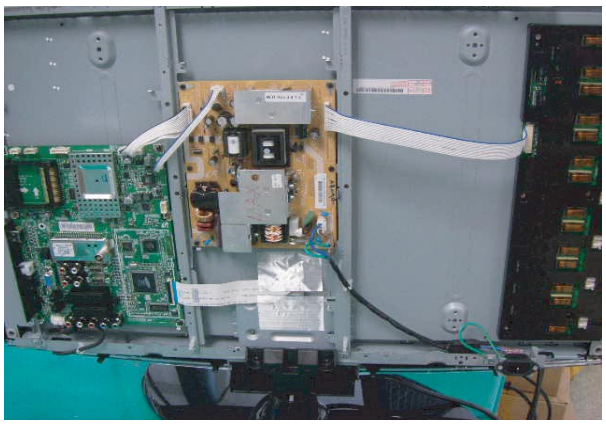Symptom	– Audio is normal but no picture is displayed on the screen.
Major checkpoints	– Check the Tuner CVBS source – Check the SEMS01 – This may happen when the LVDS cable connecting the Main Board and the Panel is disconnected.
Diagnostics	
Caution	Make sure to disconnect the power before working on the SMPS/IP.

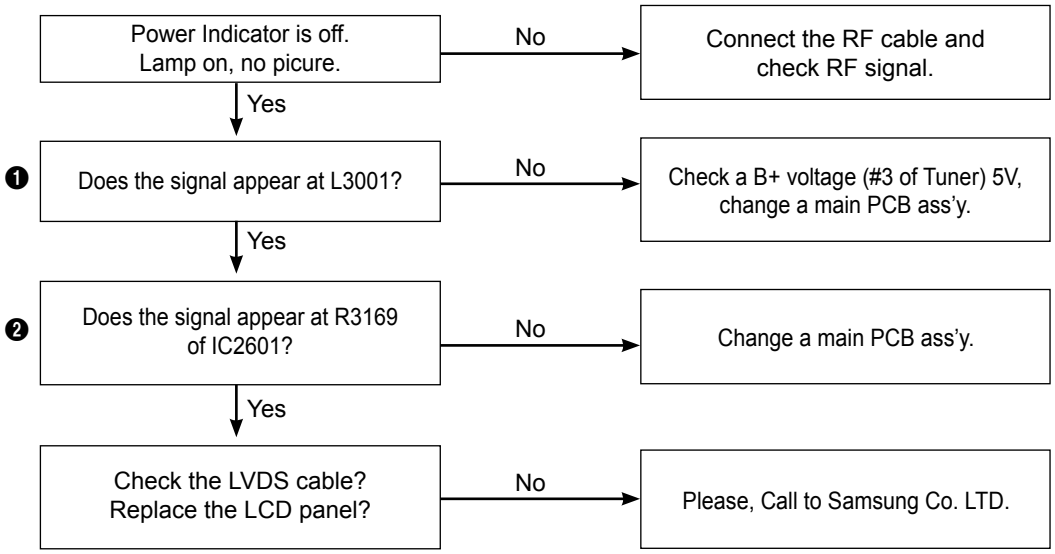


WAVEFORMS


❸	CVBS Output Signal

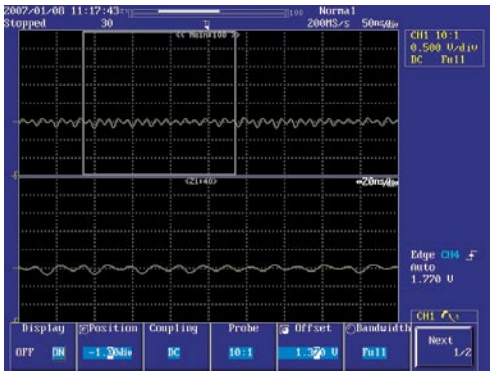


❹	Tuner_CVBS Output Signal

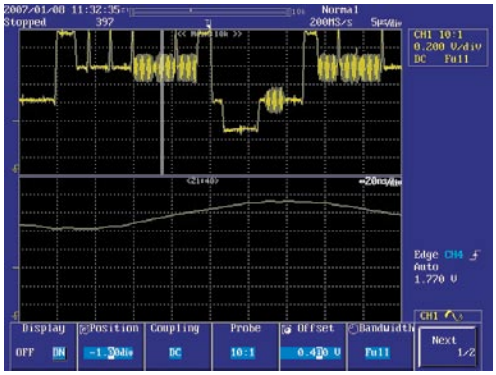


4-1-5. No Picture (S-VIDEO_Y,C)

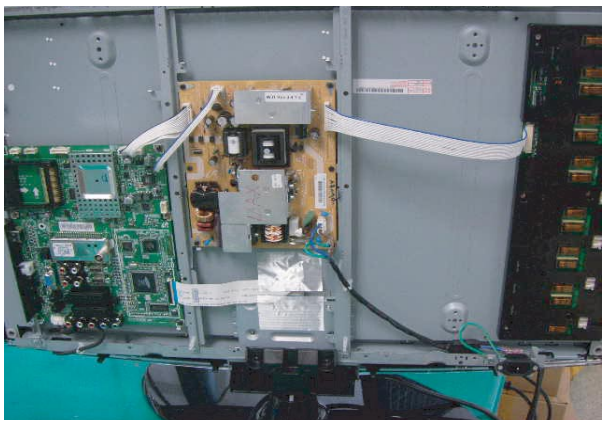Symptom	– Audio is normal but no picture is displayed on the screen.
Major checkpoints	– Check the S-Video_Y,C source – Check the SEMS01 – This may happen when the LVDS cable connecting the Main Board and the Panel is disconnected.
Diagnostics	
Caution	Make sure to disconnect the power before working on the SMPS/IP.

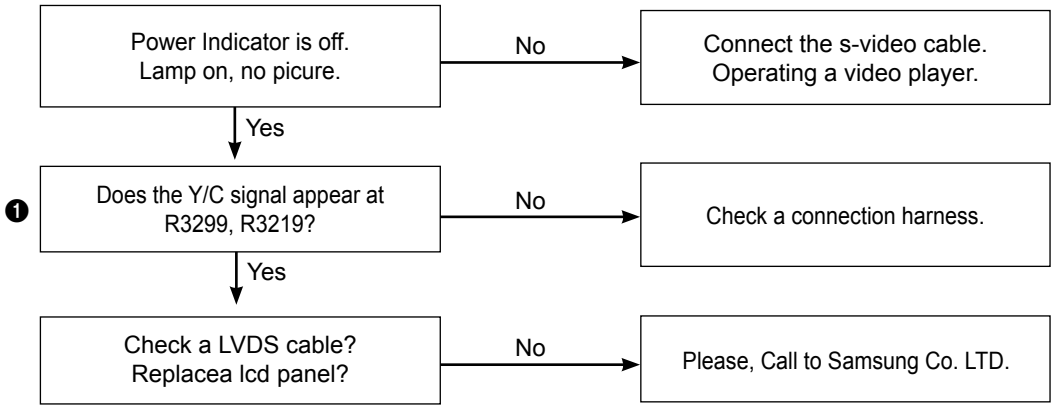


WAVEFORMS


❷	**Digital Output Data**

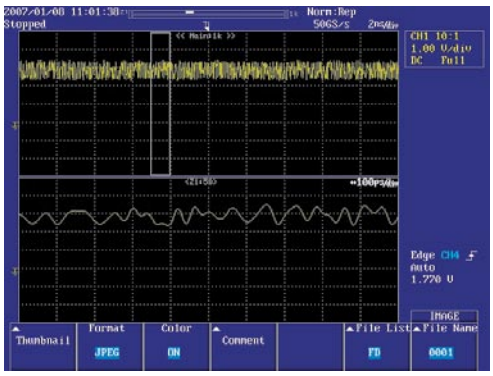

❺	**Analog Signal(Y,C)**

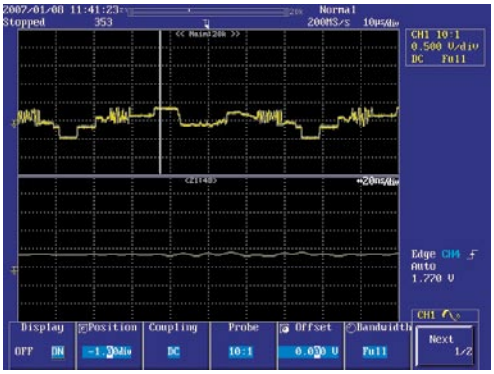


4-1-6. No Sound

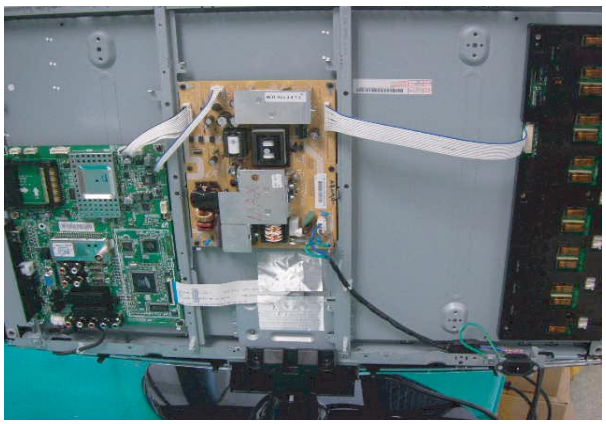
Symptom	– Audio is normal but no picture is displayed on the screen.
Major checkpoints	– Check the RF Source – Check the SEMS01 – This may happen when the LVDS cable connecting the Main Board and the Panel is disconnected.
Diagnostics	
Caution	Make sure to disconnect the power before working on the SMPS/IP.

WAVEFORMS

❻	**The Signal are Inputed to IC2002**

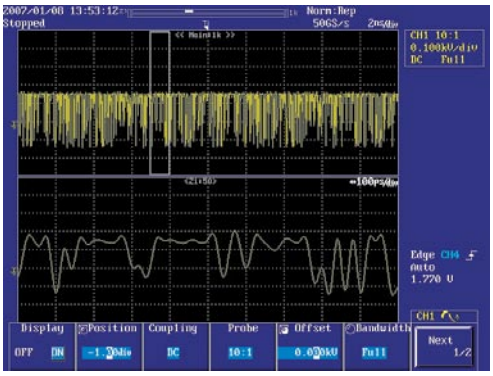

❼	**The Signal are Inputed to IC2001**

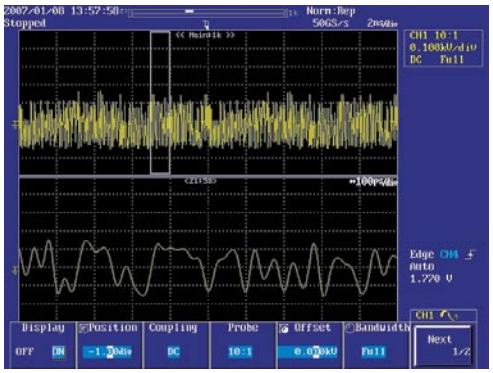

4-2. Alignments and Adjustments

4-2-1. General Alignment Instuction

1. Usually, a color LCD-TV needs only slight touch-up adjustment upon installation. Check the basic characteristics such as height, horizontal and vertical sync.
2. Use the specified test equipment or its equivalent.
3. Correct impedance matching is essential.
4. Avoid overload. Excessive signal from a sweep generator might overload the front-end of the TV. When inserting signal markers, do not allow the marker generator to distort test result.
5. Connect the TV only to an AC power source with voltage and frequency as specified on the backcover nameplate.
6. Do not attempt to connect or disconnect any wire while the TV is turned on. Make sure that the power cord is disconnected before replacing any parts.
7. To protect against shock hazard, use an isolation transformer.

4-3. Factory Mode Adjustments

4-3-1 Entering Factory Mode

To enter 'Service Mode' Press the remote -control keys in this sequence :

- If you do not have Factory remote - control

INFO → MENU → MUTE → Power on

- If you have Factory remote - control

PICTURE ON → DISPLAY → FACTORY

- The buttons are active in the service mode.

1. Remote - Control Key : Power, Arrow Up, Arrow Down, Arrow Left
   Arrow Right, Menu, Enter, Number Key(0~9)
2. Function - Control Key : Power, CH +, CH -, VOL +, VOL -,
   Menu, TV/VIDEO(Enter)

4-3-2 Panel Check

You have to check Panel Maker Because of different adjustments as follows.
First of all, Check the label rating!

1) Label Rating File
   - LCD PANEL MARK
     A:ACER(AUO), S : SEC, C : CMO

* If not printed you could consider S(sec) panel mark.

4-3-3 Factory Data

1. Option Table(Service)
2. WB Adjust
3. Information

Checksum

T-CRL32PEUMD-XXXX (Main Micom Ver.)

T-PNRPEUS-xxxx (Sub Micom Ver)
Month / Day / Year / Hour / Min. / Sec.

4. Advanced Menu

1. Option Table(Service)

Factory Reset	Default
Ready	Off/On
Panel Inch	26”/32”/37”/40”
Dimm Type	INT/INT_NEG/EXT_POS/EXT_NEG/EXT
Panel Type	26AU_AG/26CM_NG/32AU_AG/32AU_NG/32CM_NG/37AU_AG/40AU_AG/40AM_AG
Model Option	Jade/Tanzanite/Pyrope/Pyrope_3D/Carnelian/Carnelian_3d/Amber/Coral
Anynet+	On/Off
Light Effect	On/Off
TTX	On/Off
TTX List	FLOF/List
TTX Group	Lang OSD/W Europe/E Europe/Russia/Greek/Turkey/Arab/Farsi/ArabHbrw
Carrier Mute	On/Off
High Devi	On/Off
Volume Curve	EU/EA
HotPlug	On/Off
HotPlugCtrl	On/Off
HotPlugDelay	0~63
Auto Power	On/Off
LNA Menu	On/Off
Hotel Option	On/Off
D.Gamma	On/Off
PC Ident	On/Off
Language	English/Germany/French/Italia/Spain/Netherland/Portuguese/Greek/Czech/Serbian/ Croatian/Romanian/Hungarian/Polish/Russian/Bulgarian/Turkish/Swedish/Norwgian/ Danish/Finnish
Ch Table	SUWON/SESK/SEH/TTSEC/SEIN/SDMA/TSED/SAVINA/Lang OSD
DDR	Etron
Shop Mode	On/Off
Nordic	On/Off
NT Conversion	On/Off
Control	WM Calib(On/Off), EDID Protect(On/Off), EDID Type(L12_1366_768), EDID Write(0x4D,0), WB Data Reset(On/Off), EEPROM Reset, Logic Download(On/Off), LVDS Format(Default/ JEIDA/VESA)
PDP Filter	
PDP Group	
Spread Spectrum	

2. WB Adjust

Calibration
White Balance
EPA Standard
Movie WB

3. Information

Checksum

T-CRL32PEUMD-XXXX (Main Micom Ver.)

T-PNRPEUS-xxxx (Sub Micom Ver)
Month / Day / Year / Hour / Min. / Sec.

4. Advanced Menu

I. MST68981

1) ADC Calibration

ADC Calibration	AV	
	CVBS Y Offs	137
	CVBS Y Gain	159
	Ana Y/G Offs	128
	Ana U/B Offs	128
	Ana V/R Offs	128
	Ana Y/G Gain	128
	Ana U/B Gain	128
	Ana V/R Gain	128
	RGB R Offs	61
	RGB G Offs	61
	RGB B Offs	61
	RGB R Gain	112
	RGB G Gain	112
	RGB B Gain	112

2) Calibration Target

AV ADC Target	Low	17
	High	234
	Delta	3

Comp ADC Target	Low	17
	High	234
	Delta	3

PC ADC Target	Low	1
	High	254
	Delta	3

ALL RGB Target	Low	2
	High	235
	Delta	1

3) IPC/MJC

4) Picture Enhance

Sharpness	H1 Gain	32
	H2 Gain	20
	H3 Gain	12
	H4 Gain	12
	V1 Gain	18
	V2 Gain	16
	D1 Gain	10
	D2 Gain	10
	Over Shoot2	96
	Over Shoot3	32
	Under Shoot2	96
	Under Shoot3	32
	Sub Color	64

II. Option Block

1) FBE

Pattern Select	0
B-Slope Gain	80
B-Tilt Min	20
B-Tilt Max	120
Lfunc-Basis	60
Hfunc-Basis	70
Mean-Offset1	30
Mean-Offset2	235
Mean Slope	112
ACR Offset	10
ACR Th1	10
ACR Th2	110
Skin Enable	1
Skin Uv	128
Mskin Uv	128
Sub Color	128
Msub Color	128

2) FRCS

3) FRCM

4) LD

5) PDP LOGIC

III. Sound

Saturation Mute	Off
FM Prescale	26
AM Prescale	24
Nicam Prescale	24
FM M Prescale	20
SC1 Vol	16
SC2 Vol	16
Audio Delay	On
Audio Delay Time	8
Ch1BW	2
Ch2BW	1
Num of Check	1
Num of Double Check	5
Mono Weight	1
Stereo Weight	1
Dual Weight	1
BG M2S Threshold	144
DK M2S Threshold	80
BG S2M Threshold	176
DK S2M Threshold	0
FINE Vol	20
Detection Threshold	
Ext Volume Scale	0
Ext Prescale Speaker	0
R2E Scart2 Offset	2
NTP3000	
NTP Master Volume	30
NTP PWM Modulation	254
NTP DRC Thresh	6
NTP Speaker EQ	On

IV. YC Delay

PAL BG	4
PAL DK	4
PAL I	4
SECAM BG	5
SECAM DK	5
SECAM L	4
NTSC 358	17
NTSC 443	1
AV PAL	1
AV SECAM	2
AV NT358	17
AV NT443	1
AV PAL60	17

V. Adjust

Video Mute time	8
Dynamic Dimming	Off
Dynamic CE	On
LNA Plus	
Megazine LNA	Off
DTV WatchDog	On
Main WatchDog	Off
UART Select	Off
Debug Mode	Normal
BackEndMute	Off
Tuner Select	ALPS_Slim
Tuner TOP Semco	10
Tuner TOP Alps	13
PixelShift Test	Off
FBE Select	FBE3
Hp Detexct	High
D WatchDog Count	0
Visual Test	Off

VI. Bus Stop

VII. Defect Log

1) LogList1

2) LogList2

3) LogList3

4-4. White Balance - Calibration


4-4-1 White Balance -Calibration

1. Calibration	→	AV Calibration Comp Calibration PC Calibration HDMI Calibration

4-4-2 Service Adjustment - You must perform Calibration in the Lattice Pattern before adjusting the White Balance.

■ Color Calibration

Adjust spec.
1. Source : HDMI
2. Setting Mode : 1280*720@60Hz
3. Pattern : Pattern #24 (Chess Pattern)

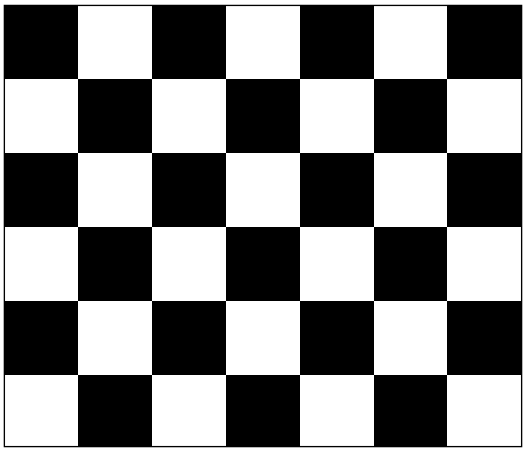

(Chess Pattern)

4. Use Equipment : CA210 & Master MSPG925 Generator

- Use other equipment only after comparing the result with that of the Master equipment.

Input mode	Calibration	Pattern
CVBS IN (Model_#2)	Perform in PAL B&W Pattern #24	Lattice
Component IN (Model_#6)	Perform in 720p B&W Pattern #24	Lattice
PC Analog IN (Model_#21)	Perform in VESA XGA (1024x768) B&W Pattern #24	Lattice
HDMI IN (Model_#6)	Perform in 720p B&W Pattern #24	Lattice

<Table 1>

■ Method of Color Calibration (AV)

1) Apply the NTSC Lattice (N0. 3) pattern signal to the AV IN 1 port
2) Press the Source key to switch to “AV1” mode
3) Enter Service mode
4) Select the “Calibration” menu
5) Select the “AV Calibration” menu.
6) In “AV Calibration Off” status, press the “►” key to perform Calibration.
7) When Calibration is complete, it returns to the high-level menu.
8) You can see the change of the “AV Calibration” status from Failure to Success.

■ Method of Color Calibration (Component)

1) Apply the 720p Lattice (N0. 6) pattern signal to the Component IN 1 port
2) Press the Source key to switch to “Component1” mode
3) Enter Service mode
4) Select the “Calibration” menu
5) Select the “Comp Calibration” menu.
6) In “Comp Calibration Off” status, press the “►” key to perform Calibration.
7) When Calibration is complete, it returns to the high-level menu.
8) You can see the change of the “Comp Calibration” status from Failure to Success.

■ Method of Color Calibration (PC)

1) Apply the VESA XGA Lattice (N0. 21) pattern signal to the PC IN port
2) Press the Source key to switch to “PC” mode
3) Enter Service mode
4) Select the “Calibration” menu
5) Select the “PC Calibration” menu.
6) In “PC Calibration Off” status, press the “►” key to perform Calibration.
7) When Calibration is complete, it returns to the high-level menu.
8) You can see the change of the “PC Calibration” status from Failure to Success.

■ Method of Color Calibration (HDMI)

1) Apply the 720p Lattice (N0. 6) pattern signal to the HDMI1/DVI IN port
2) Press the Source key to switch to “HDMI1” mode
3) Enter Service mode
4) Select the “Calibration” menu
5) Select the “HDMI Calibration” menu.
6) In “HDMI Calibration Off” status, press the “►” key to perform Calibration.
7) When Calibration is complete, it returns to the high-level menu.
8) You can see the change of the “HDMI Calibration” status from Failure to Success.

4-4-3 White Balance - Adjustment


		(low light)	(hight light)
3. W/B	→	Sub Bright R offset G offset B offset	Sub Contrast R gain G gain B gain

(W/B adjustment Condition refer next page)

4-5. White Ratio (Balance) Adjustment

1. You can adjust the white ratio in factory mode (1:Calibration, 3:White-Balance).
2. Since the adjustment value and the data value vary depending on the input source, you have to adjust these in CVBS, Component 1 and HDMI 1 modes.
3. The optimal values for each mode are configured by default. (Refer to Table 1, 2)
   It varies with Panel's size and Specification.

- Equipment : CS-210
- Pattern: MIK K-7256 #92 "Flat W/B Pattern" as standard
- Use other equipment only after comparing the result with that of the Master equipment.
- Set Aging time : 60min

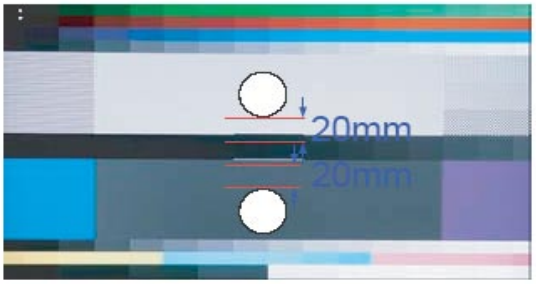

- Calibration and Manual setting for WB adjustment.

HDMI : Time #6 720P, Pattern #24 Chessboard Calibration	→	Manual adjustment #92 pattern (720p)
COMP: Time #6 720P, Pattern #24 Chessboard Calibration	→	Manual adjustment at #92 pattern (720p)
CVBS: Time #2 PAL, Pattern #24 Chessboard Calibration	→	Manual adjustment at #92 pattern (NTSC)
PC: Time #21 1024*768, Pattern #24 Chessboard Calibration	→	Manual adjustment at #92 pattern (NTSC)


- If finishing in HDMI mode, adjustment coordinate is almost same in AV/COMP mode.
- White Balance Manual Adjustment




	CA-210				
		x	y	Y(L)	T(K) + MPCD
CVBS (NTSC)	H/L	272	287	- (Sub_CT:145)	11,000 (+10)
	L/L	272	287	12.2cd/m² (3.52 Ft - Sub_BR:128)	11,000 (+10)
COMP (720P)	H/L	272	287	- (Sub_CT:145)	11,000 (+10)
	L/L	272	287	12.1cd/m² (3.5 Ft - Sub_BR:128)	11,000 (+10)
HDMI (720P)	H/L	272	287	- (Sub_CT:145)	11,000 (+10)
	L/L	272	287	12.0cd/m² (3.5 Ft - Sub_BR:128)	11,000 (+10)

- Adjustment Specification
  White Balance : High light (±3), Low light (±5)
  Luminance : High light (±0.1Ft/L), Low light (±0.1Ft/L)




4-6. HOW TO UPGRADE

4-6-1 ATV S/W

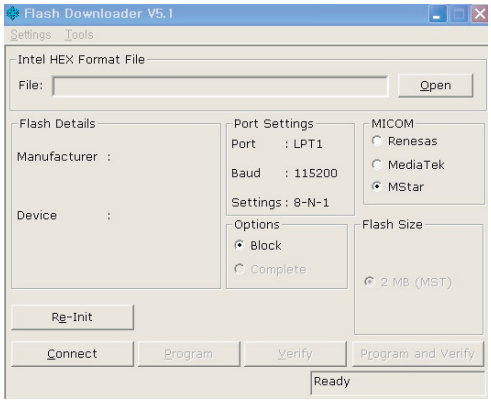Order	Description	ETC.
1	Open the Flash Downloader.		
2	Connect DDC Manager to the TV Set with D-SUB Cable.		

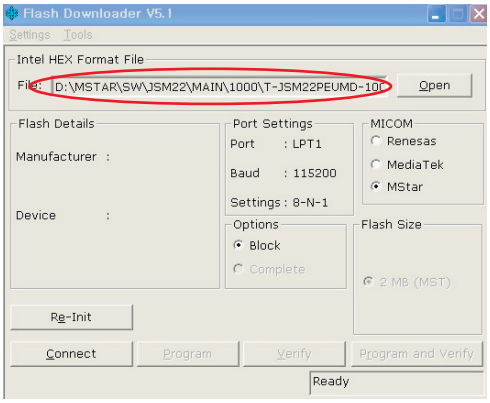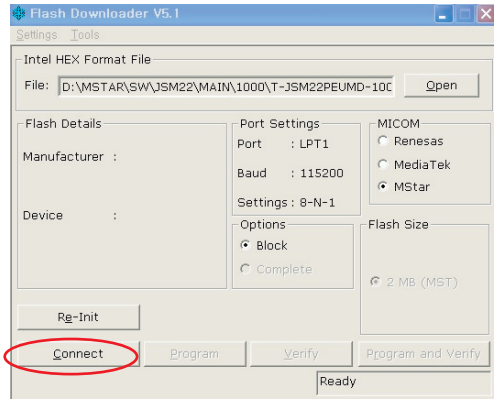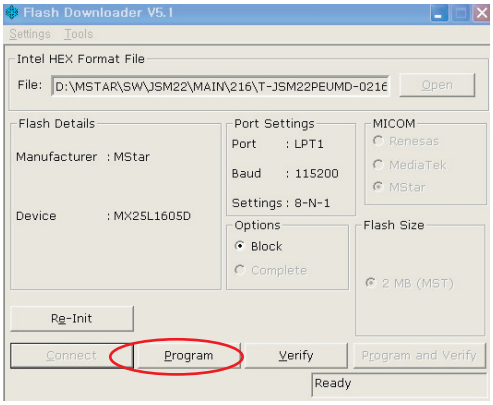Order	Description		ETC.
3	Open the Flash Downloader.		
4	Click “Connect”		Before clicking the icon, TV shoud be turned on.
5	Click “Program”		

4-6-2 DTV S/W

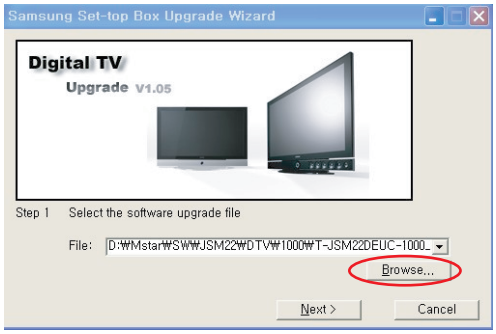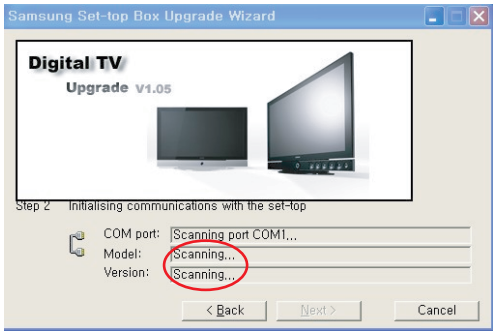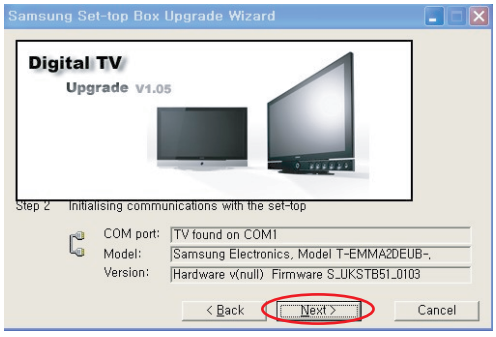Order	Description		ETC.
1	Connect PC and TV Set with Serial cable. TV should be turned on.		
2	Open the Samsung Set-top Box upgrade Wizard.		
3	1) Choose the DTV S/W by clicking “Browse” 2) After choosing the S/W, click the “Next” icon.		
4	1) Choose the DTV S/W by clicking “Browse” 2) After choosing the S/W, click the “Next” icon.		It doesn’t matter soft or hard power off and on.
5	After scaning COM port, Model, and Version, click “Next”		

4-6-3 After S/W Upgrade

■ How to Access Service Mode

■ Entering Factory Mode

<Power OFF> → <INFO> → <MENU> → <MUTE> → <Power ON>

■ Factory Data

1. Option Table(Service)
2. WB Adjust
3. Information
4. Advanced Menu
   If you want to enter here, press “0000”.


■ How to Initialize.

Click “1. Option Table(Service)” → “Factory Reset” in Factory Menu.
You can make every setting in Factory Initial Status.

Memo

5. Exploded View & Part List


5-1. LE26A45*C** Exploded View

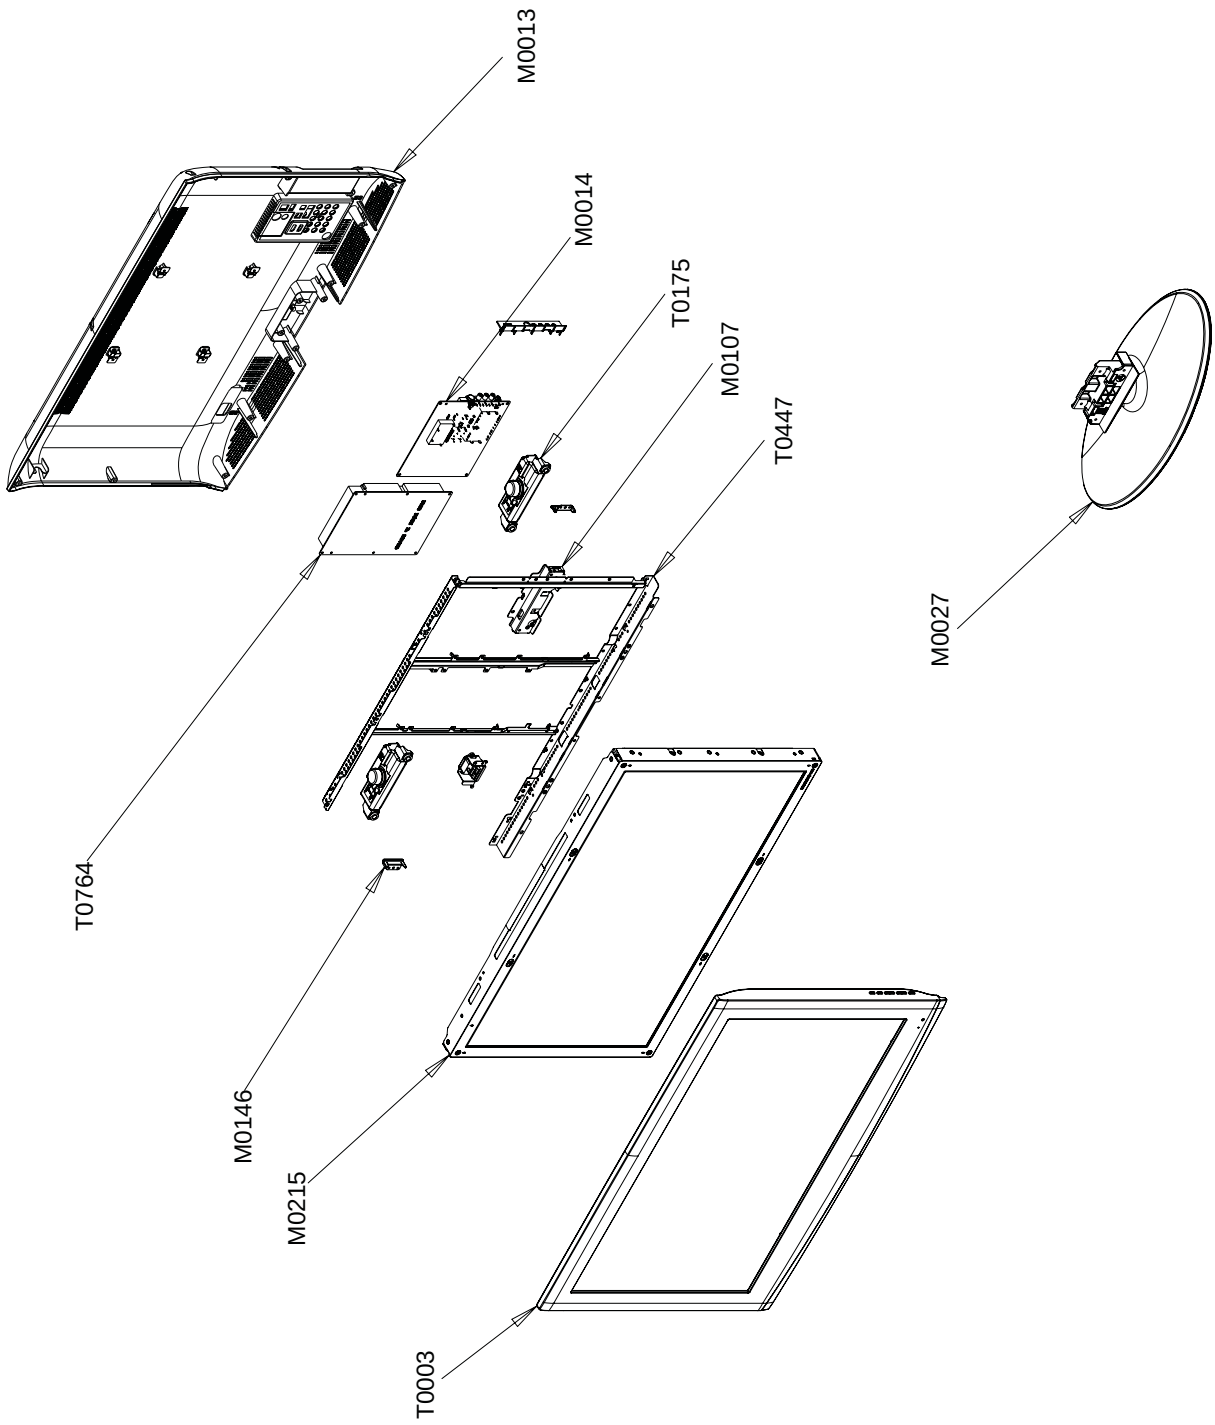

5-1-2. LE26A45*C** Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-06783D	ASSY COVER P-FRONT;26L450,EO(iDTV),ABS+P	1	S.A	
M0215	BN07-00510A	LCD-PANEL;T260XW02 VL	1	S.A	
T0175	BN96-06822B	ASSY SPEAKER P;8ohm,CORAL,LCD 26",5W,4pi	1	S.A	
M0115	BN61-02947A	BRACKET-STAND LINK;JASMINE 32",SECC,T1.6	1	S.A	
M0254	BN61-03699A	HOLDER-SIDE AV;32L450,EO,HIPS,V0,-,-,-,B	1	S.N.A	
T0447	BN96-06957A	ASSY BRACKET P-PANEL;26A450C,SECC,T1.0,C	1	S.N.A	
M0146	BN61-03682A	BRACKET-PANEL TOP;L450 26INCH,SECC,T1.0	1	S.N.A	
M0014	BN94-01672A	ASSY PCB MAIN-AUO;LE26A456C1DXXC,N50A	1	S.A	
T0764	BN44-00214A	SMPS-LCDTV;MK32P5B,DYREL,AC/DC,137W,AC10	1	S.A	
M0013	BN96-07209B	ASSY COVER P-REAR;26L450,EO(iDTV),HIPS,H	1	S.A	
M0027	BN96-06463A	ASSY STAND P-BASE;26L450,,ABS+PMMA,HB,BK	1	S.A	


5-2. LE32A45*C** Exploded View

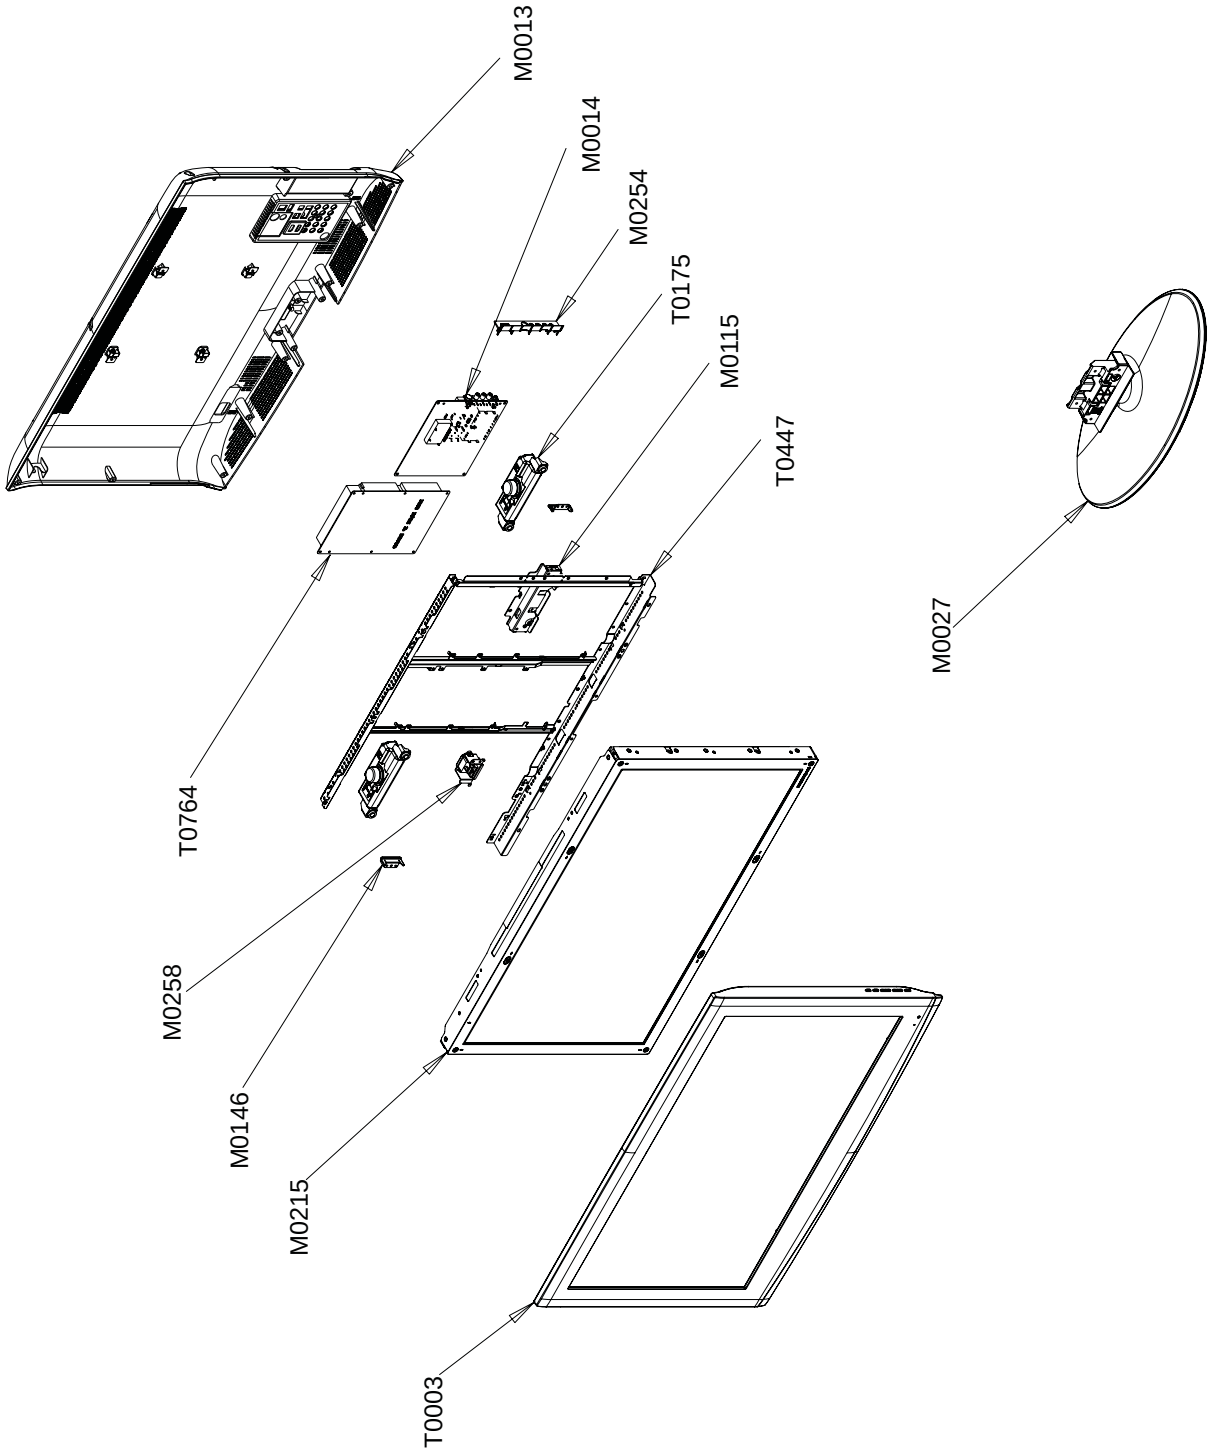

5-2-1. LE32A45*C** Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-06784E	ASSY COVER P-FRONT;32L456,EO(iDTV),ABS+P	1	S.A	
M0215	BN07-00511A	LCD-PANEL;T315XW02 VL	1	S.A	
T0175	BN96-06818C	ASSY SPEAKER P;8ohm,CORAL,L450,10W,550/3	1	S.A	
M0115	BN61-02947A	BRACKET-STAND LINK;JASMINE 32",SECC,T1.6	1	S.A	
M0254	BN61-03699A	HOLDER-SIDE AV;32L450,EO,HIPS,V0,-,-,-,B	1	S.N.A	
T0447	BN96-06958B	ASSY BRACKET P-PANEL;32A450C,SECC,T1.0,C	1	S.N.A	
M0146	BN61-03678B	BRACKET-PANEL TOP;L450 32INCH,SECC,T1.2,	1	S.N.A	
T0764	BN44-00221A	SMPS-LCDTV;MK32P5B,DELTA,AC/DC,137W,AC10	1	S.A	
M0014	BN94-01672B	ASSY PCB MAIN-AUO;LE32A456C1DXXC,N50A	1	S.A	
M0013	BN96-07208B	ASSY COVER P-REAR;32L450,EO(iDTV),HIPS,H	1	S.A	
M0027	BN96-07211A	ASSY STAND P-BASE;32L450,W/W,ABS+PMMA,HB	1	S.A	


5-3. LE37A45*C** Exploded View

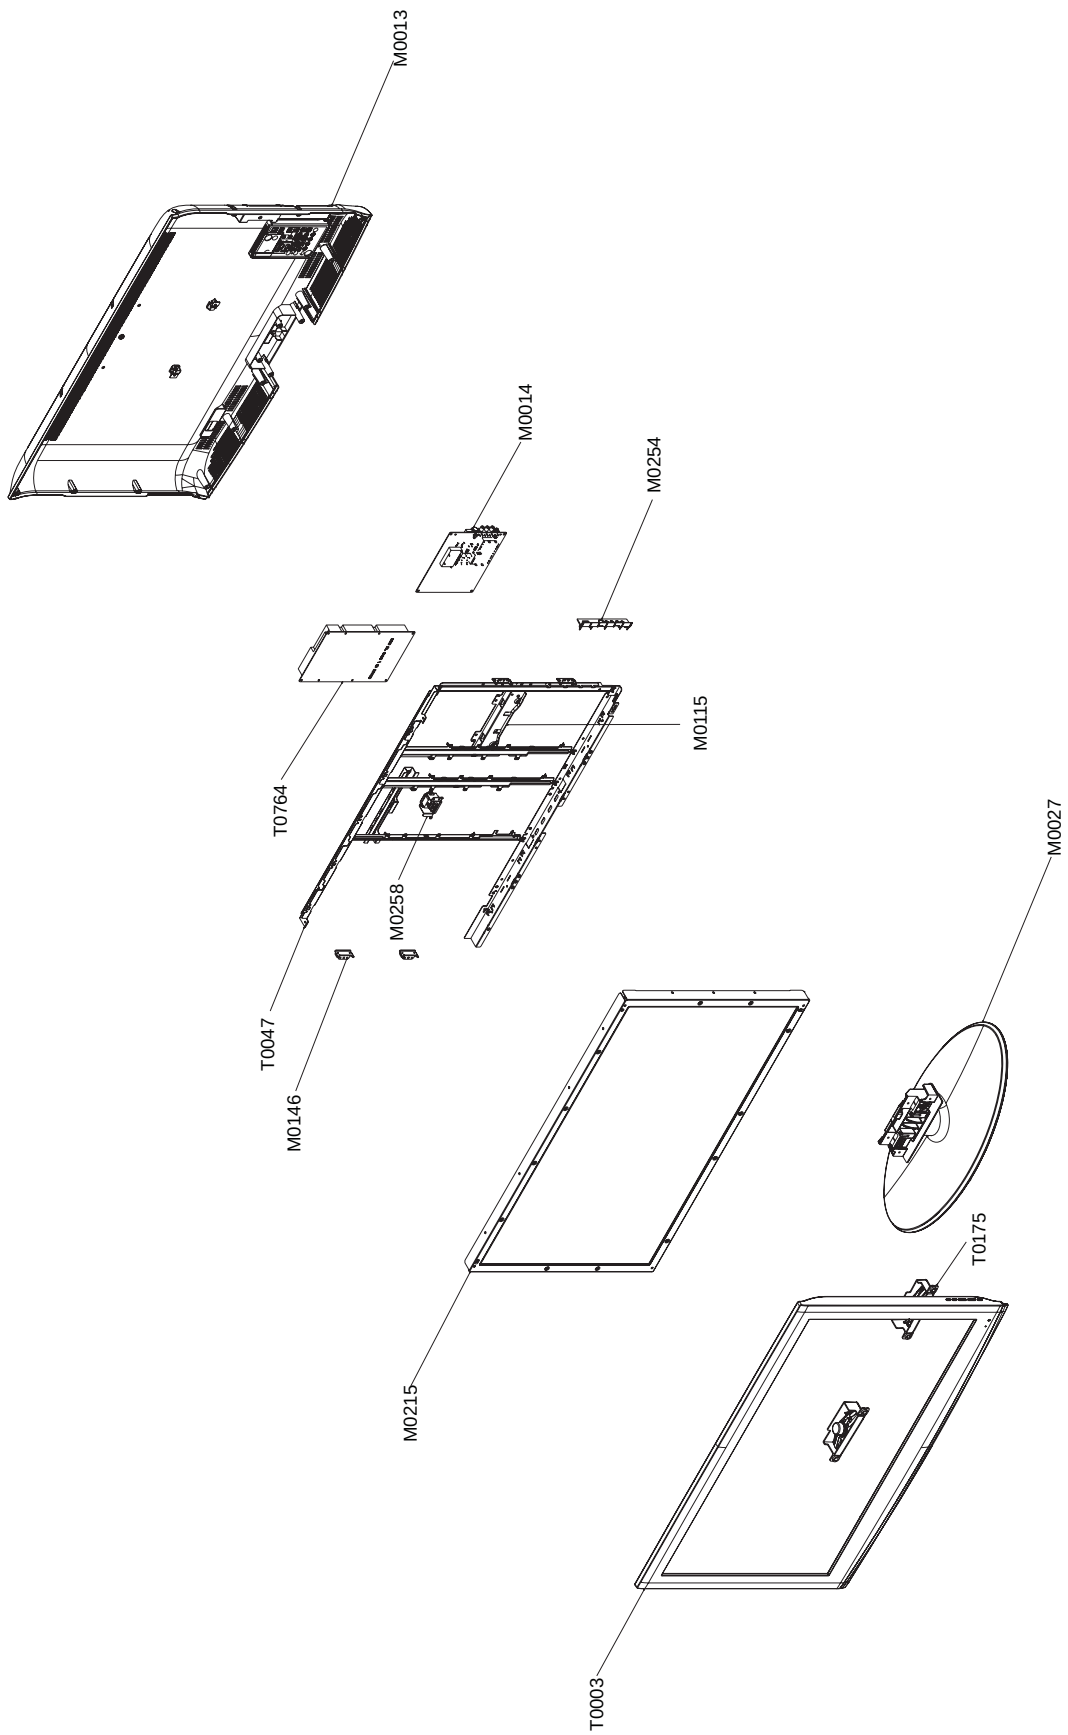

5-3-1. LE37A45*C** Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-06785D	ASSY COVER P-FRONT;37L450,EO(iDTV),ABS+P	1	S.A	
M0215	BN07-00513A	LCD-PANEL;T370XW02 VC	1	S.A	
T0175	BN96-06818C	ASSY SPEAKER P;8ohm,CORAL,L450,10W,550/3	1	S.A	
M0115	BN61-02882A	BRACKET-STAND LINK;TULIP,40,SECC,T1.6,-,	1	S.A	
M0254	BN61-03699A	HOLDER-SIDE AV;32L450,EO,HIPS,V0,-,-,-,B	1	S.N.A	
T0447	BN96-06959B	ASSY BRACKET P-PANEL;37L450,AUO,,SECC,T1	1	S.N.A	
M0146	BN61-03684A	BRACKET-PANEL TOP;37L450,SECC,T1.0,-,-,-	1	S.N.A	
M0014	BN94-01672C	ASSY PCB MAIN-AUO;LE37A456C1DXXC,N50A	1	S.A	
T0764	BN44-00217A	SMPS-LCDTV;MK37P5B,SEM,AC/DC,171W,AC100	1	S.A	
M0013	BN96-07207B	ASSY COVER P-REAR;37L450,EO(iDTV),HIPS,H	1	S.A	
M0027	BN96-06259A	ASSY STAND P-BASE;37,40L450,,ABS+PMMA,HB	1	S.A	

5-4. LE40A45*C** Exploded View

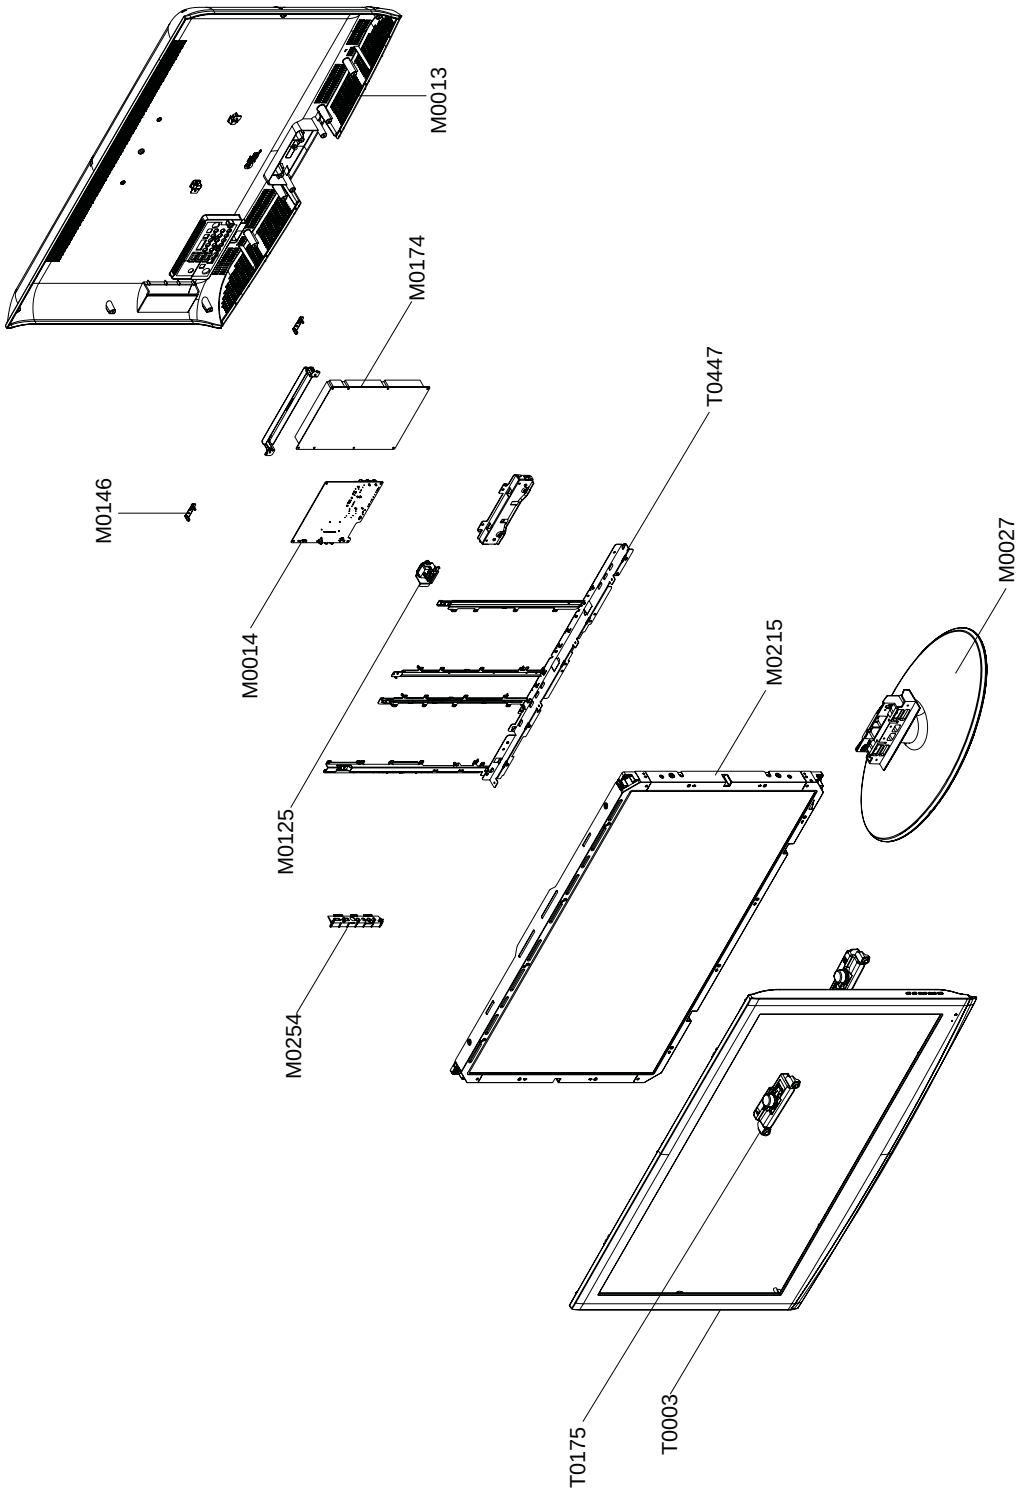

5-4-1. LE40A45*C** Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-06786E	ASSY COVER P-FRONT;40L456,EO(iDTV),ABS+P	1	S.A	
M0215	BN07-00523A	LCD-PANEL;LTF400AA01	1	S.A	
T0175	BN96-06818D	ASSY SPEAKER P;8ohm,CORAL,L450,10W,400/6	1	S.A	
M0115	BN61-02882A	BRACKET-STAND LINK;TULIP,40,SECC,T1.6,-,	1	S.A	
T0447	BN96-06960A	ASSY BRACKET P-PANEL;40A450C,SECC,T1.0,C	1	S.N.A	
M0146	BN61-03415A	BRACKET-PANEL TOP;PEONY 46,SECC T1.2	2	S.N.A	
M0014	BN94-01672D	ASSY PCB MAIN-AUO;LE40A456C1DXXC,N50A	1	S.A	
M0125	BN96-04938B	ASSY INLET P;UL1617#22,250/250mm	1	S.A	
M0254	BN61-02952K	HOLDER-SIDE AV;32S81,EO(HOTEL),HIPS,V0,-	1	S.N.A	
M0013	BN96-07204B	ASSY COVER P-REAR;40L450,EO(iDTV),HIPS,H	1	S.A	
M0027	BN96-06259A	ASSY STAND P-BASE;37,40L450,,ABS+PMMA,HB	1	S.A	

5-5. LE26A45*C** Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE26A457C1DXXC	LE26A457C1D,N50A/26AC1-GCR,26,LCD-TV,SPA			
0.1	M0001	BN90-01500D	ASSY COVER FRONT;26L450,EO(iDTV)	1	S.N.A	
..2	T0003	BN96-06783D	ASSY COVER P-FRONT;26L450,EO(iDTV),ABS+P	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	1	S.N.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
...3	T0069	AA60-00091K	SPACER-FELT;-,FELT,330X10,-,-,BLK,T0.35,	2	S.N.A	
...3	T0069	AA60-00091N	SPACER-FELT;-,FELT,70X10,-,-,BLK,T1.0,-,	1	S.N.A	
...3	T0069	BN60-00048A	SPACER-FELT;50Q9,FELT,620L,BLK,0.35T,10W	2	S.N.A	
...3		BN61-03676B	HOLDER-BOSS BOTTOM;26L450,EO,HIPS,HB,-,-	1	S.N.A	
...3	CCM1	BN63-02183D	COVER-SHEET;Rhcm,PE Vinyl,T0.05,680mm,20	0.559	S.N.A	
...3	M0112	BN63-04168D	COVER-FRONT;26L450,EO(iDTV),ABS+PMMA,-,-	1	S.N.A	
...3	T0059	BN64-00379A	INDICATOR LED;ROME-II,23,PC,CLEAR	1	S.N.A	
...3	T0061	BN64-00453A	WINDOW-REMOCON;32R71,PC,V0,VIOLET,DIFFUS	1	S.N.A	
...3	T0022	BN64-00755A	KNOB-CONTROL;32L450,ABS,V0,BK07	1	S.N.A	
...3		BN64-00757A	DECORATION-BOTTOM;L450 26INCH,PC,-,-,-,-	1	S.N.A	
...3	M0145	BN96-07269A	ASSY BOARD P-FUNCTION;LN40A450C1D,CT5000	1	S.A	
...3	M0146	BN96-07270D	ASSY BOARD P-POWER & IR;LN32A450C1D,CT50	1	S.A	
...3		BN61-03261B	BOSS-TAPE;Tulip,ACRYL,T1.1,W20mm,GRAY,TA	0.8	S.N.A	
..2	T0175	BN96-06822B	ASSY SPEAKER P;8ohm,CORAL,LCD 26",5W,4pi	1	S.A	
0.1	M0216	BN90-01511A	ASSY STAND;26L450,UO,,,	1	S.N.A	
..2	M0027	BN96-06463A	ASSY STAND P-BASE;26L450,,ABS+PMMA,HB,BK	1	S.A	
...3	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.A	
...3	M0081	6003-001239	SCREW-TAPTITE;FH,+,-,B,M4,L10,ZPC(WHT),S	4	S.A	
...3	T0920	BN61-03680A	GUIDE-STAND;22,26L450,ABS HB,-,-,-,BK500	1	S.N.A	
...3	T0004	BN63-03122A	COVER-STAND BASE;23,26R81,ABS+PMMA,-,-,-	1	S.N.A	
...3		BN61-02954A	BRACKET-STAND BOTTOM;23,26 BORDEAUX PLUS	1	S.N.A	
...3	T0132	BN73-00052A	RUBBER FOOT;ARES 17,CR Rubber Gray,T1.5	4	S.N.A	
..2	T0524	6902-000561	BAG PE;HDPE+NITRON(DOUBLE),T0.015+T0.5,W	1	S.N.A	
0.1	M0002	BN90-01578B	ASSY COVER REAR;26L450,EO(iDTV)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	11	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	M0013	BN96-07209B	ASSY COVER P-REAR;26L450,EO(iDTV),HIPS,H	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	4	S.N.A	
...3	T0101	BN61-03346A	BRACKET-WALL;LCD TV,SECC,T1.2	4	S.N.A	
...3	M0006	BN63-04244B	COVER-REAR;26L450,EO(iDTV),HIPS,HB,BK500	1	S.N.A	
...3	T0071	BN64-00758A	INLAY-TERMINAL;26,32,37L450,PS SHEET,T0.	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
0.1	M0017	BN91-02045A	ASSY CHASSIS;LE26A456C1DXXC,N50A	1	S.N.A	
..2	M0014	BN94-01672A	ASSY PCB MAIN-AUO;LE26A456C1DXXC,N50A	1	S.A	
...3		0202-001557	SOLDER-CREAM;LST57-A,D38-63,42SN/57BI/1A	11	S.N.A	
...3	JA3003_3H	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	JA3004	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	JA7201_OP	3709-001508	CONNECTOR-CARD SLOT;68P,1.27mm,PIN,PCMCI	1	S.A	
...3	CN330	3711-000012	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5MM,ST	1	S.A	
...3	CN330	3711-003846	HEADER-BOARD TO CABLE;BOX,8P,1R,2mm,ANGL	1	S.A	
...3	CN330	3711-004379	HEADER-BOARD TO CABLE;BOX,4P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-004484	HEADER-BOARD TO CABLE;BOX,5P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-004484	HEADER-BOARD TO CABLE;BOX,5P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-004712	HEADER-BOARD TO CABLE;BOX,9P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-005842	HEADER-BOARD TO CABLE;BOX,24P,2R,2MM,STR	1	S.A	
...3	JA330	3722-001055	JACK-PHONE;5P/2C,AG,BLK,ANGLE	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN3214	3722-002275	JACK-DIN;4P,-,SN,BLK,-	1	S.A	
...3	JA3201	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002704	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	CIS3	BN40-00120A	TUNER;TDHG6-K10A,TDHG6-K10A,DVB-T,181CH,	1	S.A	
...3	M0107	BN63-01847A	SHIELD-COVER;ROME,SECC,T0.3,49.5,79.5,HE	1	S.N.A	
...3	HDCP	BN97-00688A	ASSY HDCP;BN46-00018A,PS-42V6S,D73A,GENE	1	S.N.A	
....4		BN46-00018A	KEY CODE-CERTIFICATE;(HDCP KEY)PPM42M5S,	1	S.N.A	
...3	T0174	BN97-02055A	ASSY SMD;LE26A456C1DXXC,AUO	1	S.N.A	
....4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,-,D20~45##,96.5Sn/	2.772	S.N.A	
....4	D2002	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2003	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2004	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2009	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2012	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2019	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D3244	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D1004	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3003	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3004	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3006	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3007	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3009	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3011	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3012	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3013	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3016	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3017	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3019	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3021	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3022	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3023	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3024	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3025	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3026	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3027	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3030_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3031_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3034_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3035_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3036_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3037_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3038_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3039_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3040_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3041_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3045	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3046	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3047	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3064	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3066	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3202	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3203	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3204	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3206	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3217	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3218	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3219	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3230	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3236	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D1002	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D2001	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3063	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3065	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3067	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D0254	0402-001019	DIODE-SCHOTTKY;MBRS340,40V,3000mA,DO-214	1	S.A	
....4	D2008	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3020	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3033_3H	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3048	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3049	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3050	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3051	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3052	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3074	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3070	0403-000258	DIODE-ZENER;BZX84C5V6,5.2-6V,225mW,SOT-2	1	S.A	
....4	D3216	0403-000607	DIODE-ZENER;VLZ16C,15.69/16.51V,500mW,SO	1	S.N.A	
....4	D3229	0403-000607	DIODE-ZENER;VLZ16C,15.69/16.51V,500mW,SO	1	S.N.A	
....4	D3002	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3015	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3029_3H	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3042	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3001	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3014	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3028_3H	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3208	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D5201	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D1005	0403-001425	DIODE-ZENER;BZX84C33,31-35V,350mW,SOT-23	1	S.A	
....4	D0254	0404-001271	DIODE-SCHOTTKY;SSA34,40V,3000mA,SMA,TP	1	S.A	
....4	D3053	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3054	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3055	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3056	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3057	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3058	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3068	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3069	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3212_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3213	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3214_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3215	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3220	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3221	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3222_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3223	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3224	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3225	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3226	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3227_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3228_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3231	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3232	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3233	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3237	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3238	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3239	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3240	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D2013	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D3071	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D3072	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7201	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7202	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7203	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7204	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7205	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7206	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	Q7001	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,	1	S.A	
....4	Q7002	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,	1	S.A	
....4	Q7402	0501-000434	TR-SMALL SIGNAL;KTC3875S-GR,NPN,150mW,SO	1	S.A	
....4	Q1001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2002	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2003	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q2004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3006	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3207	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3208	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5002	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5201	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5202	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q6003_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2005	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q2006	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q3202	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q3205	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q1004_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3201	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3203	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3204	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3206	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001165	FET-SILICON;SI3443BDV,P,-20V,+-4.4A,65mo	1	S.A	
....4	Q409	0505-001170	FET-SILICON;SI9933ADY-T1,P,-20V,3.4A,0.0	1	S.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002432	IC-CMOS LOGIC;74LVC244,8BIT BUFFER/DRIVE	1	S.N.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-003239	IC-CMOS LOGIC;74LVC1G00,2-input NAND Gat	1	S.A	
....4	IC104	0801-003239	IC-CMOS LOGIC;74LVC1G00,2-input NAND Gat	1	S.A	
....4	IC2002	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC5203	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC106	1001-001082	IC-VIDEO SWITCH;BA7657F,-,SOP,24P,300MIL	1	S.A	
....4	IC3011	1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	1	S.A	
....4	IC106	1001-001440	IC-VIDEO SWITCH;SiI9185CTU,QFP,80P,3.3V,	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC110	1006-001076	IC-DRIVER/RECEIVER;MAX232ECWE+T,SOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC112	1103-001410	IC-EEPROM;S-24CS08AFJ-TB-1GE,8Kbit,1Kx8,	1	S.A	
....4	IC113	1105-001712	IC-DRAM;HYB25D256163CE,DDR,256Mbit,16Mx1	1	S.A	
....4	IC5201	1105-001838	IC-DDR SDRAM;EM6A9160TS0A-5G,DDR SDRAM,1	1	S.A	
....4	DU410	1201-000166	IC-OP AMP;LM358,SOP,ST,8P,150MIL,DUAL,10	1	S.A	
....4	DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	1	S.A	
....4	DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	1	S.A	
....4	T0085	1201-002487	IC-AUDIO AMP;MAX9728A,QFN,12P,3x3mm,DUAL	1	S.A	
....4	T0124	1201-002677	IC-POWER AMP;NTP3100,QFN56,56P,8x8mm,DUA	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002974	IC-POSI.FIXED REG.;AP1117D-25A,TO-252,3P	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	T0170	1203-003059	IC-SWITCH VOL. REG.;MP1583,SOIC,8P,4.9x3	1	S.A	
....4	IC7206	1203-003394	IC-POWER SUPERVISOR;MIC2544-1YM,SOP,8P,4	1	S.A	
....4	T0087	1203-003696	IC-POSI.FIXED REG.;NCP1117DT18T5G,DPAK,3	1	S.A	
....4	IC5002	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC2005	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC7402	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	T0087	1203-004816	IC-POSI.FIXED REG.;KIA78D015F,DPAK,3P,6.	1	S.A	
....4	IC118	1204-002779	IC-VIDEO PROCESS;S4LF122X01,PBGA,208P,17	1	S.A	
....4	IC7001	1204-002861	IC-DECODER;UPD61211GM-104-GAA-A,QFP,216P	1	S.A	
....4	IC5204	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC5205	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC5206	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC5207	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC109	1205-003432	IC-LCD CONTROLLER;SEMS01,LQFP,256P,30x30	1	S.A	
....4	IC3012	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	IC3013	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	IC3014_3H	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	R110	2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000137	R-CHIP;2KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000242	R-CHIP;1.5KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000287	R-CHIP;100OHM,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000287	R-CHIP;100OHM,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000539	R-CHIP;200ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001217	R-CHIP;82OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001217	R-CHIP;82OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001285	R-CHIP;5.6OHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6OHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6OHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6OHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001307	R-CHIP;180ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001307	R-CHIP;180ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001317	R-CHIP;910OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001317	R-CHIP;910OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001333	R-CHIP;18KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001333	R-CHIP;18KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007297	R-CHIP;110ohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-007307	R-CHIP;150ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007319	R-CHIP;390OHM,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007791	R-CHIP;9.1KOHM,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007791	R-CHIP;9.1KOHM,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-008429	R-CHIP;499ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-008649	R-CHIP;220ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	RA5009	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5010	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5011	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5012	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5013	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5014	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA6007	2011-000686	R-NETWORK;56ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5021	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5022	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5023	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5201	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5202	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5203	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5204	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA5205	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7203	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7204	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5006	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6004_ FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6005_ FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6006_ FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA5001	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5002	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5003	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5004	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5015	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5024	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5025	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5030	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5031	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5034	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7009	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7010	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7011	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7012	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7209	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7001	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7002	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7003	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7004	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7005	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7006	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7007	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7008	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7205	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7210	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5005	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5007	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5008	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5016	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5017	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5018	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5019	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5020	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5026	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5027	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5028	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5029	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5032	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5033	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7201	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7202	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000357	C-CER,CHIP;0.15nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000975	C-CER,CHIP;47nF,10%,25V,X7R,TP,1608,-	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-005005	C-CER,CHIP;100nF,10%,16V,X7R,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005261	C-CER,CHIP;1000nF,10%,25V,X7R,3216	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005533	C-CER,CHIP;1000nF,20%,6.3V,X7R,TP,1608	1	S.A	
....4	C120	2203-005533	C-CER,CHIP;1000nF,20%,6.3V,X7R,TP,1608	1	S.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,1005	1	S.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006513	C-CER,CHIP;0.047NF,5%,50V,C0G,TP,1005	1	S.N.A	
....4	C120	2203-006513	C-CER,CHIP;0.047NF,5%,50V,C0G,TP,1005	1	S.N.A	
....4	C120	2203-006513	C-CER,CHIP;0.047NF,5%,50V,C0G,TP,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006842	C-CER,CHIP;0.47nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C1015	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
....4	C3056	2402-001150	C-AL,SMD;47UF,20%,16V,-,TP,6.3X5.8MM	1	S.A	
....4	C1025	2402-001238	C-AL,SMD;1uF,20%,50V,HR,TP,4.3x4.3x5.2mm	1	S.A	
....4	C1005	2402-001257	C-AL,SMD;470uF,20%,16V,-,TP,8.3*10	1	S.A	
....4	C1039	2402-001257	C-AL,SMD;470uF,20%,16V,-,TP,8.3*10	1	S.A	
....4	C1010	2402-001259	C-AL,SMD;220uF,20%,16V,WT,REEL,8X10	1	S.A	
....4	C2014	2402-001330	C-AL,SMD;330uF,20%,25V,TP,10x10mm	1	S.N.A	
....4	T0052	2703-000125	INDUCTOR-SMD;10uH,10%,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000417	INDUCTOR-SMD;220uH,5%,3225	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001426	INDUCTOR-SMD;680uH,20%,7070	1	S.A	
....4	T0052	2703-001778	INDUCTOR-SMD;3.3uH,20%,3225	1	S.A	
....4	T0052	2703-002722	INDUCTOR-SMD;22uH,20%,12x12mm	1	S.A	
....4	L2001	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	L2002	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	X202	2801-003667	CRYSTAL-SMD;14.31818MHz,30ppm,28-AAN,16p	1	S.A	
....4	X202	2801-003954	CRYSTAL-SMD;27MHz,30ppm,28-AAN,16pF,50oh	1	S.A	
....4	F103	2901-001114	FILTER-EMI SMD;25VDC,2.0ADC,-,100nF,3.2x	1	S.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001278	BEAD-SMD;120ohm,1608,200mA,TP,169ohm/174	1	S.N.A	
....4	T0568	3301-001278	BEAD-SMD;120ohm,1608,200mA,TP,169ohm/174	1	S.N.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001393	BEAD-SMD;60ohm,3216,1500mA,TP,41ohm/40MH	1	S.N.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	JA3001	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	JA3002	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	CN6001_ FFC	3708-001150	CONNECTOR-FPC/FFC/PIC;30P,1mm,SMD-A,SN,Y	1	S.A	
....4	T0077	BN41-00981A	PCB MAIN;Coral iDTV Reverse,FR-4,4,1.6T,	1	S.N.A	
....4	M0018	BN97-02084A	ASSY MICOM;T-PERLDEUC-0010,N50A,2007.12.	1	S.N.A	
.....5	IC115	1107-001415	IC-FLASH MEMORY;29W320D,4Mx8/2Mx16Bit,TS	1	S.N.A	
....4	M0018	BN97-02084B	ASSY MICOM;T-CRL32PEUMD-0008.0,N50A,2007	1	S.N.A	
.....5	IC115	1107-001709	IC-FLASH MEMORY;MX25L1605A,16Mbit,2Mx8,S	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
...3	T0245	0202-001492	SOLDER-WIRE FLUX;HSE-02 LFM48 SR-34 S,-,	0.25	S.N.A	
0.1		BN91-02051A	ASSY SHIELD-AAN;LE26A456C1DXXC,N50A	1	S.N.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	6	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	4	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	1	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	4	S.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	1	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	6	S.N.A	
..2	M0081	6003-001439	SCREW-TAPTITE;BH,+,-,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BH39-00362B	LEAD CONNECTOR;RE32**,UL1007#26,5P,150mm	1	S.A	
..2	M2893	BN39-00802A	LEAD CONNECTOR;LE32R86BDX,UL1007#26,UL/C	1	S.A	
..2	T0764	BN44-00214A	SMPS-LCDTV;MK32P5B,DYREL,AC/DC,137W,AC10	1	S.A	
..2	M0146	BN61-02207A	BRACKET-PANEL SIDE;Bordeaux 26,SECC,T1.2	2	S.N.A	
..2	M0114	BN61-02500A	HOLDER-WIRE;NYLON6.6,NATURAL	3	S.N.A	
..2	M0115	BN61-02947A	BRACKET-STAND LINK;JASMINE 32",SECC,T1.6	1	S.A	
..2	M0254	BN61-03699A	HOLDER-SIDE AV;32L450,EO,HIPS,V0,-,-,-,B	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
..2	M0107	BN63-03039A	SHIELD-COVER;MURANO40,PCM,T0.5,IDTV	1	S.N.A	
..2	M0125	BN96-05490A	ASSY INLET P;LE52M87BDX,XEC,300,300,150m	1	S.A	
..2	T0447	BN96-06957A	ASSY BRACKET P-PANEL;26A450C,SECC,T1.0,C	1	S.N.A	
...3	M0146	BN61-03682A	BRACKET-PANEL TOP;L450 26INCH,SECC,T1.0	1	S.N.A	
...3		BN61-03687A	BRACKET-PANEL BOTTOM;L450 26INCH,SECC,T1	1	S.N.A	
...3		BN61-03688A	BRACKET-GUIDE MAIN;L450 26INCH,SECC,T1.0	1	S.N.A	
...3		BN61-03690A	BRACKET-GUIDE POWER;L450 26INCH,SECC,T1.	1	S.N.A	
...3		BN61-03694A	BRACKET-GUIDE POWER;L450 26INCH,SECC,T1.	1	S.N.A	
...3	M0131	BN63-03370A	GASKET;LE37M86BDX,Conductive Fabric,10,7	1	S.N.A	
...3	M0131	BN63-03392A	GASKET;BORDEAUX PLUS,Conductive Fabric,1	2	S.N.A	
..2	M0214	BN96-07158D	ASSY CABLE P-FLAT;CORAL,FFC CABLE,196mm,	1	S.A	
..2	M2893	BN39-00603B	LEAD CONNECTOR;RE32**,UL1007#26,14P,200m	1	S.A	
0.1		BN91-02064A	ASSY LCD-AUO;LE26A456C1DXXC	1	S.N.A	
..2	M0215	BN07-00510A	LCD-PANEL;T260XW02 VL	1	S.A	
0.1	M0003	BN92-03167B	ASSY BOX;26L450,EO,,C1	1	S.N.A	
..2		BN69-02285D	BOX-SET;L450-26,CB,DY-01,A,YEL,A1,EUROPE	1	S.N.A	
0.1	M0019	BN92-03280A	ASSY LABEL;LE26A456C1DXXC,N50A	1	S.N.A	
0.1	M0045	BN92-03322A	ASSY ACCESSORY;LE26A456C1XXC	1	S.N.A	
..2	M0045	BN96-07319A	ASSY ACCESSORY-MANUAL;LE26A456C1DXXC	1	S.A	
...3	T0210	AA68-03242K	MANUAL FLYER-01,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	ACCESSORY	AA68-03575A	MANUAL FLYER-02,REGISTRATION C;XEU,ENG,U	1	S.N.A	
...3	ACCESSORY	AA68-03575B	MANUAL FLYER-02,REGISTRATION C;XEG,GERMA	1	S.N.A	
...3	ACCESSORY	AA68-03575C	MANUAL FLYER-02,REGISTRATION C;XEF,FRENC	1	S.N.A	
...3	ACCESSORY	AA68-03575D	MANUAL FLYER-03,REGISTRATION C;XEC,SPANI	1	S.N.A	
...3	ACCESSORY	AA68-03575E	MANUAL FLYER-04,REGISTRATION C;XET,ITALY	1	S.N.A	
...3	ACCESSORY	AA68-03575F	MANUAL FLYER-02,REGISTRATION C;XEN,DUTCH	1	S.N.A	
...3	ACCESSORY	AA68-03575G	MANUAL FLYER-02,REGISTRATION C;XEP,PORTU	1	S.N.A	
...3	ACCESSORY	BN68-00514E	MANUAL FLYER-00,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3	T0511	BN68-01424A	MANUAL USERS;COMM,SAMSUNG,8Langs,W.Europ	1	S.N.A	
...3	T0091	HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	0.05	S.N.A	
..2	M0045	BN96-07319B	ASSY ACCESSORY-CABEL;LE26A456C1DXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.A	
...3	T0074	BN59-00684A	REMOCON;TM-96B,49,EUROPE_DTV-450	1	S.A	
...3	ACCESSORY	BN63-01798A	CLOTH-CLEAN;RE40**,CLOTH,180,200,RHCM	1	S.N.A	
...3	T0531	BN63-04269B	COVER-BOTTOM;22,26,32L450,HIPS,HB,BK500	1	S.N.A	
...3	T0091	HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	0.05	S.N.A	
0.1	M0113	BN92-03173B	ASSY P/MATERIAL;26L450,W/W	1	S.N.A	
..2	T0524	6902-000358	BAG PE;HDPE/NITRON,T0.015/T0.5,W900,L700	1	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	1.81	S.N.A	
....4	C2741_LCD	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	

5-6. LE32A45*C** Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE32A457C1DXXC	LE32A457C1D,N50A/32AC1-GCR,32,LCD-TV,SPA			
0.1	M0001	BN90-01501E	ASSY COVER FRONT;32L450,EO(iDTV)	1	S.N.A	
..2	T0003	BN96-06784E	ASSY COVER P-FRONT;32L456,EO(iDTV),ABS+P	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	1	S.N.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
...3	T0069	AA60-00091N	SPACER-FELT;-,FELT,70X10,-,-,BLK,T1.0,-,	1	S.N.A	
...3		BN61-03675B	HOLDER-BOSS BOTTOM;32L450,EO,HIPS,HB,-,-	1	S.N.A	
...3	CCM1	BN63-02183D	COVER-SHEET;Rhcm,PE Vinyl,T0.05,680mm,20	0.74	S.N.A	
...3	M0112	BN63-04166E	COVER-FRONT;32L456,EO(iDTV),ABS+PMMA,-,-	1	S.N.A	
...3	T0059	BN64-00379A	INDICATOR LED;ROME-II,23,PC,CLEAR	1	S.N.A	
...3	T0061	BN64-00453A	WINDOW-REMOCON;32R71,PC,V0,VIOLET,DIFFUS	1	S.N.A	
...3	T0022	BN64-00755A	KNOB-CONTROL;32L450,ABS,V0,BK07	1	S.N.A	
...3		BN64-00756A	DECORATION-BOTTOM;L450 32INCH,PC,-,-,-,-	1	S.N.A	
...3	M0145	BN96-07269A	ASSY BOARD P-FUNCTION;LN40A450C1D,CT5000	1	S.A	
...3	M0146	BN96-07270D	ASSY BOARD P-POWER & IR;LN32A450C1D,CT50	1	S.A	
...3		BN61-03261B	BOSS-TAPE;Tulip,ACRYL,T1.1,W20mm,GRAY,TA	0.57	S.N.A	
...3	T0069	BP60-00015R	SPACER-FELT;L450,FELT,L710,BLK,T0.35,W10	2	S.N.A	
...3	T0069	BP60-00015S	SPACER-FELT;L450 32",FELT,L410,BLK,T0.35	2	S.N.A	
..2	T0175	BN96-06818C	ASSY SPEAKER P;8ohm,CORAL,L450,10W,550/3	1	S.A	
0.1	M0002	BN90-01577B	ASSY COVER REAR;32L450,EO(iDTV)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	11	S.A	
..2	M0013	BN96-07208B	ASSY COVER P-REAR;32L450,EO(iDTV),HIPS,H	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	4	S.N.A	
...3	T0101	BN61-03348A	BRACKET-WALL;LCD TV 32,SECC T1.2,-,-,-,-	4	S.N.A	
...3	M0006	BN63-04245B	COVER-REAR;32L450,EO(iDTV),HIPS,HB,BK500	1	S.N.A	
...3	T0071	BN64-00758A	INLAY-TERMINAL;26,32,37L450,PS SHEET,T0.	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
0.1	M0216	BN90-01580A	ASSY STAND;32L450,W/W	1	S.N.A	
..2	T0524	6902-000241	BAG PE;NITRON/HDPE,T0.5/T0.012,W600,L600	1	S.N.A	
..2	M0027	BN96-07211A	ASSY STAND P-BASE;32L450,W/W,ABS+PMMA,HB	1	S.A	
...3	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.A	
...3	M0081	6003-001239	SCREW-TAPTITE;FH,+,-,B,M4,L10,ZPC(WHT),S	4	S.A	
...3		BN61-02232A	HOLDER-SWIVEL RING;32R71,ACETAL NATUAL,T	1	S.N.A	
...3		BN61-02233A	HOLDER-SWIVEL RING;32R71,ACETAL NATUAL,B	1	S.N.A	
...3		BN61-02236A	BRACKET-HINGE SWIVEL;BORDEAUX 32,SECC,T1	1	S.N.A	
...3		BN61-02942A	BRACKET-STAND BOTTOM;32,BORDEAUX PLUS,SE	1	S.N.A	
...3	T0920	BN61-03679A	GUIDE-STAND;32L450,PC+GF 20%,-,-,-,BK500	1	S.N.A	
...3	CCM1	BN63-02183D	COVER-SHEET;Rhcm,PE Vinyl,T0.05,680mm,20	0.4	S.N.A	
...3	T0004	BN63-03102A	COVER-STAND BASE;32R81,ABS+PMMA,-,-,-,HB	1	S.N.A	
...3	T0132	BN73-00052A	RUBBER FOOT;ARES 17,CR Rubber Gray,T1.5	4	S.N.A	
0.1	M0017	BN91-02045B	ASSY CHASSIS;LE32A456C1DXXC,N50A	1	S.N.A	
..2	M0014	BN94-01672B	ASSY PCB MAIN-AUO;LE32A456C1DXXC,N50A	1	S.A	
...3		0202-001557	SOLDER-CREAM;LST57-A,D38-63,42SN/57BI/1A	11	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	JA3003_3H	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	JA3004	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	JA7201_OP	3709-001508	CONNECTOR-CARD SLOT;68P,1.27mm,PIN,PCMCI	1	S.A	
...3	CN330	3711-000012	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5MM,ST	1	S.A	
...3	CN330	3711-003846	HEADER-BOARD TO CABLE;BOX,8P,1R,2mm,ANGL	1	S.A	
...3	CN330	3711-004379	HEADER-BOARD TO CABLE;BOX,4P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-004484	HEADER-BOARD TO CABLE;BOX,5P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-004484	HEADER-BOARD TO CABLE;BOX,5P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-004712	HEADER-BOARD TO CABLE;BOX,9P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-005842	HEADER-BOARD TO CABLE;BOX,24P,2R,2MM,STR	1	S.A	
...3	JA330	3722-001055	JACK-PHONE;5P/2C,AG,BLK,ANGLE	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN3214	3722-002275	JACK-DIN;4P,-,SN,BLK,-	1	S.A	
...3	JA3201	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002704	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	CIS3	BN40-00120A	TUNER;TDHG6-K10A,TDHG6-K10A,DVB-T,181CH,	1	S.A	
...3	M0107	BN63-01847A	SHIELD-COVER;ROME,SECC,T0.3,49.5,79.5,HE	1	S.N.A	
...3	HDCP	BN97-00688A	ASSY HDCP;BN46-00018A,PS-42V6S,D73A,GENE	1	S.N.A	
....4		BN46-00018A	KEY CODE-CERTIFICATE;(HDCP KEY)PPM42M5S,	1	S.N.A	
...3	T0174	BN97-02055B	ASSY SMD;LE32A456C1DXXC,AUO	1	S.N.A	
....4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,-,D20~45##,96.5Sn/	2.772	S.N.A	
....4	D2002	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2003	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2004	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2009	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2012	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2019	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D3244	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D1004	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3003	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3004	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3006	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3007	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3009	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3011	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3012	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3013	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3016	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3017	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3019	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3021	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3022	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3023	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3024	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3025	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3026	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3027	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3030_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3031_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3034_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3035_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3036_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3037_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3038_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3039_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3040_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3041_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3045	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3046	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3047	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3064	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3066	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3202	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3203	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3204	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3206	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3217	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3218	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3219	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3230	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3236	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D1002	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D2001	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3063	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3065	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3067	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D0254	0402-001019	DIODE-SCHOTTKY;MBRS340,40V,3000mA,DO-214	1	S.A	
....4	D2008	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3020	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3033_3H	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3048	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3049	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3050	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3051	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3052	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3074	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3070	0403-000258	DIODE-ZENER;BZX84C5V6,5.2-6V,225mW,SOT-2	1	S.A	
....4	D3216	0403-000607	DIODE-ZENER;VLZ16C,15.69/16.51V,500mW,SO	1	S.N.A	
....4	D3229	0403-000607	DIODE-ZENER;VLZ16C,15.69/16.51V,500mW,SO	1	S.N.A	
....4	D3002	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3015	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3029_3H	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3042	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3001	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3014	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3028_3H	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3208	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D5201	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D1005	0403-001425	DIODE-ZENER;BZX84C33,31-35V,350mW,SOT-23	1	S.A	
....4	D0254	0404-001271	DIODE-SCHOTTKY;SSA34,40V,3000mA,SMA,TP	1	S.A	
....4	D3053	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3054	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3055	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3056	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3057	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3058	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3068	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3069	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3212_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3213	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3214_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3215	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3220	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3221	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3222_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3223	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3224	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3225	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3226	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3227_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3228_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3231	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3232	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3233	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3237	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3238	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3239	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3240	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D2013	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D3071	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D3072	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7201	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7202	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7203	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7204	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7205	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7206	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	Q7001	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,	1	S.A	
....4	Q7002	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,	1	S.A	
....4	Q7402	0501-000434	TR-SMALL SIGNAL;KTC3875S-GR,NPN,150mW,SO	1	S.A	
....4	Q1001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q2001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2002	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2003	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3006	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3207	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3208	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5002	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5201	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5202	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q6003_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2005	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q2006	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q3202	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q3205	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q1004_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3201	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3203	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3204	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3206	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001165	FET-SILICON;SI3443BDV,P,-20V,+-4.4A,65mo	1	S.A	
....4	Q409	0505-001170	FET-SILICON;SI9933ADY-T1,P,-20V,3.4A,0.0	1	S.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002432	IC-CMOS LOGIC;74LVC244,8BIT BUFFER/DRIVE	1	S.N.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-003239	IC-CMOS LOGIC;74LVC1G00,2-input NAND Gat	1	S.A	
....4	IC104	0801-003239	IC-CMOS LOGIC;74LVC1G00,2-input NAND Gat	1	S.A	
....4	IC2002	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC5203	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC106	1001-001082	IC-VIDEO SWITCH;BA7657F,-,SOP,24P,300MIL	1	S.A	
....4	IC3011	1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	1	S.A	
....4	IC106	1001-001440	IC-VIDEO SWITCH;SiI9185CTU,QFP,80P,3.3V,	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC110	1006-001076	IC-DRIVER/RECEIVER;MAX232ECWE+T,SOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC112	1103-001410	IC-EEPROM;S-24CS08AFJ-TB-1GE,8Kbit,1Kx8,	1	S.A	
....4	IC113	1105-001712	IC-DRAM;HYB25D256163CE,DDR,256Mbit,16Mx1	1	S.A	
....4	IC5201	1105-001838	IC-DDR SDRAM;EM6A9160TS0A-5G,DDR SDRAM,1	1	S.A	
....4	DU410	1201-000166	IC-OP AMP;LM358,SOP,ST,8P,150MIL,DUAL,10	1	S.A	
....4	DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	1	S.A	
....4	DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	1	S.A	
....4	T0085	1201-002487	IC-AUDIO AMP;MAX9728A,QFN,12P,3x3mm,DUAL	1	S.A	
....4	T0124	1201-002677	IC-POWER AMP;NTP3100,QFN56,56P,8x8mm,DUA	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002974	IC-POSI.FIXED REG.;AP1117D-25A,TO-252,3P	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	T0170	1203-003059	IC-SWITCH VOL. REG.;MP1583,SOIC,8P,4.9x3	1	S.A	
....4	IC7206	1203-003394	IC-POWER SUPERVISOR;MIC2544-1YM,SOP,8P,4	1	S.A	
....4	T0087	1203-003696	IC-POSI.FIXED REG.;NCP1117DT18T5G,DPAK,3	1	S.A	
....4	IC5002	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC2005	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC7402	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	T0087	1203-004816	IC-POSI.FIXED REG.;KIA78D015F,DPAK,3P,6.	1	S.A	
....4	IC118	1204-002779	IC-VIDEO PROCESS;S4LF122X01,PBGA,208P,17	1	S.A	
....4	IC7001	1204-002861	IC-DECODER;UPD61211GM-104-GAA-A,QFP,216P	1	S.A	
....4	IC5204	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC5205	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC5206	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC5207	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC109	1205-003432	IC-LCD CONTROLLER;SEMS01,LQFP,256P,30x30	1	S.A	
....4	IC3012	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	IC3013	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	IC3014_3H	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	R110	2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000137	R-CHIP;2KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000242	R-CHIP;1.5KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000287	R-CHIP;100OHM,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000287	R-CHIP;100OHM,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000539	R-CHIP;200ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001217	R-CHIP;82OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001217	R-CHIP;82OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001285	R-CHIP;5.6OHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6OHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6OHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6OHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001307	R-CHIP;180ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001307	R-CHIP;180ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001317	R-CHIP;910OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001317	R-CHIP;910OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001333	R-CHIP;18KOHM,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-001333	R-CHIP;18KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007297	R-CHIP;110ohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-007307	R-CHIP;150ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007319	R-CHIP;390OHM,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007791	R-CHIP;9.1KOHM,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007791	R-CHIP;9.1KOHM,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-008429	R-CHIP;499ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-008649	R-CHIP;220ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	RA5009	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5010	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5011	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5012	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5013	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5014	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA6007	2011-000686	R-NETWORK;56ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5021	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5022	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5023	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5201	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA5202	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5203	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5204	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5205	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7203	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7204	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5006	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6004_ FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6005_ FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6006_ FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA5001	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5002	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5003	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5004	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5015	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5024	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5025	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5030	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5031	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5034	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7009	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7010	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7011	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7012	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7209	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7001	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7002	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7003	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7004	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7005	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7006	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7007	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7008	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7205	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7210	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5005	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5007	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5008	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5016	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5017	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5018	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5019	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5020	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5026	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5027	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5028	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5029	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5032	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA5033	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7201	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7202	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000357	C-CER,CHIP;0.15nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000975	C-CER,CHIP;47nF,10%,25V,X7R,TP,1608,-	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-005005	C-CER,CHIP;100nF,10%,16V,X7R,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005261	C-CER,CHIP;1000nF,10%,25V,X7R,3216	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005533	C-CER,CHIP;1000nF,20%,6.3V,X7R,TP,1608	1	S.A	
....4	C120	2203-005533	C-CER,CHIP;1000nF,20%,6.3V,X7R,TP,1608	1	S.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,1005	1	S.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006842	C-CER,CHIP;0.47nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C1015	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
....4	C3056	2402-001150	C-AL,SMD;47UF,20%,16V,-,TP,6.3X5.8MM	1	S.A	
....4	C1025	2402-001238	C-AL,SMD;1uF,20%,50V,HR,TP,4.3x4.3x5.2mm	1	S.A	
....4	C1005	2402-001257	C-AL,SMD;470uF,20%,16V,-,TP,8.3*10	1	S.A	
....4	C1039	2402-001257	C-AL,SMD;470uF,20%,16V,-,TP,8.3*10	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C1010	2402-001259	C-AL,SMD;220uF,20%,16V,WT,REEL,8X10	1	S.A	
....4	C2014	2402-001330	C-AL,SMD;330uF,20%,25V,TP,10x10mm	1	S.N.A	
....4	T0052	2703-000125	INDUCTOR-SMD;10uH,10%,2012	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000417	INDUCTOR-SMD;220uH,5%,3225	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001426	INDUCTOR-SMD;680uH,20%,7070	1	S.A	
....4	T0052	2703-001778	INDUCTOR-SMD;3.3uH,20%,3225	1	S.A	
....4	T0052	2703-002722	INDUCTOR-SMD;22uH,20%,12x12mm	1	S.A	
....4	L2001	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	L2002	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	X202	2801-003667	CRYSTAL-SMD;14.31818MHz,30ppm,28-AAN,16p	1	S.A	
....4	X202	2801-003954	CRYSTAL-SMD;27MHz,30ppm,28-AAN,16pF,50oh	1	S.A	
....4	F103	2901-001114	FILTER-EMI SMD;25VDC,2.0ADC,-,100nF,3.2x	1	S.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001278	BEAD-SMD;120ohm,1608,200mA,TP,169ohm/174	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	T0568	3301-001278	BEAD-SMD;120ohm,1608,200mA,TP,169ohm/174	1	S.N.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001393	BEAD-SMD;60ohm,3216,1500mA,TP,41ohm/40MH	1	S.N.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	JA3001	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	JA3002	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	CN6001_ FFC	3708-001150	CONNECTOR-FPC/FFC/PIC;30P,1mm,SMD-A,SN,Y	1	S.A	
....4	T0077	BN41-00981A	PCB MAIN;Coral iDTV Reverse,FR-4,4,1.6T,	1	S.N.A	
....4	M0018	BN97-02084A	ASSY MICOM;T-PERLDEUC-0010,N50A,2007.12.	1	S.N.A	
.....5	IC115	1107-001415	IC-FLASH MEMORY;29W320D,4Mx8/2Mx16Bit,TS	1	S.N.A	
....4	M0018	BN97-02084B	ASSY MICOM;T-CRL32PEUMD-0008.0,N50A,2007	1	S.N.A	
.....5	IC115	1107-001709	IC-FLASH MEMORY;MX25L1605A,16Mbit,2Mx8,S	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
...3	T0245	0202-001492	SOLDER-WIRE FLUX;HSE-02 LFM48 SR-34 S,-,	0.25	S.N.A	
0.1		BN91-02052A	ASSY SHIELD-AAD;LE32A456C1DXXC,N50A	1	S.N.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	6	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	4	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	1	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	4	S.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	1	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	8	S.N.A	
..2	M0081	6003-001439	SCREW-TAPTITE;BH,+,-,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BH39-00362B	LEAD CONNECTOR;RE32**,UL1007#26,5P,150mm	1	S.A	
..2	M2893	BN39-00603A	LEAD CONNECTOR;RE40**,UL1007#26,UL,14P,2	1	S.A	
..2	M0258	BN39-00615Q	CBF HARNESS-INLET SOCKET;LN40A450C1D,UL1	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
..2	T0764	BN44-00221A	SMPS-LCDTV;MK32P5B,DELTA,AC/DC,137W,AC10	1	S.A	
..2	M0114	BN61-02500A	HOLDER-WIRE;NYLON6.6,NATURAL	4	S.N.A	
..2	M0115	BN61-02947A	BRACKET-STAND LINK;JASMINE 32",SECC,T1.6	1	S.A	
..2	M0146	BN61-03265A	BRACKET-PANEL SIDE;JASMINE,SECC 1.2,AMLC	2	S.N.A	
..2	M0254	BN61-03699A	HOLDER-SIDE AV;32L450,EO,HIPS,V0,-,-,-,B	1	S.N.A	
..2	M0107	BN63-03039A	SHIELD-COVER;MURANO40,PCM,T0.5,IDTV	1	S.N.A	
..2	T0447	BN96-06958B	ASSY BRACKET P-PANEL;32A450C,SECC,T1.0,C	1	S.N.A	
...3	M0131	AA63-01438A	GASKET;Bordeaux,Conductive Fabric,7mm,8m	1	S.N.A	
...3	M0146	BN61-03678B	BRACKET-PANEL TOP;L450 32INCH,SECC,T1.2,	1	S.N.A	
...3		BN61-03683A	BRACKET-GUIDE MAIN;L450 32INCH,SECC,T1.0	1	S.N.A	
...3		BN61-03685B	BRACKET-PANEL BOTTOM;L450 32INCH,SECC,T1	1	S.N.A	
...3		BN61-03686A	BRACKET-GUIDE POWER;L450 32INCH,SECC,T1.	1	S.N.A	
...3		BN61-03691A	BRACKET-GUIDE POWER;L450 32INCH,SECC,T1.	1	S.N.A	
...3	M0150	BN96-03504A	ASSY BRACKET P-SUPPORT FILTER;-,DP,BN96-	2	S.N.A	
..2	M0214	BN96-07158A	ASSY CABLE P-FLAT;CORAL,FFC CABLE,225mm,	1	S.A	
..2	M2893	BN39-00802B	LEAD CONNECTOR;LE40R86BDX,UL1007#26,24PI	1	S.A	
0.1		BN91-02064B	ASSY LCD-AUO;LE32A456C1DXXC	1	S.N.A	
..2	M0215	BN07-00511A	LCD-PANEL;T315XW02 VL	1	S.A	
0.1	M0003	BN92-03168B	ASSY BOX;32L450,EO	1	S.N.A	
..2		BN69-02264E	BOX-SET;L450-32,CB,DY-01,AB,YEL,A1,EUROP	1	S.N.A	
0.1	M0113	BN92-03174B	ASSY P/MATERIAL;32L450,W/W	1	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	2.1	S.N.A	
..2	T0524	6902-000738	BAG PE;HDPE/HDPE/NITRON (DOUBLE),T0.015/	1	S.N.A	
0.1	M0019	BN92-03280B	ASSY LABEL;LE32A456C1DXXC,N50A	1	S.N.A	
0.1	M0045	BN92-03322B	ASSY ACCESSORY;LE32A456C1DXXC	1	S.N.A	
..2	M0045	BN96-07319A	ASSY ACCESSORY-MANUAL;LE26A456C1DXXC	1	S.A	
...3	T0210	AA68-03242K	MANUAL FLYER-01,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	ACCESSORY	AA68-03575A	MANUAL FLYER-02,REGISTRATION C;XEU,ENG,U	1	S.N.A	
...3	ACCESSORY	AA68-03575B	MANUAL FLYER-02,REGISTRATION C;XEG,GERMA	1	S.N.A	
...3	ACCESSORY	AA68-03575C	MANUAL FLYER-02,REGISTRATION C;XEF,FRENC	1	S.N.A	
...3	ACCESSORY	AA68-03575D	MANUAL FLYER-03,REGISTRATION C;XEC,SPANI	1	S.N.A	
...3	ACCESSORY	AA68-03575E	MANUAL FLYER-04,REGISTRATION C;XET,ITALY	1	S.N.A	
...3	ACCESSORY	AA68-03575F	MANUAL FLYER-02,REGISTRATION C;XEN,DUTCH	1	S.N.A	
...3	ACCESSORY	AA68-03575G	MANUAL FLYER-02,REGISTRATION C;XEP,PORTU	1	S.N.A	
...3	ACCESSORY	BN68-00514E	MANUAL FLYER-00,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3	T0511	BN68-01424A	MANUAL USERS;COMM,SAMSUNG,8Langs,W.Europ	1	S.N.A	
...3	T0091	HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	0.05	S.N.A	
..2	M0045	BN96-07319C	ASSY ACCESSORY-CABEL;LE32A456C1DXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.A	
...3	T0074	BN59-00684A	REMOCON;TM-96B,49,EUROPE_DTV-450	1	S.A	
...3		BN63-01798A	CLOTH-CLEAN;RE40**,CLOTH,180,200,RHCM	1	S.N.A	
...3	T0531	BN63-04269B	COVER-BOTTOM;22,26,32L450,HIPS,HB,BK500	1	S.N.A	
...3	T0091	HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	0.05	S.N.A	

5-7. LE37A45*C** Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE37A457C1DXXC	LE37A457C1D,N50A/37AC1-GCR,37,LCD-TV,SPA			
0.1	M0001	BN90-01502D	ASSY COVER FRONT;37L450,EO(iDTV)	1	S.N.A	
..2	T0003	BN96-06785D	ASSY COVER P-FRONT;37L450,EO(iDTV),ABS+P	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	1	S.N.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
...3	T0069	AA60-00091N	SPACER-FELT;-,FELT,70X10,-,-,BLK,T1.0,-	1	S.N.A	
...3		BN61-03677B	HOLDER-BOSS BOTTOM;37,40L450,EO,HIPS,HB,	1	S.N.A	
...3	CCM1	BN63-02183D	COVER-SHEET;Rhcm,PE Vinyl,T0.05,680mm,20	0.992	S.N.A	
...3	M0112	BN63-04169D	COVER-FRONT;37L450,EO(iDTV),ABS+PMMA,-,-	1	S.N.A	
...3	T0059	BN64-00379A	INDICATOR LED;ROME-II,23,PC,CLEAR	1	S.N.A	
...3	T0061	BN64-00453A	WINDOW-REMOCON;32R71,PC,V0,VIOLET,DIFFUS	1	S.N.A	
...3	T0022	BN64-00755A	KNOB-CONTROL;32L450,ABS,V0,BK07	1	S.N.A	
...3		BN64-00761A	DECORATION-BOTTOM;L450 37INCH,PC,-,-,-,-	1	S.N.A	
...3	M0145	BN96-07269A	ASSY BOARD P-FUNCTION;LN40A450C1D,CT5000	1	S.A	
...3	M0146	BN96-07270D	ASSY BOARD P-POWER & IR;LN32A450C1D,CT50	1	S.A	
...3		BN61-03261B	BOSS-TAPE;Tulip,ACRYL,T1.1,W20mm,GRAY,TA	0.74	S.N.A	
...3	T0069	BP60-00015T	SPACER-FELT;L450 37",FELT,L830,BLK,T0.5,	2	S.N.A	
...3	T0069	BP60-00015U	SPACER-FELT;L450 37",FELT,L470,BLK,T0.5,	2	S.N.A	
..2	T0175	BN96-06818C	ASSY SPEAKER P;8ohm,CORAL,L450,10W,550/3	1	S.A	
0.1	M0216	BN90-01575A	ASSY STAND;37L450,W/W	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.A	
..2	M0027	BN96-06259A	ASSY STAND P-BASE;37,40L450,,ABS+PMMA,HB	1	S.A	
...3	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.A	
...3	M0081	6003-001239	SCREW-TAPTITE;FH,+,-,B,M4,L10,ZPC(WHT),S	8	S.A	
...3		BN61-02248A	HOLDER-SWIVEL RING;40R71,ACETAL NATUAL,T	1	S.N.A	
...3		BN61-02883A	BRACKET-STAND BOTTOM;BORDEAUX PLUS,40,SE	1	S.N.A	
...3		BN61-02885A	HOLDER-SWIVEL RING;MURANO40,ACETAL NATUR	1	S.N.A	
...3		BN61-02886A	BRACKET-HINGE SWIVEL;BORDEAUX PLUS,40,SE	1	S.N.A	
...3	T0920	BN61-03681A	GUIDE-STAND;40L450,PC+GF 20%,-,-,-,BK500	1	S.N.A	
...3	CCM1	BN63-02183D	COVER-SHEET;Rhcm,PE Vinyl,T0.05,680mm,20	0.5	S.N.A	
...3	T0004	BN63-03030A	COVER-STAND BASE;40R81,ABS+PMMA,-,-,-,HB	1	S.N.A	
...3	T0132	BN73-00052A	RUBBER FOOT;ARES 17,CR Rubber Gray,T1.5	8	S.N.A	
0.1	M0002	BN90-01576B	ASSY COVER REAR;37L450,EO(iDTV)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	14	S.A	
..2	M0013	BN96-07207B	ASSY COVER P-REAR;37L450,EO(iDTV),HIPS,H	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
...3	T0101	BN61-03348A	BRACKET-WALL;LCD TV 32,SECC T1.2,-,-,-,-	2	S.N.A	
...3	M0006	BN63-04246B	COVER-REAR;37L450,EO(iDTV),HIPS,HB,BK500	1	S.N.A	
...3	T0071	BN64-00758A	INLAY-TERMINAL;26,32,37L450,PS SHEET,T0.	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
0.1	M0017	BN91-02045C	ASSY CHASSIS;LE37A456C1DXXC,N50A	1	S.N.A	
..2	M0014	BN94-01672C	ASSY PCB MAIN-AUO;LE37A456C1DXXC,N50A	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3		0202-001557	SOLDER-CREAM;LST57-A,D38-63,42SN/57BI/1A	11	S.N.A	
...3	JA3003_3H	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	JA3004	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	JA7201_OP	3709-001508	CONNECTOR-CARD SLOT;68P,1.27mm,PIN,PCMCI	1	S.A	
...3	CN330	3711-000012	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5MM,ST	1	S.A	
...3	CN330	3711-003846	HEADER-BOARD TO CABLE;BOX,8P,1R,2mm,ANGL	1	S.A	
...3	CN330	3711-004379	HEADER-BOARD TO CABLE;BOX,4P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-004484	HEADER-BOARD TO CABLE;BOX,5P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-004484	HEADER-BOARD TO CABLE;BOX,5P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-004712	HEADER-BOARD TO CABLE;BOX,9P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-005842	HEADER-BOARD TO CABLE;BOX,24P,2R,2MM,STR	1	S.A	
...3	JA330	3722-001055	JACK-PHONE;5P/2C,AG,BLK,ANGLE	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN3214	3722-002275	JACK-DIN;4P,-,SN,BLK,-	1	S.A	
...3	JA3201	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002704	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	CIS3	BN40-00120A	TUNER;TDHG6-K10A,TDHG6-K10A,DVB-T,181CH,	1	S.A	
...3	M0107	BN63-01847A	SHIELD-COVER;ROME,SECC,T0.3,49.5,79.5,HE	1	S.N.A	
...3	HDCP	BN97-00688A	ASSY HDCP;BN46-00018A,PS-42V6S,D73A,GENE	1	S.N.A	
....4		BN46-00018A	KEY CODE-CERTIFICATE;(HDCP KEY)PPM42M5S,	1	S.N.A	
...3	T0174	BN97-02055C	ASSY SMD;LE37A456C1DXXC,AUO	1	S.N.A	
....4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,-,D20~45##,96.5Sn/	2.772	S.N.A	
....4	D2002	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2003	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2004	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2009	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2012	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2019	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D3244	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D1004	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3003	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3004	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3006	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3007	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3009	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3011	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3012	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3013	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3016	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3017	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3019	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3021	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3022	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3023	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3024	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3025	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3026	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3027	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3030_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3031_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3034_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3035_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3036_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3037_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3038_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3039_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3040_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3041_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3045	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3046	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3047	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3064	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3066	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3202	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3203	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3204	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3206	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3217	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3218	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3219	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3230	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3236	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D1002	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D2001	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3063	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3065	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3067	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D0254	0402-001019	DIODE-SCHOTTKY;MBRS340,40V,3000mA,DO-214	1	S.A	
....4	D2008	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3020	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3033_3H	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3048	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3049	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3050	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3051	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3052	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3074	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3070	0403-000258	DIODE-ZENER;BZX84C5V6,5.2-6V,225mW,SOT-2	1	S.A	
....4	D3216	0403-000607	DIODE-ZENER;VLZ16C,15.69/16.51V,500mW,SO	1	S.N.A	
....4	D3229	0403-000607	DIODE-ZENER;VLZ16C,15.69/16.51V,500mW,SO	1	S.N.A	
....4	D3002	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3015	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3029_3H	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3042	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3001	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3014	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3028_3H	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3208	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D5201	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D1005	0403-001425	DIODE-ZENER;BZX84C33,31-35V,350mW,SOT-23	1	S.A	
....4	D0254	0404-001271	DIODE-SCHOTTKY;SSA34,40V,3000mA,SMA,TP	1	S.A	
....4	D3053	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3054	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3055	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3056	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3057	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3058	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3068	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3069	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3212_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3213	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3214_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3215	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3220	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3221	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3222_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3223	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3224	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3225	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3226	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3227_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3228_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3231	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3232	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3233	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3237	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3238	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3239	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3240	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D2013	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D3071	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D3072	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7201	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7202	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7203	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7204	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7205	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7206	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	Q7001	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,	1	S.A	
....4	Q7002	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,	1	S.A	
....4	Q7402	0501-000434	TR-SMALL SIGNAL;KTC3875S-GR,NPN,150mW,SO	1	S.A	
....4	Q1001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2002	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2003	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3006	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3207	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3208	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5002	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5201	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5202	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q6003_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2005	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q2006	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q3202	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q3205	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q1004_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3201	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3203	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3204	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3206	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001165	FET-SILICON;SI3443BDV,P,-20V,+-4.4A,65mo	1	S.A	
....4	Q409	0505-001170	FET-SILICON;SI9933ADY-T1,P,-20V,3.4A,0.0	1	S.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002432	IC-CMOS LOGIC;74LVC244,8BIT BUFFER/DRIVE	1	S.N.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-003239	IC-CMOS LOGIC;74LVC1G00,2-input NAND Gat	1	S.A	
....4	IC104	0801-003239	IC-CMOS LOGIC;74LVC1G00,2-input NAND Gat	1	S.A	
....4	IC2002	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC5203	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC106	1001-001082	IC-VIDEO SWITCH;BA7657F,-,SOP,24P,300MIL	1	S.A	
....4	IC3011	1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	1	S.A	
....4	IC106	1001-001440	IC-VIDEO SWITCH;SiI9185CTU,QFP,80P,3.3V,	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC110	1006-001076	IC-DRIVER/RECEIVER;MAX232ECWE+T,SOP,16P,	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC112	1103-001410	IC-EEPROM;S-24CS08AFJ-TB-1GE,8Kbit,1Kx8,	1	S.A	
....4	IC113	1105-001712	IC-DRAM;HYB25D256163CE,DDR,256Mbit,16Mx1	1	S.A	
....4	IC5201	1105-001838	IC-DDR SDRAM;EM6A9160TS0A-5G,DDR SDRAM,1	1	S.A	
....4	DU410	1201-000166	IC-OP AMP;LM358,SOP,ST,8P,150MIL,DUAL,10	1	S.A	
....4	DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	1	S.A	
....4	DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	1	S.A	
....4	T0085	1201-002487	IC-AUDIO AMP;MAX9728A,QFN,12P,3x3mm,DUAL	1	S.A	
....4	T0124	1201-002677	IC-POWER AMP;NTP3100,QFN56,56P,8x8mm,DUA	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002974	IC-POSI.FIXED REG.;AP1117D-25A,TO-252,3P	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	T0170	1203-003059	IC-SWITCH VOL. REG.;MP1583,SOIC,8P,4.9x3	1	S.A	
....4	IC7206	1203-003394	IC-POWER SUPERVISOR;MIC2544-1YM,SOP,8P,4	1	S.A	
....4	T0087	1203-003696	IC-POSI.FIXED REG.;NCP1117DT18T5G,DPAK,3	1	S.A	
....4	IC5002	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC2005	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC7402	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	T0087	1203-004816	IC-POSI.FIXED REG.;KIA78D015F,DPAK,3P,6.	1	S.A	
....4	IC118	1204-002779	IC-VIDEO PROCESS;S4LF122X01,PBGA,208P,17	1	S.A	
....4	IC7001	1204-002861	IC-DECODER;UPD61211GM-104-GAA-A,QFP,216P	1	S.A	
....4	IC5204	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC5205	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC5206	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC5207	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC109	1205-003432	IC-LCD CONTROLLER;SEMS01,LQFP,256P,30x30	1	S.A	
....4	IC3012	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	IC3013	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	IC3014_3H	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	R110	2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000137	R-CHIP;2KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000242	R-CHIP;1.5KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000287	R-CHIP;100OHM,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000287	R-CHIP;100OHM,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000539	R-CHIP;200ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001217	R-CHIP;82OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001217	R-CHIP;82OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001285	R-CHIP;5.6OHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6OHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6OHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6OHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001307	R-CHIP;180ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001307	R-CHIP;180ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001317	R-CHIP;910OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001317	R-CHIP;910OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-001333	R-CHIP;18KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001333	R-CHIP;18KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007297	R-CHIP;110ohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-007307	R-CHIP;150ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007319	R-CHIP;390OHM,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007791	R-CHIP;9.1KOHM,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007791	R-CHIP;9.1KOHM,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-008429	R-CHIP;499ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-008649	R-CHIP;220ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	RA5009	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5010	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5011	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5012	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5013	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5014	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA6007	2011-000686	R-NETWORK;56ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5021	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5022	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5023	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA5201	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5202	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5203	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5204	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5205	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7203	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7204	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5006	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6004_ FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6005_ FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6006_ FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA5001	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5002	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5003	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5004	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5015	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5024	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5025	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5030	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5031	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5034	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7009	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7010	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7011	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7012	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7209	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7001	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7002	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7003	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7004	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7005	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7006	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7007	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7008	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7205	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7210	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5005	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5007	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5008	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5016	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5017	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5018	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5019	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5020	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5026	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5027	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5028	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5029	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA5032	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5033	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7201	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7202	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000357	C-CER,CHIP;0.15nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000975	C-CER,CHIP;47nF,10%,25V,X7R,TP,1608,-	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-005005	C-CER,CHIP;100nF,10%,16V,X7R,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005261	C-CER,CHIP;1000nF,10%,25V,X7R,3216	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005533	C-CER,CHIP;1000nF,20%,6.3V,X7R,TP,1608	1	S.A	
....4	C120	2203-005533	C-CER,CHIP;1000nF,20%,6.3V,X7R,TP,1608	1	S.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,1005	1	S.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006842	C-CER,CHIP;0.47nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C1015	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
....4	C3056	2402-001150	C-AL,SMD;47UF,20%,16V,-,TP,6.3X5.8MM	1	S.A	
....4	C1025	2402-001238	C-AL,SMD;1uF,20%,50V,HR,TP,4.3x4.3x5.2mm	1	S.A	
....4	C1005	2402-001257	C-AL,SMD;470uF,20%,16V,-,TP,8.3*10	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C1039	2402-001257	C-AL,SMD;470uF,20%,16V,-,TP,8.3*10	1	S.A	
....4	C1010	2402-001259	C-AL,SMD;220uF,20%,16V,WT,REEL,8X10	1	S.A	
....4	C2014	2402-001330	C-AL,SMD;330uF,20%,25V,TP,10x10mm	1	S.N.A	
....4	T0052	2703-000125	INDUCTOR-SMD;10uH,10%,2012	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000417	INDUCTOR-SMD;220uH,5%,3225	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001426	INDUCTOR-SMD;680uH,20%,7070	1	S.A	
....4	T0052	2703-001778	INDUCTOR-SMD;3.3uH,20%,3225	1	S.A	
....4	T0052	2703-002722	INDUCTOR-SMD;22uH,20%,12x12mm	1	S.A	
....4	L2001	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	L2002	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	X202	2801-003667	CRYSTAL-SMD;14.31818MHz,30ppm,28-AAN,16p	1	S.A	
....4	X202	2801-003954	CRYSTAL-SMD;27MHz,30ppm,28-AAN,16pF,50oh	1	S.A	
....4	F103	2901-001114	FILTER-EMI SMD;25VDC,2.0ADC,-,100nF,3.2x	1	S.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	T0568	3301-001278	BEAD-SMD;120ohm,1608,200mA,TP,169ohm/174	1	S.N.A	
....4	T0568	3301-001278	BEAD-SMD;120ohm,1608,200mA,TP,169ohm/174	1	S.N.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001393	BEAD-SMD;60ohm,3216,1500mA,TP,41ohm/40MH	1	S.N.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	JA3001	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	JA3002	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	CN6001_ FFC	3708-001150	CONNECTOR-FPC/FFC/PIC;30P,1mm,SMD-A,SN,Y	1	S.A	
....4	T0077	BN41-00981A	PCB MAIN;Coral iDTV Reverse,FR-4,4,1.6T,	1	S.N.A	
....4	M0018	BN97-02084A	ASSY MICOM;T-PERLDEUC-0010,N50A,2007.12.	1	S.N.A	
.....5	IC115	1107-001415	IC-FLASH MEMORY;29W320D,4Mx8/2Mx16Bit,TS	1	S.N.A	
....4	M0018	BN97-02084B	ASSY MICOM;T-CRL32PEUMD-0008.0,N50A,2007	1	S.N.A	
.....5	IC115	1107-001709	IC-FLASH MEMORY;MX25L1605A,16Mbit,2Mx8,S	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
...3	T0245	0202-001492	SOLDER-WIRE FLUX;HSE-02 LFM48 SR-34 S,-,	0.25	S.N.A	
0.1		BN91-02053A	ASSY SHIELD-AAE;LE37A456C1DXXC,N50A	1	S.N.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	6	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	4	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	1	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	4	S.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	1	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	9	S.N.A	
..2	M0081	6003-001439	SCREW-TAPTITE;BH,+,-,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BN39-00603G	LEAD CONNECTOR;RE26**AU,UL1007#26,14PIN,	1	S.A	
..2	M0258	BN39-00615Q	CBF HARNESS-INLET SOCKET;LN40A450C1D,UL1	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
..2	M2893	BN39-00789A	LEAD CONNECTOR;LA46F71BX,UL1007#26,UL100	1	S.A	
..2	M2893	BN39-00802G	LEAD CONNECTOR;SPD-63P71FHD,UL1617#22,24	1	S.A	
..2	T0764	BN44-00217A	SMPS-LCDTV;MK37P5B,SEM,AC/DC,171W,AC100	1	S.A	
..2	M0114	BN61-02500A	HOLDER-WIRE;NYLON6.6,NATURAL	4	S.N.A	
..2	M0115	BN61-02882A	BRACKET-STAND LINK;TULIP,40,SECC,T1.6,-,	1	S.A	
..2	M0254	BN61-03699A	HOLDER-SIDE AV;32L450,EO,HIPS,V0,-,-,-,B	1	S.N.A	
..2	M0107	BN63-03039A	SHIELD-COVER;MURANO40,PCM,T0.5,IDTV	1	S.N.A	
..2	T0447	BN96-06959B	ASSY BRACKET P-PANEL;37L450,AUO,,SECC,T1	1	S.N.A	
...3	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	2	S.A	
...3	M0146	BN61-03684A	BRACKET-PANEL TOP;37L450,SECC,T1.0,-,-,-	1	S.N.A	
...3		BN61-03689B	BRACKET-PANEL BOTTOM;L450 37INCH,SECC,T1	1	S.N.A	
...3		BN61-03692A	BRACKET-GUIDE MAIN;L450 37INCH,SECC,T1.0	1	S.N.A	
...3		BN61-03693A	BRACKET-GUIDE POWER;L450 37INCH,SECC,T1.	1	S.N.A	
...3		BN61-03696A	BRACKET-GUIDE POWER;L450 37INCH,SECC,T1.	2	S.N.A	
...3	T0101	BN61-03698A	BRACKET-WALL;L450 37INCH,SECC,T1.2	1	S.N.A	
...3	M0131	BN63-03370A	GASKET;LE37M86BDX,Conductive Fabric,10,7	1	S.N.A	
...3	M0131	BN63-03371A	GASKET;LE37M86BDX,Conductive Fabric,10,2	2	S.N.A	
...3	M0131	BN63-03507A	GASKET;LE37M87BDX,Conductive Fabric,10,2	1	S.N.A	
..2	M0214	BN96-07158C	ASSY CABLE P-FLAT;CORAL,FFC CABLE,331mm,	1	S.A	
..2	M0146	BN61-03879A	BRACKET-PANEL SIDE;L450 26INCH,SECC,T1.2	4	S.N.A	
0.1		BN91-02064C	ASSY LCD-AUO;LE37A456C1DXXC	1	S.N.A	
..2	M0215	BN07-00513A	LCD-PANEL;T370XW02 VC	1	S.A	
0.1	M0003	BN92-03169B	ASSY BOX;37L450,EO	1	S.N.A	
..2		BN69-02292D	BOX-SET,OUT;L450-37,CB,DY-01,AB,YEL,C3,E	1	S.N.A	
..2	M0521	BN69-02293A	BOX-SET,IN;L450-37,CB,C-01,DY-01,AB,W139	1	S.N.A	
0.1	M0113	BN92-03175B	ASSY P/MATERIAL;37L450,W/W	1	S.N.A	
..2	T0524	6902-000524	BAG PE;HDPE/NITRON,T0.015/T0.5,W1200,L11	1	S.N.A	
..2	T0214	AA61-00049B	HOLDER-BOX;DP,AA61-20285A,PP,NTR,V0	2	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	1.15	S.N.A	
..2	T0081	HA83-00057A	LP-TAPE-CELLULOSE;,HA02-030011,T0,046,W7	0.56	S.N.A	
0.1	M0019	BN92-03280C	ASSY LABEL;LE37A456C1DXXC,N50A	1	S.N.A	
0.1	M0045	BN92-03322C	ASSY ACCESSORY;LE37A456C1DXXC	1	S.N.A	
..2	M0045	BN96-07319A	ASSY ACCESSORY-MANUAL;LE26A456C1DXXC	1	S.A	
...3	T0210	AA68-03242K	MANUAL FLYER-01,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	ACCESSORY	AA68-03575A	MANUAL FLYER-02,REGISTRATION C;XEU,ENG,U	1	S.N.A	
...3	ACCESSORY	AA68-03575B	MANUAL FLYER-02,REGISTRATION C;XEG,GERMA	1	S.N.A	
...3	ACCESSORY	AA68-03575C	MANUAL FLYER-02,REGISTRATION C;XEF,FRENC	1	S.N.A	
...3	ACCESSORY	AA68-03575D	MANUAL FLYER-03,REGISTRATION C;XEC,SPANI	1	S.N.A	
...3	ACCESSORY	AA68-03575E	MANUAL FLYER-04,REGISTRATION C;XET,ITALY	1	S.N.A	
...3	ACCESSORY	AA68-03575F	MANUAL FLYER-02,REGISTRATION C;XEN,DUTCH	1	S.N.A	
...3	ACCESSORY	AA68-03575G	MANUAL FLYER-02,REGISTRATION C;XEP,PORTU	1	S.N.A	
...3	ACCESSORY	BN68-00514E	MANUAL FLYER-00,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3	T0511	BN68-01424A	MANUAL USERS;COMM,SAMSUNG,8Langs,W.Europ	1	S.N.A	
...3	T0091	HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	0.05	S.N.A	
..2	M0045	BN96-07319D	ASSY ACCESSORY-CABEL;LE37A456C1DXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	T0074	BN59-00684A	REMOCON;TM-96B,49,EUROPE_DTV-450	1	S.A	
...3		BN63-01798A	CLOTH-CLEAN;RE40**,CLOTH,180,200,RHCM	1	S.N.A	
...3	T0531	BN63-04243B	COVER-BOTTOM;37,40L450,HIPS,HB,BK500	1	S.N.A	
...3	T0091	HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	0.05	S.N.A	

5-8. LE40A45*C** Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE40A456C2DXXC	LE40A456C2D,N51A/40AC2-GCR,40,LCD-TV,SPA			
0.1	M0001	BN90-01503K	ASSY COVER FRONT;LE40A456C2DXXH	1	S.N.A	
..2	T0003	BN96-06786K	ASSY COVER P-FRONT;40L456,EO(iDTV),Squar	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	1	S.N.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
...3	CCM1	BN63-02183E	COVER-SHEET;Rhcm,PE Vinyl,T0.05,750mm,20	0.81	S.N.A	
...3	M0112	BN63-04170E	COVER-FRONT;40L456,EO(iDTV),ABS+PMMA,-,-	1	S.N.A	
....4		BN81-00204P	RESIN-HIGH GLOSS;SF-0505,K21294,ABS HB P	849.2	S.N.A	
...3	T0059	BN64-00379A	INDICATOR LED;ROME-II,23,PC,CLEAR	1	S.N.A	
...3	T0061	BN64-00453A	WINDOW-REMOCON;32R71,PC,V0,VIOLET,DIFFUS	1	S.N.A	
...3	T0022	BN64-00755A	KNOB-CONTROL;32L450,ABS,V0,BK07	1	S.N.A	
....4		BH83-00150P	CKD-ABS HB;HF-0680U,K2331	0.037	S.N.A	
...3		BN96-06795B	ASSY HOLDER P-BOSS;37,40L450,EO,HIPS,HB,	1	S.N.A	
....4		BN61-03677B	HOLDER-BOSS BOTTOM;37,40L450,EO,HIPS,HB,	1	S.N.A	
.....5		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.21	S.N.A	
....4		BN61-03261B	BOSS-TAPE;Tulip,ACRYL,T1.1,W20mm,GRAY,TA	0.74	S.N.A	
...3	M0145	BN96-07269A	ASSY BOARD P-FUNCTION;LN40A450C1D,CT5000	1	S.A	
...3	M0146	BN96-07270E	ASSY BOARD P-POWER & IR;LN40A450C1D,CT50	1	S.A	
...3	T0069	BP60-00015V	SPACER-FELT;L450 40",FELT,L900,BLK,T0.35	2	S.N.A	
...3	T0069	BP60-00015X	SPACER-FELT;L450 40",FELT,L510,BLK,T0.35	2	S.N.A	
...3	M0279	AA63-01637A	FELT;50P9,FELT,0.5,10,80	1	S.N.A	
...3		BN64-00795A	DECORATION-BOTTOM;L450 40INCH,PC,-,-,-,-	1	S.N.A	
....4		BN81-00116J	RESIN;PC CLEAR,3020IR,CLR,HF-1130R,-,-,-	203.5	S.N.A	
..2	T0175	BN96-06818D	ASSY SPEAKER P;8ohm,CORAL,L450,10W,400/6	1	S.A	
0.1	M0216	BN90-01572A	ASSY STAND;40L450,W/W	1	S.N.A	
..2	M0027	BN96-06259A	ASSY STAND P-BASE;37,40L450,,ABS+PMMA,HB	1	S.A	
...3	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.A	
...3	M0081	6003-001239	SCREW-TAPTITE;FH,+,-,B,M4,L10,ZPC(WHT),S	8	S.A	
...3		BN61-02248A	HOLDER-SWIVEL RING;40R71,ACETAL NATUAL,T	1	S.N.A	
...3		BN61-02883A	BRACKET-STAND BOTTOM;BORDEAUX PLUS,40,SE	1	S.N.A	
...3		BN61-02885A	HOLDER-SWIVEL RING;MURANO40,ACETAL NATUR	1	S.N.A	
...3		BN61-02886A	BRACKET-HINGE SWIVEL;BORDEAUX PLUS,40,SE	1	S.N.A	
...3	T0920	BN61-03681A	GUIDE-STAND;40L450,PC+GF 20%,-,-,-,BK500	1	S.N.A	
....4		BN81-00204H	RESIN;Trirex,3025G20 BK,ABS+PC G/F 20%,4	0.185	S.N.A	
...3	CCM1	BN63-02183E	COVER-SHEET;Rhcm,PE Vinyl,T0.05,750mm,20	0.5	S.N.A	
...3	T0004	BN63-03030A	COVER-STAND BASE;40R81,ABS+PMMA,-,-,-,HB	1	S.N.A	
....4		BN81-00204P	RESIN-HIGH GLOSS;SF-0505,K21294,ABS HB P	0.653	S.N.A	
...3	M0126	BN73-00052C	RUBBER-FOOT;LCD TV,CR RUBBER,T2.0 DIA19,	4	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.A	
0.1	M0002	BN90-01574B	ASSY COVER REAR;40L450,EO(iDTV)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	11	S.A	
..2	M0013	BN96-07204B	ASSY COVER P-REAR;40L450,EO(iDTV),HIPS,H	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
...3	T0101	BN61-03348A	BRACKET-WALL;LCD TV 32,SECC T1.2,-,-,-,-	2	S.N.A	
...3	M0006	BN63-04247B	COVER-REAR;40L450,EO(iDTV),HIPS,HB,BK500	1	S.N.A	
....4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	,730.200	S.N.A	
...3	T0071	BN64-00776A	INLAY-TERMINAL;L450,EO(IDTV),PS SHEET,T0	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
...3		BN63-01151D	FELT-NON WOVEN;SP20UO,FELT,T0.5,10,90	4	S.N.A	
0.1		BN91-01985C	ASSY LCD-AMLCD;LN40A450C1DXZA,LTF400AA01	1	S.N.A	
..2	M0215	BN07-00523A	LCD-PANEL;LTF400AA01	1	S.A	
0.1	M0017	BN91-02045H	ASSY CHASSIS;LE40A457C1DXXU	1	S.N.A	
..2	M0014	BN94-01672G	ASSY PCB MAIN-AMLCD;LE40A456C1DXXC	1	S.A	
...3	T0245	0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	S.N.A	
...3	JA3003_3H	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	JA3004	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	JA7201	3709-001508	CONNECTOR-CARD SLOT;68P,1.27mm,PIN,PCMCI	1	S.A	
...3	CN330	3711-000058	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5MM,AN	1	S.A	
...3	CN330	3711-004484	HEADER-BOARD TO CABLE;BOX,5P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-004531	HEADER-BOARD TO CABLE;BOX,10P,1R,2mm,ANG	1	S.A	
...3	CN330	3711-005842	HEADER-BOARD TO CABLE;BOX,24P,2R,2MM,STR	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN3214_SV	3722-002275	JACK-DIN;4P,-,SN,BLK,-	1	S.A	
...3	JA3204_SH	3722-002680	JACK-EAR PHONE;6P,NiSn,BLK,ANGLE	1	S.A	
...3	JA3201	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002690	JACK-PIN;3P,Ni,RED/WHT/YEL,ANGLE	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	CIS3	BN40-00120A	TUNER;TDHG6-K10A,TDHG6-K10A,DVB-T,181CH,	1	S.A	
...3	M0107	BN63-04528A	SHIELD-COVER;450 EO,SPTE,T0.3,PAL NORMA	1	S.N.A	
...3	HDCP	BN97-00688A	ASSY HDCP;BN46-00018A,PS-42V6S,D73A,GENE	1	S.N.A	
....4		BN46-00018A	KEY CODE-CERTIFICATE;(HDCP KEY)PPM42M5S,	1	S.N.A	
...3		BN97-02055H	ASSY SMD-AMLCD VE;LE40A457C1DXXC	1	S.N.A	
....4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,-,D20~45##,96.5Sn/	3.137	S.N.A	
....4	D2001	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2002	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2003	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2009	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2012	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2015	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D1004	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3003	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3004	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3006	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3007	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3009	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3011	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3012	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3013	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3016	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3017	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3019	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3021	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3022	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3023	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3024	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3025	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3026	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3027	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3030_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3031_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3034_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3035_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3036_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3037_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3038_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3039_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3040_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3041_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3045	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3046	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3047	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3064	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3066	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3078	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3202	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3203	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3204	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3205	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3206	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3207	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3217	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3218	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3219	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3230_SA	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3236_SH	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D1002	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D2019	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3063	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3065	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3067	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3077	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3079	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3080_3H	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3244_SH	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D1001	0402-001098	DIODE-RECTIFIER;SK34,40V,3A,SMC,TP	1	S.A	
....4	D1098_40_L	0402-001098	DIODE-RECTIFIER;SK34,40V,3A,SMC,TP	1	S.A	
....4	D2008	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3020	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3033_3H	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3048	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3049	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3050	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3051	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3052	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3074	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3070	0403-000258	DIODE-ZENER;BZX84C5V6,5.2-6V,225mW,SOT-2	1	S.A	
....4	D3216	0403-000607	DIODE-ZENER;VLZ16C,15.69/16.51V,500mW,SO	1	S.A	
....4	D3229	0403-000607	DIODE-ZENER;VLZ16C,15.69/16.51V,500mW,SO	1	S.A	
....4	D3002	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3015	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3029_3H	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3042	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D5002	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3001	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3014	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3028_3H	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3208_SV	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D5201	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D1005	0403-001425	DIODE-ZENER;BZX84C33,31-35V,350mW,SOT-23	1	S.A	
....4	D0254	0404-001271	DIODE-SCHOTTKY;SSA34,40V,3000mA,SMA,TP	1	S.A	
....4	D3053	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3054	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3055	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3056	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3057	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3058	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3068	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3069	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3212	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3213	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3214	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3215	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3220	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3221	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3222	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3223	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3224	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3225	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3226	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3227	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3228	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3231_SA	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3232_SA	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3233_SA	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3237_SH	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3238_SH	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3239_SV	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3240_SV	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D2013	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D3071	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D3072	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7201	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7202	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7203	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7204	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7205	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7206	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	Q7001	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,	1	S.A	
....4	Q7002	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,	1	S.A	
....4	Q7402	0501-000434	TR-SMALL SIGNAL;KTC3875S-GR,NPN,150mW,SO	1	S.A	
....4	Q1001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q1002_L	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2002	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2003	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3006	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3207	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3208	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5002	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5201	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5202	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q6003_L	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2005	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q2006	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q3202	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q3205	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q1004_L	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3201	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3203	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3204	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3206	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q6004_40_L	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001165	FET-SILICON;SI3443BDV,P,-20V,+-4.4A,65mo	1	S.A	
....4	Q409	0505-001170	FET-SILICON;SI9933ADY-T1,P,-20V,3.4A,0.0	1	S.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002432	IC-CMOS LOGIC;74LVC244,8BIT BUFFER/DRIVE	1	S.N.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-003239	IC-CMOS LOGIC;74LVC1G00,2-input NAND Gat	1	S.A	
....4	IC104	0801-003239	IC-CMOS LOGIC;74LVC1G00,2-input NAND Gat	1	S.A	
....4	IC2002	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC5203	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC106	1001-001082	IC-VIDEO SWITCH;BA7657F,-,SOP,24P,300MIL	1	S.A	
....4	IC3011	1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	1	S.A	
....4	IC106	1001-001440	IC-VIDEO SWITCH;SiI9185CTU,QFP,80P,3.3V,	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC110	1006-001076	IC-DRIVER/RECEIVER;MAX232ECWE+T,SOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC112	1103-001410	IC-EEPROM;S-24CS08AFJ-TB-1GE,8Kbit,1Kx8,	1	S.A	
....4	IC113	1105-001712	IC-DRAM;HYB25D256163CE,DDR,256Mbit,16Mx1	1	S.A	
....4	IC5201	1105-001838	IC-DDR SDRAM;EM6A9160TS0A-5G,DDR SDRAM,1	1	S.A	
....4	DU410	1201-000166	IC-OP AMP;LM358,SOP,ST,8P,150MIL,DUAL,10	1	S.A	
....4	DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	1	S.A	
....4	DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	1	S.A	
....4	T0085	1201-002487	IC-AUDIO AMP;MAX9728A,QFN,12P,3x3mm,DUAL	1	S.A	
....4	T0124	1201-002677	IC-POWER AMP;NTP3100,QFN56,56P,8x8mm,DUA	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002974	IC-POSI.FIXED REG.;AP1117D-25A,TO-252,3P	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	T0170	1203-003059	IC-SWITCH VOL. REG.;MP1583,SOIC,8P,4.9x3	1	S.A	
....4	IC7206	1203-003394	IC-POWER SUPERVISOR;MIC2544-1YM,SOP,8P,4	1	S.A	
....4	T0087	1203-003696	IC-POSI.FIXED REG.;NCP1117DT18T5G,DPAK,3	1	S.A	
....4	IC5002	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC2005	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC7402	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	T0087	1203-004816	IC-POSI.FIXED REG.;KIA78D015F,DPAK,3P,6.	1	S.A	
....4	IC118	1204-002779	IC-VIDEO PROCESS;S4LF122X01,PBGA,208P,17	1	S.A	
....4	IC7001	1204-002861	IC-DECODER;UPD61211GM-104-GAA-A,QFP,216P	1	S.A	
....4	IC109	1205-003432	IC-LCD CONTROLLER;SEMS01,LQFP,256P,30x30	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	IC3012	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	IC3013	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	IC3014_3H	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	R110	2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000242	R-CHIP;1.5Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001217	R-CHIP;82ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001217	R-CHIP;82ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001307	R-CHIP;180ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001307	R-CHIP;180ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001317	R-CHIP;910ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001317	R-CHIP;910ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007307	R-CHIP;150ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007319	R-CHIP;390ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007334	R-CHIP;200Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007334	R-CHIP;200Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007334	R-CHIP;200Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007469	R-CHIP;110ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007791	R-CHIP;9.1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007791	R-CHIP;9.1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-008429	R-CHIP;499ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-008649	R-CHIP;220ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	RA5012	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5013	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5014	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA6007_L	2011-000686	R-NETWORK;56ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5021	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5022	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5023	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5201	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5202	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5203	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5204	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5205	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7203	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7204	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5006	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6004_FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6005_FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6006_FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA5001	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5002	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5003	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5004	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5015	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5025	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5030	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5031	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5034	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7009	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7010	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7011	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7012	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7209	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7001	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7002	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7003	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7004	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7005	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7006	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7007	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7008	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7205	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7210	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5005	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5007	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5008	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5016	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5017	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5018	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5019	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5020	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5026	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5027	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5028	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5029	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5032	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5033	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7201	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7202	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000975	C-CER,CHIP;47nF,10%,25V,X7R,TP,1608,-	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005261	C-CER,CHIP;1000nF,10%,25V,X7R,3216	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005533	C-CER,CHIP;1000nF,20%,6.3V,X7R,TP,1608	1	S.A	
....4	C120	2203-005533	C-CER,CHIP;1000nF,20%,6.3V,X7R,TP,1608	1	S.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,1005	1	S.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006513	C-CER,CHIP;0.047NF,5%,50V,C0G,TP,1005	1	S.N.A	
....4	C120	2203-006513	C-CER,CHIP;0.047NF,5%,50V,C0G,TP,1005	1	S.N.A	
....4	C120	2203-006513	C-CER,CHIP;0.047NF,5%,50V,C0G,TP,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006708	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-006708	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-006708	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-006842	C-CER,CHIP;0.47nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C1015	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
....4	C3056	2402-001129	C-AL,SMD;47UF,20%,16V,WT,TP,6.3X5.2MM	1	S.A	
....4	C1025	2402-001238	C-AL,SMD;1uF,20%,50V,HR,TP,4.3x4.3x5.2mm	1	S.A	
....4	C1005	2402-001257	C-AL,SMD;470uF,20%,16V,-,TP,8.3*10	1	S.A	
....4	C1039	2402-001257	C-AL,SMD;470uF,20%,16V,-,TP,8.3*10	1	S.A	
....4	C1010	2402-001259	C-AL,SMD;220uF,20%,16V,WT,REEL,8X10	1	S.A	
....4	C2014	2402-001330	C-AL,SMD;330uF,20%,25V,TP,10x10mm	1	S.N.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000417	INDUCTOR-SMD;220uH,5%,3225	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001426	INDUCTOR-SMD;680uH,20%,7070	1	S.A	
....4	T0052	2703-001778	INDUCTOR-SMD;3.3uH,20%,3225	1	S.A	
....4	T0052	2703-002722	INDUCTOR-SMD;22uH,20%,12x12mm	1	S.A	
....4	L2001	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	L2002	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	X202	2801-003667	CRYSTAL-SMD;14.31818MHz,30ppm,28-AAN,16p	1	S.A	
....4	X202	2801-003954	CRYSTAL-SMD;27MHz,30ppm,28-AAN,16pF,50oh	1	S.A	
....4	F103	2901-001114	FILTER-EMI SMD;25VDC,2.0ADC,-,100nF,3.2x	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001278	BEAD-SMD;120ohm,1608,200mA,TP,169ohm/174	1	S.N.A	
....4	T0568	3301-001278	BEAD-SMD;120ohm,1608,200mA,TP,169ohm/174	1	S.N.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	


Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001393	BEAD-SMD;60ohm,3216,1500mA,TP,41ohm/40MH	1	S.N.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	JA3001	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	JA3002	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	CN6001_L	3708-001150	CONNECTOR-FPC/FFC/PIC;30P,1mm,SMD-A,SN,Y	1	S.A	
....4	T0077	BN41-00980A	PCB MAIN;Coral iDTV Normal,FR-4,4,1.6T,1	1	S.N.A	
....4	M0018	BN97-02084A	ASSY MICOM;T-PERLDEUC-0010,N50A,2007.12.	1	S.N.A	
.....5	IC115	1107-001415	IC-FLASH MEMORY;29W320D,4Mx8/2Mx16Bit,TS	1	S.N.A	
....4	M0018	BN97-02084B	ASSY MICOM;T-CRL32PEUMD-0008.0,N50A,2007	1	S.N.A	
.....5	IC115	1107-001709	IC-FLASH MEMORY;MX25L1605A,16Mbit,2Mx8,S	1	S.A	
....4	R110	2007-000139	R-CHIP;220ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002796	R-CHIP;510ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-007141	R-CHIP;240ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	T0568	3301-001412	BEAD-SMD;60ohm,2012,800mA,TP,65ohm/110MH	1	S.N.A	
....4	IC104	0801-002633	IC-CMOS LOGIC;7WBD3125,2bit BUS SWITCH,S	1	S.A	
....4	IC104	0801-002633	IC-CMOS LOGIC;7WBD3125,2bit BUS SWITCH,S	1	S.A	
....4	IC104	0801-002633	IC-CMOS LOGIC;7WBD3125,2bit BUS SWITCH,S	1	S.A	
....4	IC104	0801-002633	IC-CMOS LOGIC;7WBD3125,2bit BUS SWITCH,S	1	S.A	
....4	C120	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.A	
0.1		BN91-02054A	ASSY SHIELD-AAH;LE40A456C1DXXC,N50A	1	S.N.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	6	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	6	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	1	S.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	1	S.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	1	S.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	2	S.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	5	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001439	SCREW-TAPTITE;BH,+,-,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BN39-00674A	LEAD CONNECTOR;LNR469DX/XAA,UL1007#26,5P	1	S.A	
..2	M2893	BN39-00802F	LEAD CONNECTOR;LE46S86BDX,UL1007#26,24PI	1	S.A	
..2	M2893	BN39-00830C	LEAD CONNECTOR;LN40A450C1D,UL3443 #28,7P	1	S.A	
..2	M2893	BN39-01021A	LEAD CONNECTOR;LN46A550P,UL1007#26,2pin,	1	S.A	
..2	M0174	BN44-00197A	IP BOARD;SIP408A,PEARL,15mA,130mA,150Hz,	1	S.A	
..2	M0114	BN61-02500A	HOLDER-WIRE;NYLON6.6,NATURAL	4	S.N.A	
..2	M0115	BN61-02882A	BRACKET-STAND LINK;TULIP,40,SECC,T1.6,-,	1	S.N.A	
..2	M0254	BN61-02952K	HOLDER-SIDE AV;32S81,EO(HOTEL),HIPS,V0,-	1	S.N.A	
...3		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	17.3	S.N.A	
..2	M0146	BN61-03415A	BRACKET-PANEL TOP;PEONY 46,SECC T1.2	2	S.N.A	
..2	T0101	BN61-03700A	BRACKET-WALL;L450 40INCH,SECC,T1.2,-,-,-	1	S.N.A	
..2	M0107	BN63-03039A	SHIELD-COVER;MURANO40,PCM,T0.5,IDTV	1	S.N.A	
..2	M0125	BN96-04938B	ASSY INLET P;UL1617#22,250/250mm	1	S.A	
..2	T0447	BN96-06960A	ASSY BRACKET P-PANEL;40A450C,SECC,T1.0,C	1	S.N.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	1	S.N.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	1	S.N.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
...3	M0131	AA63-01438A	GASKET;Bordeaux,Conductive Fabric,7mm,8m	1	S.N.A	
...3		BN61-02879A	BRACKET-GUIDE MAIN;TULIP,40,SECC,T1.2,-,	1	S.N.A	
...3		BN61-02880A	BRACKET-GUIDE POWER R;TULIP,40,SECC,T1.2	1	S.N.A	
...3		BN61-02881A	BRACKET-GUIDE POWER L;TULIP,40,SECC,T1.2	1	S.N.A	
...3		BN61-03697A	BRACKET-GUIDE POWER R;L450 40INCH,SECC,T	1	S.N.A	
...3		BN61-03861A	BRACKET-PANEL BOTTOM;L450 40INCH,SECC,T1	1	S.N.A	
...3	M0131	BN63-03519A	GASKET;Tulip,Conductive Fabric,10,14,300	3	S.N.A	
..2	M0214	BN96-07158P	ASSY CABLE P-FLAT;CORAL,FFC CABLE,420mm,	1	S.A	
0.1	M0003	BN92-03170K	ASSY BOX;LE40A456C2DXXH	1	S.N.A	
..2	M0521	BN69-02287A	BOX-SET,IN;L450-40,CB,A1,DY-01,W1463,D75	1	S.N.A	
..2		BN69-02620H	BOX-SET,OUT;40L450,CB,C-03,DW-75,YEL,W10	1	S.N.A	
0.1	M0113	BN92-03176B	ASSY P/MATERIAL;40L450,EO	1	S.N.A	
..2	T0524	6902-000524	BAG PE;HDPE/NITRON,T0.015/T0.5,W1200,L11	1	S.N.A	
..2	T0003	6902-000604	BAG WRAPPING;LDPE,T0.02,W500,L10000,TRP,	7.8	S.N.A	
..2		6922-000003	BAND PP;PP,T0.8,W18,L1650M,TRP,DA69-9014	4.86	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	1.23	S.N.A	
..2	T0214	AA61-20285C	HOLDER-BOX;CORAL,PP,BLACK,HB	2	S.N.A	
0.1	M0019	BN92-03280G	ASSY LABEL;LE32A456C2CXXE	1	S.N.A	
0.1	M0045	BN92-03322D	ASSY ACCESSORY;LE40A456C1DXXC	1	S.A	
..2	M0045	BN96-07319A	ASSY ACCESSORY-MANUAL;LE26A456C1DXXC	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	T0511	BN68-01424A	MANUAL USERS;COMM,SAMSUNG,8Langs,W.Europ	1	S.N.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2	1	S.N.A	
...3		AA68-03242K	MANUAL FLYER-02,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3		AA68-03575A	MANUAL FLYER-02,REGISTRATION C;XEU,ENG,U	1	S.N.A	
...3		AA68-03575B	MANUAL FLYER-02,REGISTRATION C;XEG,GERMA	1	S.N.A	
...3		AA68-03575C	MANUAL FLYER-02,REGISTRATION C;XEF,FRENC	1	S.N.A	
...3		AA68-03575D	MANUAL FLYER-03,REGISTRATION C;XEC,SPANI	1	S.N.A	
...3		AA68-03575E	MANUAL FLYER-04,REGISTRATION C;XET,ITALY	1	S.N.A	
...3		AA68-03575F	MANUAL FLYER-02,REGISTRATION C;XEN,DUTCH	1	S.N.A	
...3		AA68-03575G	MANUAL FLYER-02,REGISTRATION C;XEP,PORTU	1	S.N.A	
...3	T0175	BN68-00514E	MANUAL FLYER-01,WARRANTY CARD;comm,Samsu	1	S.N.A	
..2	M0045	BN96-07319E	ASSY ACCESSORY-CABLE;LE40A456C1DXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2	1	S.N.A	
...3	T0074	BN59-00684A	REMOCON;TM-96B,49,EUROPE_DTV-450	1	S.A	
...3		BN63-01798A	CLOTH-CLEAN;RE40**,CLOTH,180,200,RHCM	1	S.N.A	
...3	T0531	BN63-04243B	COVER-BOTTOM;37,40L450,HIPS,HB,BK500	1	S.N.A	
....4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.06	S.N.A	

5. Exploded View & Part List


5-1. LE26A45*C** Exploded View

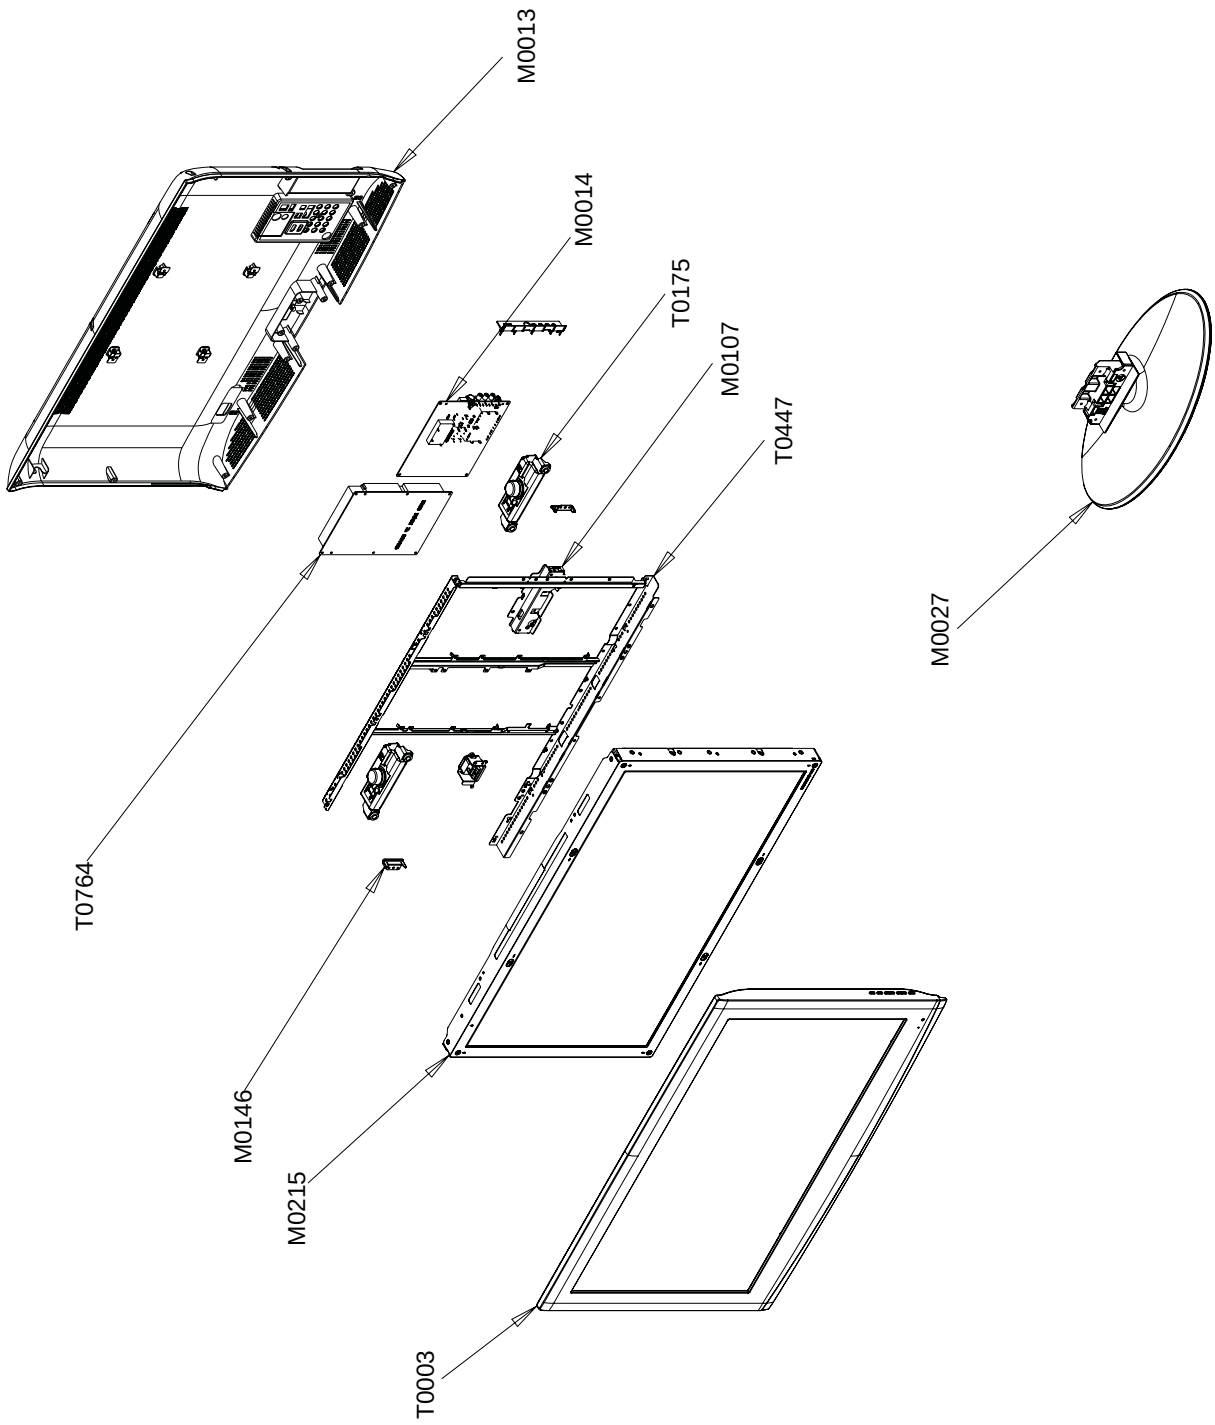

5-1-2. LE26A45*C** Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-06783D	ASSY COVER P-FRONT;26L450,EO(iDTV),ABS+P	1	S.A	
M0215	BN07-00510A	LCD-PANEL;T260XW02 VL	1	S.A	
T0175	BN96-06822B	ASSY SPEAKER P;8ohm,CORAL,LCD 26",5W,4pi	1	S.A	
M0115	BN61-02947A	BRACKET-STAND LINK;JASMINE 32",SECC,T1.6	1	S.A	
M0254	BN61-03699A	HOLDER-SIDE AV;32L450,EO,HIPS,V0,-,-,-,B	1	S.N.A	
T0447	BN96-06957A	ASSY BRACKET P-PANEL;26A450C,SECC,T1.0,C	1	S.N.A	
M0146	BN61-03682A	BRACKET-PANEL TOP;L450 26INCH,SECC,T1.0	1	S.N.A	
M0014	BN94-01672A	ASSY PCB MAIN-AUO;LE26A456C1DXXC,N50A	1	S.A	
T0764	BN44-00214A	SMPS-LCDTV;MK32P5B,DYREL,AC/DC,137W,AC10	1	S.A	
M0013	BN96-07209B	ASSY COVER P-REAR;26L450,EO(iDTV),HIPS,H	1	S.A	
M0027	BN96-06463A	ASSY STAND P-BASE;26L450,,ABS+PMMA,HB,BK	1	S.A	


5-2. LE32A45*C** Exploded View

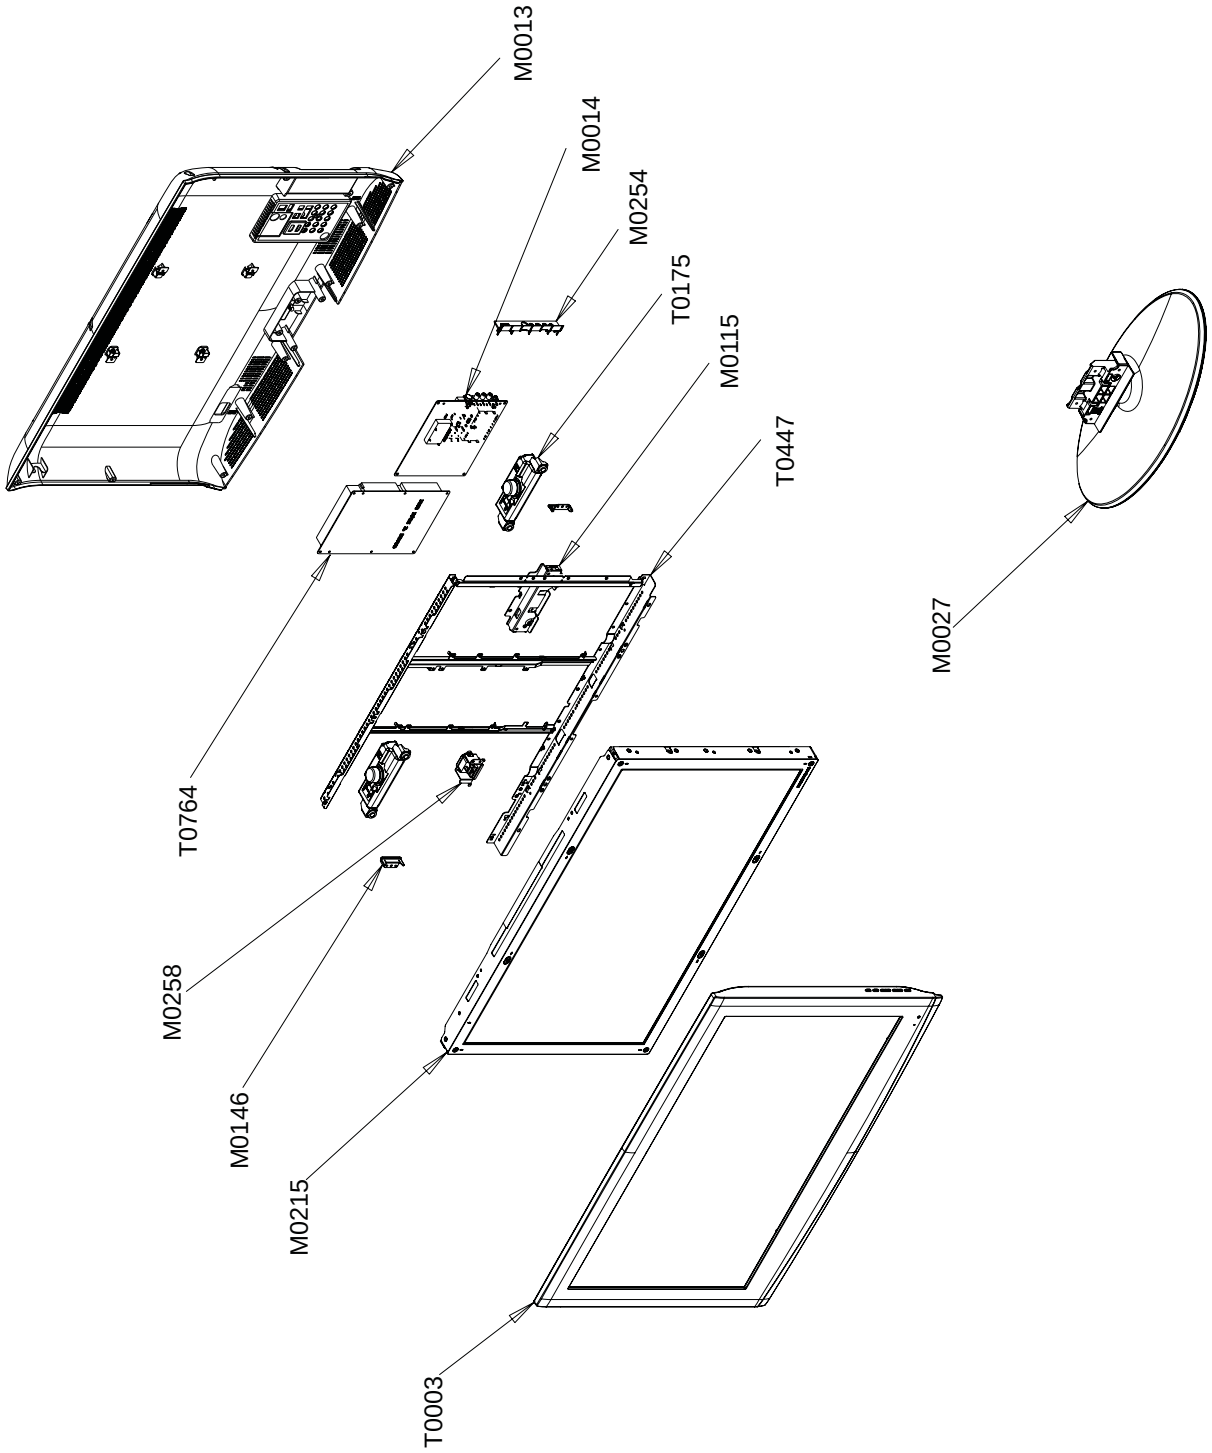

5-2-1. LE32A45*C** Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-06784K	ASSY COVER P-FRONT;32L456,EO(iDTV),Squar	1	S.A	
M0215	BN07-00538A	LCD-PANEL;LTF320AB01	1	S.A	
T0175	BN96-06818C	ASSY SPEAKER P;8ohm,CORAL,L450,10W,550/3	1	S.A	
M0115	BN61-02947A	BRACKET-STAND LINK;JASMINE 32",SECC,T1.6	1	S.A	
M0254	BN61-03699A	HOLDER-SIDE AV;32L450,EO,HIPS,V0,-,-,-,B	1	S.N.A	
T0447	BN96-06958B	ASSY BRACKET P-PANEL;32A450C,SECC,T1.0,C	1	S.N.A	
M0146	BN61-03678B	BRACKET-PANEL TOP;L450 32INCH,SECC,T1.2,	1	S.N.A	
T0764	BN44-00221A	SMPS-LCDTV;MK32P5B,DELTA,AC/DC,137W,AC10	1	S.A	
M0014	BN94-01967E	ASSY PCB MAIN-AMLCD VE;LE32A457C1DXXC	1	S.A	
M0013	BN96-07208B	ASSY COVER P-REAR;32L450,EO(iDTV),HIPS,H	1	S.A	
M0027	BN96-07211A	ASSY STAND P-BASE;32L450,W/W,ABS+PMMA,HB	1	S.A	


5-3. LE37A45*C** Exploded View

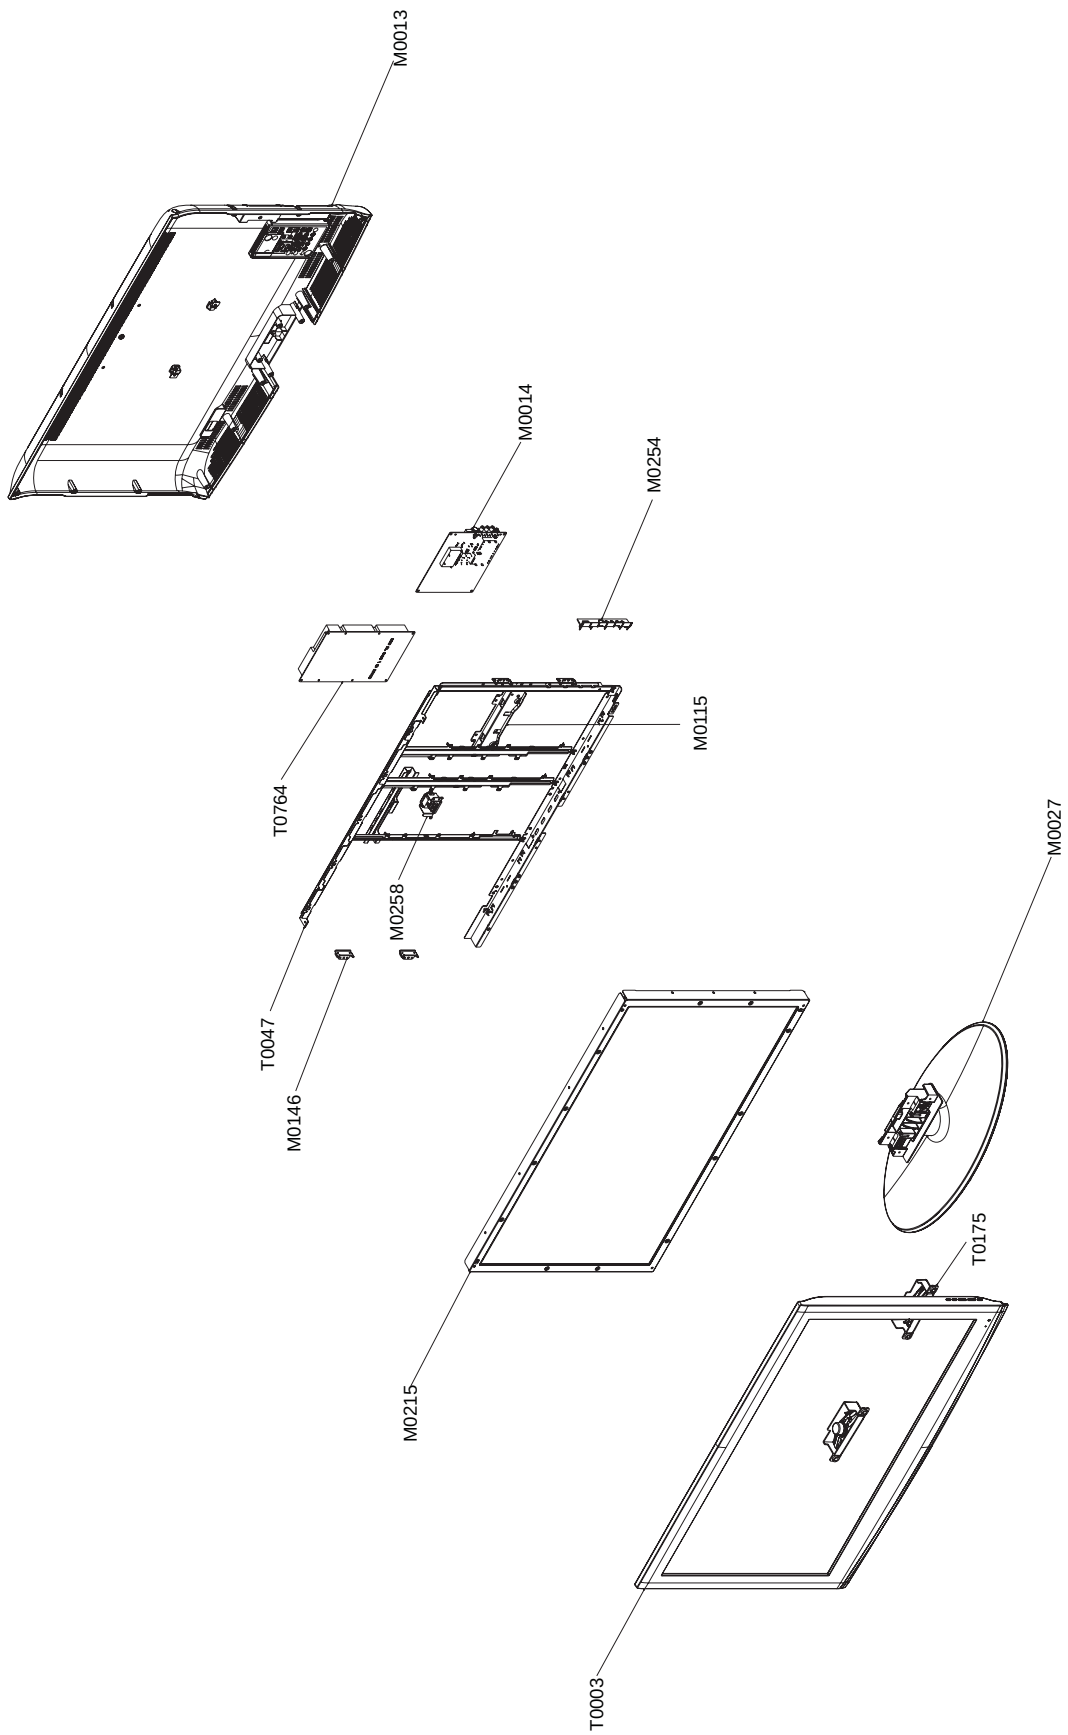

5-3-1. LE37A45*C** Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-06785H	ASSY COVER P-FRONT;37L450,EO(iDTV),Squar	1	S.A	
M0215	BN07-00446A	LCD-PANEL;CLAA370WA03SC	1	S.A	
T0175	BN96-06818C	ASSY SPEAKER P;8ohm,CORAL,L450,10W,550/3	1	S.A	
M0115	BN61-02882A	BRACKET-STAND LINK;TULIP,40,SECC,T1.6,-,	1	S.A	
M0254	BN61-03699A	HOLDER-SIDE AV;32L450,EO,HIPS,V0,-,-,-,B	1	S.N.A	
T0447	BN96-06959H	ASSY BRACKET P-PANEL;37L450,CPT(07),SECC	1	S.N.A	
M0146	BN61-03684B	BRACKET-PANEL TOP;L450 37INCH,SECC,T1.0	1	S.N.A	
M0014	BN94-02229B	ASSY PCB MAIN-ACE;LE37A457C1DX*	1	S.A	
T0764	BN44-00217A	SMPS-LCDTV;MK37P5B,SEM,AC/DC,171W,AC100	1	S.A	
M0013	BN96-07207B	ASSY COVER P-REAR;37L450,EO(iDTV),HIPS,H	1	S.A	
M0027	BN96-06259A	ASSY STAND P-BASE;37,40L450,,ABS+PMMA,HB	1	S.A	

5-4. LE40A45*C** Exploded View

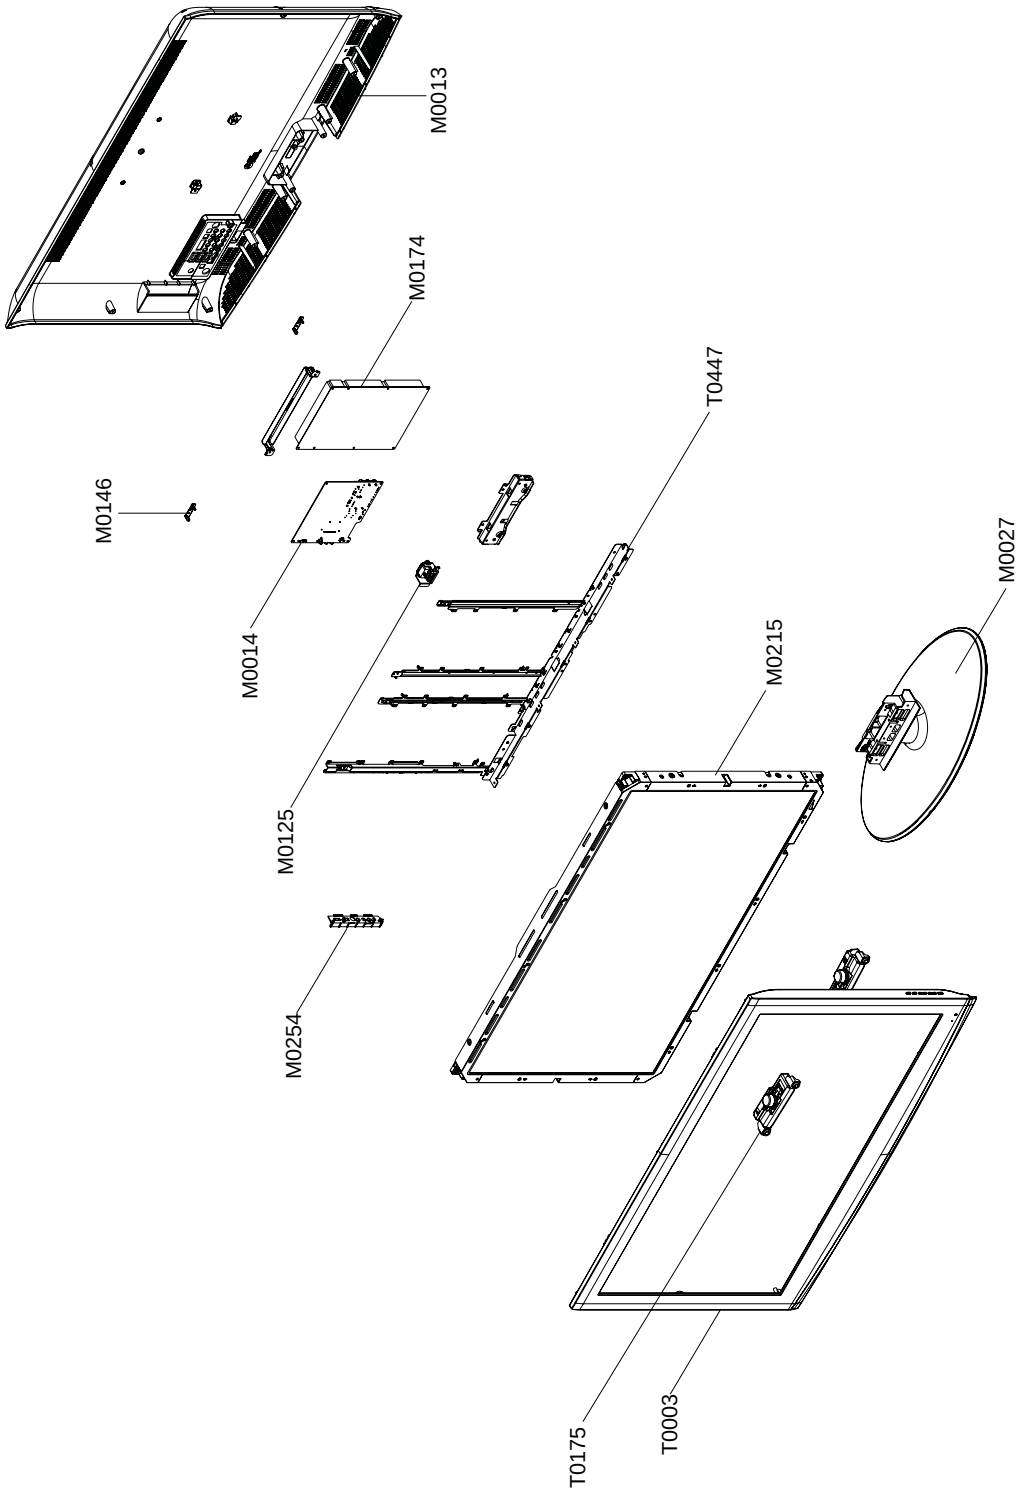

5-4-1. LE40A45*C** Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
T0003	BN96-06786K	ASSY COVER P-FRONT;40L456,EO(iDTV),Squar	1	S.A	
M0215	BN07-00523A	LCD-PANEL;LTF400AA01	1	S.A	
M0115	BN61-02882A	BRACKET-STAND LINK;TULIP,40,SECC,T1.6,-,	1	S.A	
T0447	BN96-06960A	ASSY BRACKET P-PANEL;40A450C,SECC,T1.0,C	1	S.N.A	
M0146	BN61-03415A	BRACKET-PANEL TOP;PEONY 46,SECC T1.2	2	S.N.A	
M0014	BN94-01967P	ASSY PCB MAIN-AMLCD;LE40A456C1DXXC	1	S.A	
M0125	BN96-04938B	ASSY INLET P;UL1617#22,250/250mm	1	S.A	
M0254	BN61-02952K	HOLDER-SIDE AV;32S81,EO(HOTEL),HIPS,V0,-	1	S.N.A	
M0013	BN96-07204B	ASSY COVER P-REAR;40L450,EO(iDTV),HIPS,H	1	S.A	
M0027	BN96-06259A	ASSY STAND P-BASE;37,40L450,,ABS+PMMA,HB	1	S.A	

5-5. LE26A45*C** Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE26A457C1DXXC	LE26A457C1D,N50A/26AC1-GCR,26,LCD-TV,SPA			
0.1	M0001	BN90-01500D	ASSY COVER FRONT;26L450,EO(iDTV)	1	S.N.A	
..2	T0003	BN96-06783D	ASSY COVER P-FRONT;26L450,EO(iDTV),ABS+P	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	1	S.N.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
...3	T0069	AA60-00091K	SPACER-FELT;-,FELT,330X10,-,-,BLK,T0.35,	2	S.N.A	
...3	T0069	AA60-00091N	SPACER-FELT;-,FELT,70X10,-,-,BLK,T1.0,-,	1	S.N.A	
...3	T0069	BN60-00048A	SPACER-FELT;50Q9,FELT,620L,BLK,0.35T,10W	2	S.N.A	
...3		BN61-03676B	HOLDER-BOSS BOTTOM;26L450,EO,HIPS,HB,-,-	1	S.N.A	
...3	CCM1	BN63-02183D	COVER-SHEET;Rhcm,PE Vinyl,T0.05,680mm,20	0.559	S.N.A	
...3	M0112	BN63-04168D	COVER-FRONT;26L450,EO(iDTV),ABS+PMMA,-,-	1	S.N.A	
...3	T0059	BN64-00379A	INDICATOR LED;ROME-II,23,PC,CLEAR	1	S.N.A	
...3	T0061	BN64-00453A	WINDOW-REMOCON;32R71,PC,V0,VIOLET,DIFFUS	1	S.N.A	
...3	T0022	BN64-00755A	KNOB-CONTROL;32L450,ABS,V0,BK07	1	S.N.A	
...3		BN64-00757A	DECORATION-BOTTOM;L450 26INCH,PC,-,-,-,-	1	S.N.A	
...3	M0145	BN96-07269A	ASSY BOARD P-FUNCTION;LN40A450C1D,CT5000	1	S.A	
...3	M0146	BN96-07270D	ASSY BOARD P-POWER & IR;LN32A450C1D,CT50	1	S.A	
...3		BN61-03261B	BOSS-TAPE;Tulip,ACRYL,T1.1,W20mm,GRAY,TA	0.8	S.N.A	
..2	T0175	BN96-06822B	ASSY SPEAKER P;8ohm,CORAL,LCD 26",5W,4pi	1	S.A	
0.1	M0216	BN90-01511A	ASSY STAND;26L450,UO,,,	1	S.N.A	
..2	M0027	BN96-06463A	ASSY STAND P-BASE;26L450,,ABS+PMMA,HB,BK	1	S.A	
...3	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.A	
...3	M0081	6003-001239	SCREW-TAPTITE;FH,+,-,B,M4,L10,ZPC(WHT),S	4	S.A	
...3	T0920	BN61-03680A	GUIDE-STAND;22,26L450,ABS HB,-,-,-,BK500	1	S.N.A	
...3	T0004	BN63-03122A	COVER-STAND BASE;23,26R81,ABS+PMMA,-,-,-	1	S.N.A	
...3		BN61-02954A	BRACKET-STAND BOTTOM;23,26 BORDEAUX PLUS	1	S.N.A	
...3	T0132	BN73-00052A	RUBBER FOOT;ARES 17,CR Rubber Gray,T1.5	4	S.N.A	
..2	T0524	6902-000561	BAG PE;HDPE+NITRON(DOUBLE),T0.015+T0.5,W	1	S.N.A	
0.1	M0002	BN90-01578B	ASSY COVER REAR;26L450,EO(iDTV)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	11	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	M0013	BN96-07209B	ASSY COVER P-REAR;26L450,EO(iDTV),HIPS,H	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	4	S.N.A	
...3	T0101	BN61-03346A	BRACKET-WALL;LCD TV,SECC,T1.2	4	S.N.A	
...3	M0006	BN63-04244B	COVER-REAR;26L450,EO(iDTV),HIPS,HB,BK500	1	S.N.A	
...3	T0071	BN64-00758A	INLAY-TERMINAL;26,32,37L450,PS SHEET,T0.	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
0.1	M0017	BN91-02045A	ASSY CHASSIS;LE26A456C1DXXC,N50A	1	S.N.A	
..2	M0014	BN94-01672A	ASSY PCB MAIN-AUO;LE26A456C1DXXC,N50A	1	S.A	
...3		0202-001557	SOLDER-CREAM;LST57-A,D38-63,42SN/57BI/1A	11	S.N.A	
...3	JA3003_3H	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	JA3004	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	JA7201_OP	3709-001508	CONNECTOR-CARD SLOT;68P,1.27mm,PIN,PCMCI	1	S.A	
...3	CN330	3711-000012	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5MM,ST	1	S.A	
...3	CN330	3711-003846	HEADER-BOARD TO CABLE;BOX,8P,1R,2mm,ANGL	1	S.A	
...3	CN330	3711-004379	HEADER-BOARD TO CABLE;BOX,4P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-004484	HEADER-BOARD TO CABLE;BOX,5P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-004484	HEADER-BOARD TO CABLE;BOX,5P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-004712	HEADER-BOARD TO CABLE;BOX,9P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-005842	HEADER-BOARD TO CABLE;BOX,24P,2R,2MM,STR	1	S.A	
...3	JA330	3722-001055	JACK-PHONE;5P/2C,AG,BLK,ANGLE	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN3214	3722-002275	JACK-DIN;4P,-,SN,BLK,-	1	S.A	
...3	JA3201	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002704	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	CIS3	BN40-00120A	TUNER;TDHG6-K10A,TDHG6-K10A,DVB-T,181CH,	1	S.A	
...3	M0107	BN63-01847A	SHIELD-COVER;ROME,SECC,T0.3,49.5,79.5,HE	1	S.N.A	
...3	HDCP	BN97-00688A	ASSY HDCP;BN46-00018A,PS-42V6S,D73A,GENE	1	S.N.A	
....4		BN46-00018A	KEY CODE-CERTIFICATE;(HDCP KEY)PPM42M5S,	1	S.N.A	
...3	T0174	BN97-02055A	ASSY SMD;LE26A456C1DXXC,AUO	1	S.N.A	
....4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,-,D20~45##,96.5Sn/	2.772	S.N.A	
....4	D2002	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2003	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2004	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2009	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2012	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2019	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D3244	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D1004	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3003	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3004	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3006	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3007	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3009	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3011	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3012	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3013	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3016	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3017	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3019	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3021	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3022	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3023	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3024	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3025	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3026	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3027	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3030_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3031_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3034_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3035_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3036_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3037_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3038_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3039_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3040_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3041_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3045	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3046	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3047	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3064	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3066	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3202	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3203	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3204	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3206	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3217	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3218	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3219	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3230	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3236	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D1002	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D2001	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3063	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3065	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3067	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D0254	0402-001019	DIODE-SCHOTTKY;MBRS340,40V,3000mA,DO-214	1	S.A	
....4	D2008	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3020	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3033_3H	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3048	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3049	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3050	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3051	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3052	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3074	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3070	0403-000258	DIODE-ZENER;BZX84C5V6,5.2-6V,225mW,SOT-2	1	S.A	
....4	D3216	0403-000607	DIODE-ZENER;VLZ16C,15.69/16.51V,500mW,SO	1	S.N.A	
....4	D3229	0403-000607	DIODE-ZENER;VLZ16C,15.69/16.51V,500mW,SO	1	S.N.A	
....4	D3002	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3015	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3029_3H	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3042	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3001	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3014	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3028_3H	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3208	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D5201	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D1005	0403-001425	DIODE-ZENER;BZX84C33,31-35V,350mW,SOT-23	1	S.A	
....4	D0254	0404-001271	DIODE-SCHOTTKY;SSA34,40V,3000mA,SMA,TP	1	S.A	
....4	D3053	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3054	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3055	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3056	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3057	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3058	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3068	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3069	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3212_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3213	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3214_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3215	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3220	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3221	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3222_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3223	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3224	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3225	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3226	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3227_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3228_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3231	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3232	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3233	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3237	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3238	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3239	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3240	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D2013	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D3071	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D3072	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7201	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7202	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7203	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7204	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7205	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7206	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	Q7001	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,	1	S.A	
....4	Q7002	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,	1	S.A	
....4	Q7402	0501-000434	TR-SMALL SIGNAL;KTC3875S-GR,NPN,150mW,SO	1	S.A	
....4	Q1001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2002	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2003	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q2004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3006	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3207	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3208	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5002	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5201	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5202	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q6003_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2005	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q2006	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q3202	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q3205	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q1004_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3201	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3203	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3204	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3206	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001165	FET-SILICON;SI3443BDV,P,-20V,+-4.4A,65mo	1	S.A	
....4	Q409	0505-001170	FET-SILICON;SI9933ADY-T1,P,-20V,3.4A,0.0	1	S.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002432	IC-CMOS LOGIC;74LVC244,8BIT BUFFER/DRIVE	1	S.N.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-003239	IC-CMOS LOGIC;74LVC1G00,2-input NAND Gat	1	S.A	
....4	IC104	0801-003239	IC-CMOS LOGIC;74LVC1G00,2-input NAND Gat	1	S.A	
....4	IC2002	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC5203	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC106	1001-001082	IC-VIDEO SWITCH;BA7657F,-,SOP,24P,300MIL	1	S.A	
....4	IC3011	1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	1	S.A	
....4	IC106	1001-001440	IC-VIDEO SWITCH;SiI9185CTU,QFP,80P,3.3V,	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC110	1006-001076	IC-DRIVER/RECEIVER;MAX232ECWE+T,SOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC112	1103-001410	IC-EEPROM;S-24CS08AFJ-TB-1GE,8Kbit,1Kx8,	1	S.A	
....4	IC113	1105-001712	IC-DRAM;HYB25D256163CE,DDR,256Mbit,16Mx1	1	S.A	
....4	IC5201	1105-001838	IC-DDR SDRAM;EM6A9160TS0A-5G,DDR SDRAM,1	1	S.A	
....4	DU410	1201-000166	IC-OP AMP;LM358,SOP,ST,8P,150MIL,DUAL,10	1	S.A	
....4	DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	1	S.A	
....4	DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	1	S.A	
....4	T0085	1201-002487	IC-AUDIO AMP;MAX9728A,QFN,12P,3x3mm,DUAL	1	S.A	
....4	T0124	1201-002677	IC-POWER AMP;NTP3100,QFN56,56P,8x8mm,DUA	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002974	IC-POSI.FIXED REG.;AP1117D-25A,TO-252,3P	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	T0170	1203-003059	IC-SWITCH VOL. REG.;MP1583,SOIC,8P,4.9x3	1	S.A	
....4	IC7206	1203-003394	IC-POWER SUPERVISOR;MIC2544-1YM,SOP,8P,4	1	S.A	
....4	T0087	1203-003696	IC-POSI.FIXED REG.;NCP1117DT18T5G,DPAK,3	1	S.A	
....4	IC5002	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC2005	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC7402	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	T0087	1203-004816	IC-POSI.FIXED REG.;KIA78D015F,DPAK,3P,6.	1	S.A	
....4	IC118	1204-002779	IC-VIDEO PROCESS;S4LF122X01,PBGA,208P,17	1	S.A	
....4	IC7001	1204-002861	IC-DECODER;UPD61211GM-104-GAA-A,QFP,216P	1	S.A	
....4	IC5204	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC5205	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC5206	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC5207	1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	S.A	
....4	IC109	1205-003432	IC-LCD CONTROLLER;SEMS01,LQFP,256P,30x30	1	S.A	
....4	IC3012	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	IC3013	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	IC3014_3H	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	R110	2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000137	R-CHIP;2KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22KOHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000242	R-CHIP;1.5KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000287	R-CHIP;100OHM,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000287	R-CHIP;100OHM,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000539	R-CHIP;200ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001217	R-CHIP;82OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001217	R-CHIP;82OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001285	R-CHIP;5.6OHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6OHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6OHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6OHM,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001307	R-CHIP;180ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001307	R-CHIP;180ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001317	R-CHIP;910OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001317	R-CHIP;910OHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001333	R-CHIP;18KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001333	R-CHIP;18KOHM,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007297	R-CHIP;110ohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-007307	R-CHIP;150ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007319	R-CHIP;390OHM,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007791	R-CHIP;9.1KOHM,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007791	R-CHIP;9.1KOHM,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-008429	R-CHIP;499ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-008649	R-CHIP;220ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	RA5009	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5010	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5011	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5012	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5013	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5014	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA6007	2011-000686	R-NETWORK;56ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5021	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5022	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5023	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5201	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5202	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5203	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5204	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA5205	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7203	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7204	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5006	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6004_ FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6005_ FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6006_ FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA5001	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5002	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5003	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5004	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5015	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5024	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5025	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5030	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5031	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5034	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7009	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7010	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7011	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7012	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7209	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7001	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7002	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7003	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7004	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7005	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7006	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7007	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7008	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7205	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7210	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5005	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5007	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5008	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5016	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5017	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5018	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5019	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5020	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5026	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5027	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5028	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5029	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5032	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5033	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7201	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7202	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000357	C-CER,CHIP;0.15nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000975	C-CER,CHIP;47nF,10%,25V,X7R,TP,1608,-	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-005005	C-CER,CHIP;100nF,10%,16V,X7R,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005261	C-CER,CHIP;1000nF,10%,25V,X7R,3216	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005533	C-CER,CHIP;1000nF,20%,6.3V,X7R,TP,1608	1	S.A	
....4	C120	2203-005533	C-CER,CHIP;1000nF,20%,6.3V,X7R,TP,1608	1	S.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,1005	1	S.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006513	C-CER,CHIP;0.047NF,5%,50V,C0G,TP,1005	1	S.N.A	
....4	C120	2203-006513	C-CER,CHIP;0.047NF,5%,50V,C0G,TP,1005	1	S.N.A	
....4	C120	2203-006513	C-CER,CHIP;0.047NF,5%,50V,C0G,TP,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	
....4	C120	2203-006842	C-CER,CHIP;0.47nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C1015	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
....4	C3056	2402-001150	C-AL,SMD;47UF,20%,16V,-,TP,6.3X5.8MM	1	S.A	
....4	C1025	2402-001238	C-AL,SMD;1uF,20%,50V,HR,TP,4.3x4.3x5.2mm	1	S.A	
....4	C1005	2402-001257	C-AL,SMD;470uF,20%,16V,-,TP,8.3*10	1	S.A	
....4	C1039	2402-001257	C-AL,SMD;470uF,20%,16V,-,TP,8.3*10	1	S.A	
....4	C1010	2402-001259	C-AL,SMD;220uF,20%,16V,WT,REEL,8X10	1	S.A	
....4	C2014	2402-001330	C-AL,SMD;330uF,20%,25V,TP,10x10mm	1	S.N.A	
....4	T0052	2703-000125	INDUCTOR-SMD;10uH,10%,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000417	INDUCTOR-SMD;220uH,5%,3225	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001426	INDUCTOR-SMD;680uH,20%,7070	1	S.A	
....4	T0052	2703-001778	INDUCTOR-SMD;3.3uH,20%,3225	1	S.A	
....4	T0052	2703-002722	INDUCTOR-SMD;22uH,20%,12x12mm	1	S.A	
....4	L2001	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	L2002	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	X202	2801-003667	CRYSTAL-SMD;14.31818MHz,30ppm,28-AAN,16p	1	S.A	
....4	X202	2801-003954	CRYSTAL-SMD;27MHz,30ppm,28-AAN,16pF,50oh	1	S.A	
....4	F103	2901-001114	FILTER-EMI SMD;25VDC,2.0ADC,-,100nF,3.2x	1	S.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001278	BEAD-SMD;120ohm,1608,200mA,TP,169ohm/174	1	S.N.A	
....4	T0568	3301-001278	BEAD-SMD;120ohm,1608,200mA,TP,169ohm/174	1	S.N.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001393	BEAD-SMD;60ohm,3216,1500mA,TP,41ohm/40MH	1	S.N.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	JA3001	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	JA3002	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	CN6001_ FFC	3708-001150	CONNECTOR-FPC/FFC/PIC;30P,1mm,SMD-A,SN,Y	1	S.A	
....4	T0077	BN41-00981A	PCB MAIN;Coral iDTV Reverse,FR-4,4,1.6T,	1	S.N.A	
....4	M0018	BN97-02084A	ASSY MICOM;T-PERLDEUC-0010,N50A,2007.12.	1	S.N.A	
.....5	IC115	1107-001415	IC-FLASH MEMORY;29W320D,4Mx8/2Mx16Bit,TS	1	S.N.A	
....4	M0018	BN97-02084B	ASSY MICOM;T-CRL32PEUMD-0008.0,N50A,2007	1	S.N.A	
.....5	IC115	1107-001709	IC-FLASH MEMORY;MX25L1605A,16Mbit,2Mx8,S	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
...3	T0245	0202-001492	SOLDER-WIRE FLUX;HSE-02 LFM48 SR-34 S,-,	0.25	S.N.A	
0.1		BN91-02051A	ASSY SHIELD-AAN;LE26A456C1DXXC,N50A	1	S.N.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	6	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	4	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	1	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	4	S.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	1	S.N.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	6	S.N.A	
..2	M0081	6003-001439	SCREW-TAPTITE;BH,+,-,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BH39-00362B	LEAD CONNECTOR;RE32**,UL1007#26,5P,150mm	1	S.A	
..2	M2893	BN39-00802A	LEAD CONNECTOR;LE32R86BDX,UL1007#26,UL/C	1	S.A	
..2	T0764	BN44-00214A	SMPS-LCDTV;MK32P5B,DYREL,AC/DC,137W,AC10	1	S.A	
..2	M0146	BN61-02207A	BRACKET-PANEL SIDE;Bordeaux 26,SECC,T1.2	2	S.N.A	
..2	M0114	BN61-02500A	HOLDER-WIRE;NYLON6.6,NATURAL	3	S.N.A	
..2	M0115	BN61-02947A	BRACKET-STAND LINK;JASMINE 32",SECC,T1.6	1	S.A	
..2	M0254	BN61-03699A	HOLDER-SIDE AV;32L450,EO,HIPS,V0,-,-,-,B	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
..2	M0107	BN63-03039A	SHIELD-COVER;MURANO40,PCM,T0.5,IDTV	1	S.N.A	
..2	M0125	BN96-05490A	ASSY INLET P;LE52M87BDX,XEC,300,300,150m	1	S.A	
..2	T0447	BN96-06957A	ASSY BRACKET P-PANEL;26A450C,SECC,T1.0,C	1	S.N.A	
...3	M0146	BN61-03682A	BRACKET-PANEL TOP;L450 26INCH,SECC,T1.0	1	S.N.A	
...3		BN61-03687A	BRACKET-PANEL BOTTOM;L450 26INCH,SECC,T1	1	S.N.A	
...3		BN61-03688A	BRACKET-GUIDE MAIN;L450 26INCH,SECC,T1.0	1	S.N.A	
...3		BN61-03690A	BRACKET-GUIDE POWER;L450 26INCH,SECC,T1.	1	S.N.A	
...3		BN61-03694A	BRACKET-GUIDE POWER;L450 26INCH,SECC,T1.	1	S.N.A	
...3	M0131	BN63-03370A	GASKET;LE37M86BDX,Conductive Fabric,10,7	1	S.N.A	
...3	M0131	BN63-03392A	GASKET;BORDEAUX PLUS,Conductive Fabric,1	2	S.N.A	
..2	M0214	BN96-07158D	ASSY CABLE P-FLAT;CORAL,FFC CABLE,196mm,	1	S.A	
..2	M2893	BN39-00603B	LEAD CONNECTOR;RE32**,UL1007#26,14P,200m	1	S.A	
0.1		BN91-02064A	ASSY LCD-AUO;LE26A456C1DXXC	1	S.N.A	
..2	M0215	BN07-00510A	LCD-PANEL;T260XW02 VL	1	S.A	
0.1	M0003	BN92-03167B	ASSY BOX;26L450,EO,,C1	1	S.N.A	
..2		BN69-02285D	BOX-SET;L450-26,CB,DY-01,A,YEL,A1,EUROPE	1	S.N.A	
0.1	M0019	BN92-03280A	ASSY LABEL;LE26A456C1DXXC,N50A	1	S.N.A	
0.1	M0045	BN92-03322A	ASSY ACCESSORY;LE26A456C1XXC	1	S.N.A	
..2	M0045	BN96-07319A	ASSY ACCESSORY-MANUAL;LE26A456C1DXXC	1	S.A	
...3	T0210	AA68-03242K	MANUAL FLYER-01,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	ACCESSORY	AA68-03575A	MANUAL FLYER-02,REGISTRATION C;XEU,ENG,U	1	S.N.A	
...3	ACCESSORY	AA68-03575B	MANUAL FLYER-02,REGISTRATION C;XEG,GERMA	1	S.N.A	
...3	ACCESSORY	AA68-03575C	MANUAL FLYER-02,REGISTRATION C;XEF,FRENC	1	S.N.A	
...3	ACCESSORY	AA68-03575D	MANUAL FLYER-03,REGISTRATION C;XEC,SPANI	1	S.N.A	
...3	ACCESSORY	AA68-03575E	MANUAL FLYER-04,REGISTRATION C;XET,ITALY	1	S.N.A	
...3	ACCESSORY	AA68-03575F	MANUAL FLYER-02,REGISTRATION C;XEN,DUTCH	1	S.N.A	
...3	ACCESSORY	AA68-03575G	MANUAL FLYER-02,REGISTRATION C;XEP,PORTU	1	S.N.A	
...3	ACCESSORY	BN68-00514E	MANUAL FLYER-00,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3	T0511	BN68-01424A	MANUAL USERS;COMM,SAMSUNG,8Langs,W.Europ	1	S.N.A	
...3	T0091	HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	0.05	S.N.A	
..2	M0045	BN96-07319B	ASSY ACCESSORY-CABEL;LE26A456C1DXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.A	
...3	T0074	BN59-00684A	REMOCON;TM-96B,49,EUROPE_DTV-450	1	S.A	
...3	ACCESSORY	BN63-01798A	CLOTH-CLEAN;RE40**,CLOTH,180,200,RHCM	1	S.N.A	
...3	T0531	BN63-04269B	COVER-BOTTOM;22,26,32L450,HIPS,HB,BK500	1	S.N.A	
...3	T0091	HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	0.05	S.N.A	
0.1	M0113	BN92-03173B	ASSY P/MATERIAL;26L450,W/W	1	S.N.A	
..2	T0524	6902-000358	BAG PE;HDPE/NITRON,T0.015/T0.5,W900,L700	1	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	1.81	S.N.A	
....4	C2741_LCD	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	

5-6. LE32A45*C** Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE32A456C2DXXC	LE32A456C2D,N50A/32AC2-GCR,32,LCD-TV,SPA			
0.1	M0001	BN90-01501K	ASSY COVER FRONT;LE32A456C2DXXH	1	S.N.A	
..2	T0003	BN96-06784K	ASSY COVER P-FRONT;32L456,EO(iDTV),Squar	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.A	
...3		BN61-03261B	BOSS-TAPE;Tulip,ACRYL,T1.1,W20mm,GRAY,TA	0.57	S.N.A	
...3		BN61-03675B	HOLDER-BOSS BOTTOM;32L450,EO,HIPS,HB,-,-	1	S.N.A	
...3	CCM1	BN63-02183D	COVER-SHEET;Rhcm,PE Vinyl,T0.05,680mm,20	0.74	S.N.A	
...3	M0112	BN63-04166E	COVER-FRONT;32L450,EO(iDTV),ABS+PMMA,-,-	1	S.N.A	
...3	T0059	BN64-00379A	INDICATOR LED;ROME-II,23,PC,CLEAR	1	S.N.A	
...3	T0061	BN64-00453A	WINDOW-REMOCON;32R71,PC,VIOLET,DIFFUSER(	1	S.N.A	
...3	T0022	BN64-00755A	KNOB-CONTROL;32L450,ABS,V0,BK07	1	S.N.A	
...3		BN64-00793A	DECORATION-BOTTOM;L450 32INCH,PC,-,-,-,-	1	S.N.A	
...3	M0145	BN96-07269A	ASSY BOARD P-FUNCTION;LN40A450C1D,CT5000	1	S.A	
...3	M0146	BN96-07270D	ASSY BOARD P-POWER & IR;LN32A450C1D,CT50	1	S.A	
...3	M0279	AA63-01637A	FELT;50P9,FELT,0.5,10,80	1	S.N.A	
...3	T0069	AA60-00171L	SPACER-FELT;46L3,FELT,460,T0.5,10	2	S.N.A	
...3	T0069	BP60-00015D	SPACER-FELT;617W,FELT,L760,T0.5,W10	2	S.N.A	
..2	T0175	BN96-06818C	ASSY SPEAKER P;8ohm,CORAL,L450,10W,550/3	1	S.A	
0.1	M0002	BN90-01577B	ASSY COVER REAR;32L450,EO(iDTV)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	11	S.A	
..2	M0013	BN96-07208B	ASSY COVER P-REAR;32L450,EO(iDTV),HIPS,H	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	4	S.A	
...3	T0101	BN61-03348A	BRACKET-WALL;LCD TV 32,SECC T1.2,-,-,-,-	4	S.N.A	
...3	M0006	BN63-04245B	COVER-REAR;32L450,EO(iDTV),HIPS,HB,BK500	1	S.N.A	
...3	T0071	BN64-00758A	INLAY-TERMINAL;26,32,37L450,PS SHEET,T0.	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
0.1	M0216	BN90-01580A	ASSY STAND;32L450,W/W	1	S.N.A	
..2	T0524	6902-000241	BAG PE;HDPE/NITRON,T0.5/T0.012,W600,L600	1	S.N.A	
..2	M0027	BN96-07211A	ASSY STAND P-BASE;32L450,W/W,ABS+PMMA,HB	1	S.A	
...3	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.A	
...3	M0081	6003-001239	SCREW-TAPTITE;FH,+,-,B,M4,L10,ZPC(WHT),S	4	S.A	
...3		BN61-02232A	HOLDER-SWIVEL RING;32R71,ACETAL NATUAL,N	1	S.N.A	
...3		BN61-02233A	HOLDER-SWIVEL RING;32R71,ACETAL NATUAL,N	1	S.N.A	
...3		BN61-02236A	BRACKET-HINGE SWIVEL;BORDEAUX 32,SECC,T1	1	S.N.A	
...3		BN61-02942A	BRACKET-STAND BOTTOM;32,BORDEAUX PLUS,SE	1	S.N.A	
...3	T0920	BN61-03679A	GUIDE-STAND;32L450,PC+GF 20%,-,-,-,BK500	1	S.N.A	
...3	CCM1	BN63-02183D	COVER-SHEET;Rhcm,PE Vinyl,T0.05,680mm,20	0.4	S.N.A	
...3	T0004	BN63-03102A	COVER-STAND BASE;32R81,ABS+PMMA,-,-,-,HB	1	S.N.A	
...3	M0126	BN73-00052C	RUBBER-FOOT;LCD TV,CR RUBBER,T2.0 DIA19,	4	S.N.A	
0.1	M0017	BN91-02045F	ASSY CHASSIS;LE32A457C1DXXC	1	S.N.A	
..2	M0014	BN94-01967E	ASSY PCB MAIN-AMLCD VE;LE32A457C1DXXC	1	S.A	
...3		0202-001557	SOLDER-CREAM;LST57-A,D38-63,42SN/57BI/1A	11	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	T0245	0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	S.N.A	
...3	JA3003_3H	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	JA3004	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	JA7201_OP	3709-001508	CONNECTOR-CARD SLOT;68P,1.27mm,PIN,PCMCI	1	S.A	
...3	CN330	3711-000012	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5MM,ST	1	S.A	
...3	CN330	3711-003846	HEADER-BOARD TO CABLE;BOX,8P,1R,2mm,ANGL	1	S.A	
...3	CN330	3711-004379	HEADER-BOARD TO CABLE;BOX,4P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-004484	HEADER-BOARD TO CABLE;BOX,5P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-004484	HEADER-BOARD TO CABLE;BOX,5P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-004712	HEADER-BOARD TO CABLE;BOX,9P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-005842	HEADER-BOARD TO CABLE;BOX,24P,2R,2MM,STR	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN3214	3722-002275	JACK-DIN;4P,-,SN,BLK,-	1	S.A	
...3	JA3204	3722-002680	JACK-EAR PHONE;6P,NiSn,BLK,ANGLE	1	S.A	
...3	JA3201	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002704	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	M0107	BN63-01847A	SHIELD-COVER;ROME,SPTE,T0.3,49.5,79.5,HE	1	S.N.A	
...3	M0107	BN63-04527A	SHIELD-COVER;450 EO,SPTE,T0.3,PAL REFLE	1	S.N.A	
...3	HDCP	BN97-00688A	ASSY HDCP;BN46-00018A,PS-42V6S,D73A,GENE	1	S.N.A	
....4		BN46-00018A	KEY CODE-CERTIFICATE;(HDCP KEY)PPM42M5S,	1	S.N.A	
...3		BN97-02356E	ASSY SMD-AMLCD VE;LE32A457C1DXXC	1	S.N.A	
....4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,-,D20~45um,96.5Sn/	2.772	S.N.A	
....4	D2002	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2003	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2004	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2009	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2012	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2019	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D3244	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D1004	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3003	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3004	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3006	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3007	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3009	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3011	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3012	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3013	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3016	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3017	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3019	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3021	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3022	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3023	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3024	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3025	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3026	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3027	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3030_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3031_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3034_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3035_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3036_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3037_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3038_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3039_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3040_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3041_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3045	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3046	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3047	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3064	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3066	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3202	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3203	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3204	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3206	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3217	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3218	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3219	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3230	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3236	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D1002	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D2001	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3063	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3065	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3067	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3077	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3079	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3080_3H	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D2008	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3020	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3033_3H	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3048	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3049	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3050	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3051	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3052	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3074	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3070	0403-000258	DIODE-ZENER;BZX84C5V6,5.2-6V,225mW,SOT-2	1	S.A	
....4	D3216	0403-000607	DIODE-ZENER;VLZ16C,15.69/16.51V,500mW,SO	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3229	0403-000607	DIODE-ZENER;VLZ16C,15.69/16.51V,500mW,SO	1	S.A	
....4	D3002	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3015	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3029_3H	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3042	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D5002	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3001	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3014	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3028_3H	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3208	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D5201	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D1005	0403-001425	DIODE-ZENER;BZX84C33,31-35V,350mW,SOT-23	1	S.A	
....4	D0254	0404-001271	DIODE-SCHOTTKY;SSA34,40V,3000mA,SMA,TP	1	S.A	
....4	D3053	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3054	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3055	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3056	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3057	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3058	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3068	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3069	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3212_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3213	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3214_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3215	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3220	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3221	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3222_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3223	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3224	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3225	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3226	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3227_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3228_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3231	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3232	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3233	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3237	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3238	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3239	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3240	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D2013	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D3071	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D3072	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7201	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7202	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7203	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7204	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7205	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7206	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	Q7001	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q7002	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,	1	S.A	
....4	Q7402	0501-000434	TR-SMALL SIGNAL;KTC3875S-GR,NPN,150mW,SO	1	S.A	
....4	Q1001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2002	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2003	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3006	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3207	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3208	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5002	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5201	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5202	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q6003_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2005	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q2006	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q3202	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q3205	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q1004_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3201	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3203	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3204	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3206	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001165	FET-SILICON;SI3443BDV,P,-20V,+-4.4A,65mo	1	S.A	
....4	Q409	0505-001170	FET-SILICON;SI9933ADY-T1,P,-20V,3.4A,0.0	1	S.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002432	IC-CMOS LOGIC;74LVC244,8BIT BUFFER/DRIVE	1	S.N.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-002633	IC-CMOS LOGIC;7WBD3125,2bit BUS SWITCH,S	1	S.A	
....4	IC104	0801-002633	IC-CMOS LOGIC;7WBD3125,2bit BUS SWITCH,S	1	S.A	
....4	IC104	0801-002633	IC-CMOS LOGIC;7WBD3125,2bit BUS SWITCH,S	1	S.A	
....4	IC104	0801-002633	IC-CMOS LOGIC;7WBD3125,2bit BUS SWITCH,S	1	S.A	
....4	IC104	0801-003239	IC-CMOS LOGIC;74LVC1G00,2-input NAND Gat	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	IC104	0801-003239	IC-CMOS LOGIC;74LVC1G00,2-input NAND Gat	1	S.A	
....4	IC2002	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC5203	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC106	1001-001082	IC-VIDEO SWITCH;BA7657F,-,SOP,24P,300MIL	1	S.A	
....4	IC3011	1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	1	S.A	
....4	IC106	1001-001440	IC-VIDEO SWITCH;SiI9185CTU,QFP,80P,3.3V,	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC110	1006-001076	IC-DRIVER/RECEIVER;MAX232ECWE+T,SOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC112	1103-001410	IC-EEPROM;S-24CS08AFJ-TB-1GE,8Kbit,1Kx8,	1	S.A	
....4	IC113	1105-001712	IC-DRAM;HYB25D256163CE,DDR,256Mbit,16Mx1	1	S.A	
....4	IC5201	1105-001838	IC-DDR SDRAM;EM6A9160TS0A-5G,DDR SDRAM,1	1	S.A	
....4	DU410	1201-000166	IC-OP AMP;LM358,SOP,ST,8P,150MIL,DUAL,10	1	S.A	
....4	DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	1	S.A	
....4	DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	1	S.A	
....4	T0085	1201-002487	IC-AUDIO AMP;MAX9728A,QFN,12P,3x3mm,DUAL	1	S.A	
....4	T0124	1201-002677	IC-POWER AMP;NTP3100,QFN56,56P,8x8mm,DUA	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002974	IC-POSI.FIXED REG.;AP1117D-25A,TO-252,3P	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	T0170	1203-003059	IC-SWITCH VOL. REG.;MP1583,SOIC,8P,4.9x3	1	S.A	
....4	IC7206	1203-003394	IC-POWER SUPERVISOR;MIC2544-1YM,SOP,8P,4	1	S.A	
....4	T0087	1203-003696	IC-POSI.FIXED REG.;NCP1117DT18T5G,DPAK,3	1	S.A	
....4	IC5002	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC2005	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC7402	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	T0087	1203-004816	IC-POSI.FIXED REG.;KIA78D015F,DPAK,3P,6.	1	S.A	
....4	IC118	1204-002779	IC-VIDEO PROCESS;S4LF122X01,PBGA,208P,17	1	S.A	
....4	IC7001	1204-002861	IC-DECODER;UPD61211GM-104-GAA-A,QFP,216P	1	S.A	
....4	IC109	1205-003432	IC-LCD CONTROLLER;SEMS01,LQFP,256P,30x30	1	S.A	
....4	IC3012	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	IC3013	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	IC3014_3H	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	R110	2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000242	R-CHIP;1.5Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000539	R-CHIP;200ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001217	R-CHIP;82ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001217	R-CHIP;82ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001307	R-CHIP;180ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001307	R-CHIP;180ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001317	R-CHIP;910ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001317	R-CHIP;910ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002796	R-CHIP;510ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007141	R-CHIP;240ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007297	R-CHIP;110ohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007307	R-CHIP;150ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007319	R-CHIP;390ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007791	R-CHIP;9.1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007791	R-CHIP;9.1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-008429	R-CHIP;499ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-008649	R-CHIP;220ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-008649	R-CHIP;220ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	RA5009	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5010	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5011	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5012	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5013	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5014	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA6007	2011-000686	R-NETWORK;56ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5021	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5022	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5023	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5201	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5202	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5203	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5204	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5205	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7203	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7204	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5006	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6004_FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6005_FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6006_FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA5001	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5002	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5003	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5004	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5015	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5024	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5025	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5030	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5031	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5034	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7009	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7010	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7011	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7012	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA7209	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7001	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7002	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7003	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7004	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7005	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7006	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7007	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7008	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7205	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7210	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5005	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5007	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5008	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5016	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5017	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5018	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5019	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5020	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5026	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5027	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5028	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5029	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5032	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5033	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7201	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7202	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000357	C-CER,CHIP;0.15nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000975	C-CER,CHIP;47nF,10%,25V,X7R,TP,1608,-	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-005005	C-CER,CHIP;100nF,10%,16V,X7R,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005261	C-CER,CHIP;1000nF,10%,25V,X7R,3216	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005533	C-CER,CHIP;1000nF,20%,6.3V,X7R,TP,1608	1	S.A	
....4	C120	2203-005533	C-CER,CHIP;1000nF,20%,6.3V,X7R,TP,1608	1	S.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,1005	1	S.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006513	C-CER,CHIP;0.047NF,5%,50V,C0G,TP,1005	1	S.N.A	
....4	C120	2203-006513	C-CER,CHIP;0.047NF,5%,50V,C0G,TP,1005	1	S.N.A	
....4	C120	2203-006513	C-CER,CHIP;0.047NF,5%,50V,C0G,TP,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,1005	1	S.N.A	
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C1015	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
....4	C3056	2402-001150	C-AL,SMD;47UF,20%,16V,-,TP,6.3X5.8MM	1	S.A	
....4	C1025	2402-001238	C-AL,SMD;1uF,20%,50V,HR,TP,4.3x4.3x5.2mm	1	S.A	
....4	C1005	2402-001257	C-AL,SMD;470uF,20%,16V,-,TP,8.3*10	1	S.A	
....4	C1039	2402-001257	C-AL,SMD;470uF,20%,16V,-,TP,8.3*10	1	S.A	
....4	C1010	2402-001259	C-AL,SMD;220uF,20%,16V,WT,REEL,8X10	1	S.A	
....4	C2014	2402-001330	C-AL,SMD;330uF,20%,25V,TP,10x10mm	1	S.N.A	
....4	T0052	2703-000125	INDUCTOR-SMD;10uH,10%,2012	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000417	INDUCTOR-SMD;220uH,5%,3225	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001426	INDUCTOR-SMD;680uH,20%,7070	1	S.A	
....4	T0052	2703-001778	INDUCTOR-SMD;3.3uH,20%,3225	1	S.A	
....4	T0052	2703-002722	INDUCTOR-SMD;22uH,20%,12x12mm	1	S.A	
....4	L2001	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	L2002	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	X202	2801-003667	CRYSTAL-SMD;14.31818MHz,30ppm,28-AAN,16p	1	S.A	
....4	X202	2801-003954	CRYSTAL-SMD;27MHz,30ppm,28-AAN,16pF,50oh	1	S.A	
....4	F103	2901-001114	FILTER-EMI SMD;25VDC,2.0ADC,-,100nF,3.2x	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001278	BEAD-SMD;120ohm,1608,200mA,TP,169ohm/174	1	S.N.A	
....4	T0568	3301-001278	BEAD-SMD;120ohm,1608,200mA,TP,169ohm/174	1	S.N.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001393	BEAD-SMD;60ohm,3216,1500mA,TP,41ohm/40MH	1	S.N.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001412	BEAD-SMD;60ohm,2012,800mA,TP,65ohm/110MH	1	S.N.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	JA3001	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	JA3002	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	CN6001_FFC	3708-001150	CONNECTOR-FPC/FFC/PIC;30P,1mm,SMD-A,SN,Y	1	S.A	
....4	T0077	BN41-00981B	PCB MAIN;Coral iDTV Reverse,FR-4,4,1.6T,	1	S.N.A	
....4	M0018	BN97-02084A	ASSY MICOM;T-PERLDEUC-1011.0,N50A/L330/4	1	S.N.A	
.....5	IC115	1107-001415	IC-FLASH MEMORY;29W320D,4Mx8/2Mx16Bit,TS	1	S.N.A	
....4	M0018	BN97-02084B	ASSY MICOM;T-CRL32PEUMD-1006.0,N50A,2007	1	S.N.A	
.....5	IC115	1107-001709	IC-FLASH MEMORY;MX25L1605A,16Mbit,2Mx8,S	1	S.N.A	
....4	D0254	0402-001019	DIODE-SCHOTTKY;MBRS340,40V,3000mA,DO-214	1	S.A	
...3	CIS3	BN40-00124A	TUNER;DNOS403SH071A(S),DNOS403SH071A(S),	1	S.A	
0.1		BN91-02052E	ASSY SHIELD-SSD;LE32A457C1DXX*	1	S.N.A	
..2		BN81-01805A	A/S-TAPE FILAMENT;ELMATIT,T0.1,W49,L1200	0.15	S.N.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	6	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	1	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	6	S.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	8	S.A	
..2	M0081	6003-001439	SCREW-TAPTITE;BH,+,-,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BH39-00362B	LEAD CONNECTOR;RE32**,UL1007#26,5P,150mm	1	S.A	
..2	M2893	BN39-00603A	LEAD CONNECTOR;RE40**,UL1007#26,UL,14P,2	1	S.A	
..2	M0258	BN39-00615Q	CBF HARNESS-INLET SOCKET;LN40A450C1D,UL1	1	S.A	
..2	M2893	BN39-00802B	LEAD CONNECTOR;LE40R86BDX,UL1007#26,24PI	1	S.A	
..2	M0115	BN61-02947A	BRACKET-STAND LINK;JASMINE 32",SECC,T1.6	1	S.N.A	
..2	M0146	BN61-03265A	BRACKET-PANEL SIDE;JASMINE,SECC 1.2,AMLC	3	S.N.A	
..2	M0254	BN61-03699A	HOLDER-SIDE AV;32L450,EO,HIPS,V0,-,-,-,B	1	S.N.A	
..2	M0107	BN63-03039A	SHIELD-COVER;MURANO40,PCM,T0.5,IDTV	1	S.N.A	
..2	T0447	BN96-06958A	ASSY BRACKET P-PANEL;32L450,AM,CMO,AUO,G	1	S.N.A	
...3	M0131	AA63-01236A	GASKET;FIRENZE,Conductive Fabric,3mm,12m	1	S.N.A	
...3	M0131	AA63-01401A	GASKET;LE40R71BX,Conductive Fabric,22mm,	2	S.N.A	
...3	M0131	AA63-01437A	GASKET;Bordeaux,Conductive Fabric,20mm,9	1	S.N.A	
...3	M0146	BN61-03678A	BRACKET-PANEL TOP;32L450,GPSP,T1.0	1	S.N.A	
...3		BN61-03683A	BRACKET-GUIDE MAIN;L450 32INCH,GPSP,T1.0	1	S.N.A	
...3		BN61-03685A	BRACKET-PANEL BOTTOM;L450 32INCH,GPSP,T1	1	S.N.A	
...3		BN61-03686A	BRACKET-GUIDE POWER;L450 32INCH,gpsp,T1.	1	S.N.A	
...3		BN61-03691A	BRACKET-GUIDE POWER;L450 32INCH,gpsp,T1.	1	S.N.A	
...3	M0114	BN61-02500A	HOLDER-WIRE;NYLON6.6,NATURAL	5	S.N.A	
...3	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	6	S.A	
...3	M0114	BP61-01088A	HOLDER-WIRE;SVP-42L6,NYLON	1	S.N.A	
..2	M0214	BN96-07158A	ASSY CABLE P-FLAT;CORAL,FFC CABLE,225mm,	1	S.A	
..2	T0764	BN44-00214A	SMPS-LCDTV;MK32P5B,DYREL,AC/DC,137W,AC10	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
0.1		BN91-02064F	ASSY LCD-AMLCD;LE32A457C1DXXC	1	S.N.A	
..2	M0215	BN07-00538A	LCD-PANEL;LTF320AB01	1	S.A	
0.1	M0003	BN92-03168K	ASSY BOX;LE32A456C2DXXH	1	S.N.A	
..2		BN69-02606R	BOX-SET;32L450,CB,A-01,DW-75,YEL,-,-,-,-	1	S.N.A	
0.1	M0113	BN92-03174B	ASSY P/MATERIAL;32L450,W/W	1	S.N.A	
..2	T0524	6902-000519	BAG PE;HDPE/NITRON,T0.015/T0.05(DOUBLE),	1	S.N.A	
..2	T0081	HA83-00057B	LP-TAPE-CELLULOSE;,HA02-030010,T0,046,W7	2.1	S.N.A	
..2		AA01-00004A	FOIL;2000,2000,NTR,SEH	0.083	S.N.A	
..2	T0376	BH69-00260A	BAG AIR;LDPE,0.2,1000,1800,NATURAL,-,-,-	0.006	S.N.A	
..2		HA83-00056A	LP-COVER;0.0001,WHT,STRECH FOIL	0.001	S.N.A	
0.1	M0019	BN92-03280F	ASSY LABEL;LE26A456C2CXXE	1	S.N.A	
0.1	M0045	BN92-03322B	ASSY ACCESSORY;LE32A456C1DXXC	1	S.A	
..2	M0045	BN96-07319A	ASSY ACCESSORY-MANUAL;LE26A456C1DXXC	1	S.A	
...3	T0511	BN68-01424A	MANUAL USERS;COMM,SAMSUNG,8Langs,W.Europ	1	S.N.A	
...3		AA68-03242K	MANUAL FLYER-02,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	T0175	BN68-00514E	MANUAL FLYER-01,WARRANTY CARD;comm,Samsu	1	S.N.A	
..2	M0045	BN96-07319C	ASSY ACCESSORY-CABLE;LE32A456C1DXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.A	
...3	T0074	BN59-00684A	REMOCON;TM-96B,49,EUROPE_DTV-450	1	S.A	
...3		BN63-01798A	CLOTH-CLEAN;RE40**,CLOTH,180,200,RHCM	1	S.N.A	
...3	T0531	BN63-04269B	COVER-BOTTOM;22,26,32L450,HIPS,HB,BK500	1	S.N.A	
0.1	M0590	BN81-01705A	AS-T-CON BOARD;LTF320AB01-A01,00538A,-,-	1	S.A	
0.1	M0059	BN81-01776A	AS-INVERTER BOARD;LTF320AB01-A,BN07-0053	1	S.A	

5-7. LE37A45*C** Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE37A456C2DXXC	LE37A456C2D,N50A/37AC2-GCR,37,LCD-TV,SPA			
0.1	M0001	BN90-01502H	ASSY COVER FRONT;LE37A456C2DXXH	1	S.N.A	
..2	T0003	BN96-06785H	ASSY COVER P-FRONT;37L450,EO(iDTV),Squar	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.A	
...3		BN61-03261B	BOSS-TAPE;Tulip,ACRYL,T1.1,W20mm,GRAY,TA	0.74	S.N.A	
...3		BN61-03677B	HOLDER-BOSS BOTTOM;37,40L450,EO,HIPS,HB,	1	S.N.A	
...3	CCM1	BN63-02183D	COVER-SHEET;Rhcm,PE Vinyl,T0.05,680mm,20	0.992	S.N.A	
...3	M0112	BN63-04169D	COVER-FRONT;37L450,EO(iDTV),ABS+PMMA,-,-	1	S.N.A	
...3	T0059	BN64-00379A	INDICATOR LED;ROME-II,23,PC,CLEAR	1	S.N.A	
...3	T0061	BN64-00453A	WINDOW-REMOCON;32R71,PC,VIOLET,DIFFUSER(	1	S.N.A	
...3	T0022	BN64-00755A	KNOB-CONTROL;32L450,ABS,V0,BK07	1	S.N.A	
...3		BN64-00794A	DECORATION-BOTTOM;L450 37INCH,PC,-,-,-,-	1	S.N.A	
...3	M0145	BN96-07269A	ASSY BOARD P-FUNCTION;LN40A450C1D,CT5000	1	S.A	
...3	M0146	BN96-07270D	ASSY BOARD P-POWER & IR;LN32A450C1D,CT50	1	S.A	
...3	M0279	AA63-01637A	FELT;50P9,FELT,0.5,10,80	1	S.N.A	
...3	T0069	AA60-00171L	SPACER-FELT;46L3,FELT,460,T0.5,10	2	S.N.A	
...3	TOP/BOT	BN63-02224A	FELT-VIBRATION;63P5,FELT,T0.5,850,10	2	S.N.A	
..2	T0175	BN96-06818C	ASSY SPEAKER P;8ohm,CORAL,L450,10W,550/3	1	S.A	
0.1	M0216	BN90-01575A	ASSY STAND;37L450,W/W	1	S.N.A	
..2	M0027	BN96-06259A	ASSY STAND P-BASE;37,40L450,,ABS+PMMA,HB	1	S.A	
...3	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.A	
...3	M0081	6003-001239	SCREW-TAPTITE;FH,+,-,B,M4,L10,ZPC(WHT),S	8	S.A	
...3		BN61-02248A	HOLDER-SWIVEL RING;40R71,ACETAL NATUAL,T	1	S.N.A	
...3		BN61-02883A	BRACKET-STAND BOTTOM;BORDEAUX PLUS,40,SE	1	S.N.A	
...3		BN61-02885A	HOLDER-SWIVEL RING;MURANO40,ACETAL NATUR	1	S.N.A	
...3		BN61-02886A	BRACKET-HINGE SWIVEL;BORDEAUX PLUS,40,SE	1	S.N.A	
...3	T0920	BN61-03681A	GUIDE-STAND;40L450,PC+GF 20%,-,-,-,BK500	1	S.N.A	
...3	CCM1	BN63-02183D	COVER-SHEET;Rhcm,PE Vinyl,T0.05,680mm,20	0.5	S.N.A	
...3	T0004	BN63-03030A	COVER-STAND BASE;40R81,ABS+PMMA,-,-,-,HB	1	S.N.A	
...3	M0126	BN73-00052C	RUBBER-FOOT;LCD TV,CR RUBBER,T2.0 DIA19,	4	S.N.A	
..2	M0081	6003-001324	SCREW-TAPTITE;BH,+,B,M4,L16,NI PLT,SWRCH	4	S.N.A	
0.1	M0002	BN90-01576B	ASSY COVER REAR;37L450,EO(iDTV)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	14	S.A	
..2	M0013	BN96-07207B	ASSY COVER P-REAR;37L450,EO(iDTV),HIPS,H	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.A	
...3	T0101	BN61-03348A	BRACKET-WALL;LCD TV 32,SECC T1.2,-,-,-,-	2	S.N.A	
...3	M0006	BN63-04246B	COVER-REAR;37L450,EO(iDTV),HIPS,HB,BK500	1	S.N.A	
...3	T0071	BN64-00758A	INLAY-TERMINAL;26,32,37L450,PS SHEET,T0.	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
0.1		BN91-01561C	ASSY LCD-CPT;LE37S67BDX/*	1	S.N.A	
..2	M0215	BN07-00446A	LCD-PANEL;CLAA370WA03SC	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
0.1		BN91-02793B	ASSY SHIELD-PRE;LE37A457C1DX*	1	S.N.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	6	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	1	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	6	S.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	9	S.A	
..2	M0081	6003-001334	SCREW-TAPTITE;BH,+,S,M4,L14,ZPC(BLK),SWR	6	S.N.A	
..2	M0081	6003-001439	SCREW-TAPTITE;BH,+,-,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BN39-00603G	LEAD CONNECTOR;RE26**AU,UL1007#26,14PIN,	1	S.A	
..2	M0258	BN39-00615Q	CBF HARNESS-INLET SOCKET;LN40A450C1D,UL1	1	S.A	
..2	M2893	BN39-00802G	LEAD CONNECTOR;SPD-63P71FHD,UL1617#22,24	1	S.A	
..2	M2893	BN39-00846A	LEAD CONNECTOR-LVDS;LE37S81BX,UL1571#30,	1	S.A	
..2	M2893	BN39-00915A	LEAD CONNECTOR;JASMINE,UL1007#26,UL/CSA,	1	S.A	
..2	T0764	BN44-00217A	SMPS-LCDTV;MK37P5B,SEM,AC/DC,171W,AC100	1	S.A	
..2	M0146	BN61-02419A	BRACKET-PANEL SIDE;SONOMA 32,SECC,T1.2,A	4	S.N.A	
..2	M0115	BN61-02882A	BRACKET-STAND LINK;TULIP,40,SECC,T1.6,-,	1	S.N.A	
..2	M0254	BN61-03699A	HOLDER-SIDE AV;32L450,EO,HIPS,V0,-,-,-,B	1	S.N.A	
..2	M0107	BN63-03039A	SHIELD-COVER;MURANO40,PCM,T0.5,IDTV	1	S.N.A	
..2		BN81-01805A	A/S-TAPE FILAMENT;ELMATIT,T0.1,W49,L1200	0.15	S.N.A	
..2	T0447	BN96-06959H	ASSY BRACKET P-PANEL;37L450,CPT(07),SECC	1	S.N.A	
...3	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	2	S.A	
...3	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	8	S.A	
...3	M0114	BN61-02500A	HOLDER-WIRE;NYLON6.6,NATURAL	5	S.N.A	
...3	M0146	BN61-03684B	BRACKET-PANEL TOP;L450 37INCH,SECC,T1.0	1	S.N.A	
...3		BN61-03689A	BRACKET-PANEL BOTTOM;L450 37INCH,SECC,T1	1	S.N.A	
...3		BN61-03692A	BRACKET-GUIDE MAIN;L450 37INCH,SECC,T1.0	1	S.N.A	
...3		BN61-03693A	BRACKET-GUIDE POWER;L450 37INCH,SECC,T1.	1	S.N.A	
...3		BN61-03696A	BRACKET-GUIDE POWER;L450 37INCH,SECC,T1.	2	S.N.A	
...3	T0101	BN61-03698A	BRACKET-WALL;L450 37INCH,SECC,T1.2	1	S.N.A	
...3	M0131	BN63-03370A	GASKET;LE37M86BDX,Conductive Fabric,10mm	1	S.N.A	
...3	M0131	BN63-03371A	GASKET;LE37M86BDX,Conductive Fabric,10mm	2	S.N.A	
...3	M0131	BN63-03504A	GASKET;JASMINE,Conductive Fabric,25mm,8m	2	S.N.A	
0.1	M0017	BN91-02795B	ASSY CHASSIS-CPT;LE37A457C1DX*	1	S.N.A	
..2	M0014	BN94-02229B	ASSY PCB MAIN-ACE;LE37A457C1DX*	1	S.A	
...3	SUB02	0202-001557	SOLDER-CREAM;LST57-A,D38-63,42SN/57BI/1A	11	S.N.A	
...3	T0245	0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	S.N.A	
...3	JA3003_3H	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
...3	JA3004	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
...3	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
...3	JA7201_OP	3709-001508	CONNECTOR-CARD SLOT;68P,1.27mm,PIN,PCMCI	1	S.A	
...3	CN330	3711-000012	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5MM,ST	1	S.A	
...3	CN330	3711-003846	HEADER-BOARD TO CABLE;BOX,8P,1R,2mm,ANGL	1	S.A	
...3	CN330	3711-006765	HEADER-BOARD TO CABLE;BOX,5P,1R,2mm,STRA	1	S.A	
...3	CN330	3711-006766	HEADER-BOARD TO CABLE;BOX,24P,2R,2mm,STR	1	S.A	
...3	CN330	3711-006767	HEADER-BOARD TO CABLE;BOX,30P,2R,2mm,STR	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
...3	CN3214	3722-002275	JACK-DIN;4P,-,SN,BLK,-	1	S.A	
...3	JA3204	3722-002680	JACK-EAR PHONE;6P,NiSn,BLK,ANGLE	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	JA3201	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
...3	JA333	3722-002704	JACK-PIN;3P,Sn,YEL/WHT/RED,ANGLE	1	S.A	
...3	CIS3	BN40-00124A	TUNER;DNOS403SH071A(S),DNOS403SH071A(S),	1	S.A	
...3	M0107	BN63-01847A	SHIELD-COVER;ROME,SPTE,T0.3,49.5,79.5,HE	1	S.N.A	
...3	M0107	BN63-04527A	SHIELD-COVER;450 EO,SPTE,T0.3,PAL REFLE	1	S.N.A	
...3	HDCP	BN97-00688A	ASSY HDCP;BN46-00018A,PS-42V6S,D73A,GENE	1	S.N.A	
....4		BN46-00018A	KEY CODE-CERTIFICATE;(HDCP KEY)PPM42M5S,	1	S.N.A	
...3		BN97-02676B	ASSY SMD-ACE;LE37A457C1DX*	1	S.N.A	
....4	SUB05	0202-001477	SOLDER-CREAM;LST309-M,-,D20~45um,96.5Sn/	2.772	S.N.A	
....4	D2002	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2003	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2004	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2009	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2012	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D2019	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D3244	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
....4	D1004	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3003	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3004	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3006	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3007	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3009	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3011	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3012	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3013	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3016	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3017	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3019	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3021	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3022	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3023	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3024	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3025	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3026	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3027	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3030_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3031_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3034_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3035_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3036_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3037_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3038_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3039_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3040_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3041_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3045	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3046	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3047	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3064	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3066	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3202	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3203	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3204	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3206	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3217	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3218	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3219	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3230	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D3236	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
....4	D1002	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D2001	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3063	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3065	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3067	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3077	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3079	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D3080_3H	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
....4	D0254	0402-001019	DIODE-SCHOTTKY;MBRS340,40V,3000mA,DO-214	1	S.A	
....4	D2008	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3020	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3033_3H	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3048	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3049	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3050	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3051	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3052	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3074	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D5001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
....4	D3070	0403-000258	DIODE-ZENER;BZX84C5V6,5.2-6V,225mW,SOT-2	1	S.A	
....4	D3216	0403-000607	DIODE-ZENER;VLZ16C,15.69/16.51V,500mW,SO	1	S.A	
....4	D3229	0403-000607	DIODE-ZENER;VLZ16C,15.69/16.51V,500mW,SO	1	S.A	
....4	D3002	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3015	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3029_3H	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3042	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D5002	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
....4	D3001	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3014	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3028_3H	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D3208	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D5201	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
....4	D1005	0403-001425	DIODE-ZENER;BZX84C33,31-35V,350mW,SOT-23	1	S.A	
....4	D0254	0404-001271	DIODE-SCHOTTKY;SSA34,40V,3000mA,SMA,TP	1	S.A	
....4	D3053	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	D3054	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3055	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3056	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3057	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3058	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3068	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3069	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3212_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3213	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3214_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3215	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3220	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3221	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3222_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3223	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3224	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3225	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3226	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3227_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3228_EU	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3231	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3232	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3233	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3237	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3238	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3239	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D3240	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
....4	D2013	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D3071	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D3072	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7201	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7202	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7203	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7204	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7205	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	D7206	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
....4	Q7001	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,	1	S.A	
....4	Q7002	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,	1	S.A	
....4	Q7402	0501-000434	TR-SMALL SIGNAL;KTC3875S-GR,NPN,150mW,SO	1	S.A	
....4	Q1001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q1002_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2002	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2003	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3006	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q3207	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	Q3208	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5002	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5201	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q5202	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q6003_LCD	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
....4	Q2005	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q2006	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q3202	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q3205	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
....4	Q1004_LCD	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3201	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3203	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3204	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q3206	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
....4	Q409	0505-001165	FET-SILICON;SI3443BDV,P,-20V,+-4.4A,65mo	1	S.A	
....4	Q409	0505-001170	FET-SILICON;SI9933ADY-T1,P,-20V,3.4A,0.0	1	S.A	
....4	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
....4	IC104	0801-002432	IC-CMOS LOGIC;74LVC244,8BIT BUFFER/DRIVE	1	S.N.A	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
....4	IC104	0801-002633	IC-CMOS LOGIC;7WBD3125,2bit BUS SWITCH,S	1	S.A	
....4	IC104	0801-002633	IC-CMOS LOGIC;7WBD3125,2bit BUS SWITCH,S	1	S.A	
....4	IC104	0801-002633	IC-CMOS LOGIC;7WBD3125,2bit BUS SWITCH,S	1	S.A	
....4	IC104	0801-002633	IC-CMOS LOGIC;7WBD3125,2bit BUS SWITCH,S	1	S.A	
....4	IC104	0801-003239	IC-CMOS LOGIC;74LVC1G00,2-input NAND Gat	1	S.A	
....4	IC104	0801-003239	IC-CMOS LOGIC;74LVC1G00,2-input NAND Gat	1	S.A	
....4	IC2002	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC5203	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
....4	IC106	1001-001082	IC-VIDEO SWITCH;BA7657F,-,SOP,24P,300MIL	1	S.A	
....4	IC3011	1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	1	S.A	
....4	IC106	1001-001440	IC-VIDEO SWITCH;SiI9185CTU,QFP,80P,3.3V,	1	S.A	
....4	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
....4	IC110	1006-001076	IC-DRIVER/RECEIVER;MAX232ECWE+T,SOP,16P,	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
....4	IC112	1103-001410	IC-EEPROM;S-24CS08AFJ-TB-1GE,8Kbit,1Kx8,	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	IC113	1105-001712	IC-DRAM;HYB25D256163CE,DDR,256Mbit,16Mx1	1	S.A	
....4	IC5201	1105-001838	IC-DDR SDRAM;EM6A9160TS0A-5G,DDR SDRAM,1	1	S.A	
....4	DU410	1201-000166	IC-OP AMP;LM358,SOP,ST,8P,150MIL,DUAL,10	1	S.A	
....4	DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	1	S.A	
....4	DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	1	S.A	
....4	T0085	1201-002487	IC-AUDIO AMP;MAX9728A,QFN,12P,3x3mm,DUAL	1	S.A	
....4	T0124	1201-002677	IC-POWER AMP;NTP3100,QFN56,56P,8x8mm,DUA	1	S.A	
....4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,-,PLA	1	S.A	
....4	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
....4	T0087	1203-002974	IC-POSI.FIXED REG.;AP1117D-25A,TO-252,3P	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
....4	T0170	1203-003059	IC-SWITCH VOL. REG.;MP1583,SOIC,8P,4.9x3	1	S.A	
....4	IC7206	1203-003394	IC-POWER SUPERVISOR;MIC2544-1YM,SOP,8P,4	1	S.A	
....4	T0087	1203-003696	IC-POSI.FIXED REG.;NCP1117DT18T5G,DPAK,3	1	S.A	
....4	IC5002	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
....4	IC2005	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	IC7402	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
....4	T0087	1203-004816	IC-POSI.FIXED REG.;KIA78D015F,DPAK,3P,6.	1	S.A	
....4	IC118	1204-002779	IC-VIDEO PROCESS;S4LF122X01,PBGA,208P,17	1	S.A	
....4	IC7001	1204-002861	IC-DECODER;UPD61211GM-104-GAA-A,QFP,216P	1	S.A	
....4	IC109	1205-003432	IC-LCD CONTROLLER;SEMS01,LQFP,256P,30x30	1	S.A	
....4	IC3012	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	IC3013	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	IC3014_3H	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
....4	R110	2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000141	R-CHIP;2.2

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000242	R-CHIP;1.5Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000539	R-CHIP;200ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
....4	R110	2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-001217	R-CHIP;82ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001217	R-CHIP;82ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001307	R-CHIP;180ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001307	R-CHIP;180ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001317	R-CHIP;910ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001317	R-CHIP;910ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002796	R-CHIP;510ohm,5%,1/16W,TP,1005	1	S.A	
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007141	R-CHIP;240ohm,5%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007297	R-CHIP;110ohm,1%,1/10W,TP,1608	1	S.A	
....4	R110	2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007307	R-CHIP;150ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007319	R-CHIP;390ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007791	R-CHIP;9.1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-007791	R-CHIP;9.1Kohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-008429	R-CHIP;499ohm,1%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	R110	2007-008649	R-CHIP;220ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	R110	2007-008649	R-CHIP;220ohm,1%,1/16W,TP,1005	1	S.N.A	
....4	RA5009	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5010	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5011	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5012	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5013	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5014	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA6007	2011-000686	R-NETWORK;56ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5021	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5022	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5023	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5201	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5202	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5203	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5204	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5205	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7203	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7204	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5006	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6004_FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6005_FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA6006_FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
....4	RA5001	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5002	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5003	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5004	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5015	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5024	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5025	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5030	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5031	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5034	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7009	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7010	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7011	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7012	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7209	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7001	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7002	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7003	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7004	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7005	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7006	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7007	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7008	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7205	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA7210	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
....4	RA5005	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5007	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5008	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	RA5016	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5017	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5018	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5019	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5020	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5026	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5027	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5028	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5029	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5032	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA5033	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7201	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	RA7202	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	S.A	
....4	C120	2203-000357	C-CER,CHIP;0.15nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,1005	1	S.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
....4	C120	2203-000975	C-CER,CHIP;47nF,10%,25V,X7R,TP,1608,-	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	1	S.N.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
....4	C120	2203-005005	C-CER,CHIP;100nF,10%,16V,X7R,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
....4	C120	2203-005261	C-CER,CHIP;1000nF,10%,25V,X7R,3216	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
....4	C120	2203-005533	C-CER,CHIP;1000nF,20%,6.3V,X7R,TP,1608	1	S.A	
....4	C120	2203-005533	C-CER,CHIP;1000nF,20%,6.3V,X7R,TP,1608	1	S.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,1005	1	S.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
....4	C120	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
....4	C1015	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
....4	C3056	2402-001150	C-AL,SMD;47UF,20%,16V,-,TP,6.3X5.8MM	1	S.A	
....4	C1025	2402-001238	C-AL,SMD;1uF,20%,50V,HR,TP,4.3x4.3x5.2mm	1	S.A	
....4	C1005	2402-001257	C-AL,SMD;470uF,20%,16V,-,TP,8.3*10	1	S.A	
....4	C1039	2402-001257	C-AL,SMD;470uF,20%,16V,-,TP,8.3*10	1	S.A	
....4	C1010	2402-001259	C-AL,SMD;220uF,20%,16V,WT,REEL,8X10	1	S.A	
....4	C2014	2402-001330	C-AL,SMD;330uF,20%,25V,TP,10x10mm	1	S.N.A	
....4	T0052	2703-000125	INDUCTOR-SMD;10uH,10%,2012	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
....4	T0052	2703-000417	INDUCTOR-SMD;220uH,5%,3225	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
....4	T0052	2703-001426	INDUCTOR-SMD;680uH,20%,7070	1	S.A	
....4	T0052	2703-001778	INDUCTOR-SMD;3.3uH,20%,3225	1	S.A	
....4	T0052	2703-002722	INDUCTOR-SMD;22uH,20%,12x12mm	1	S.A	
....4	L2001	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	L2002	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
....4	X202	2801-003667	CRYSTAL-SMD;14.31818MHz,30ppm,28-AAN,16p	1	S.A	
....4	X202	2801-003954	CRYSTAL-SMD;27MHz,30ppm,28-AAN,16pF,50oh	1	S.A	
....4	F103	2901-001114	FILTER-EMI SMD;25VDC,2.0ADC,-,100nF,3.2x	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
....4	T0568	3301-001278	BEAD-SMD;120ohm,1608,200mA,TP,169ohm/174	1	S.N.A	
....4	T0568	3301-001278	BEAD-SMD;120ohm,1608,200mA,TP,169ohm/174	1	S.N.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
....4	T0568	3301-001393	BEAD-SMD;60ohm,3216,1500mA,TP,41ohm/40MH	1	S.N.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
....4	T0568	3301-001412	BEAD-SMD;60ohm,2012,800mA,TP,65ohm/110MH	1	S.N.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
....4	JA3001	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	JA3002	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
....4	T0077	BN41-00981B	PCB MAIN;Coral iDTV Reverse,FR-4,4,1.6T,	1	S.N.A	
....4	M0018	BN97-02084A	ASSY MICOM;T-PERLDEUC-1011.0,N50A/L330/4	1	S.N.A	
.....5	IC115	1107-001415	IC-FLASH MEMORY;29W320D,4Mx8/2Mx16Bit,TS	1	S.N.A	
....4	M0018	BN97-02084B	ASSY MICOM;T-CRL32PEUMD-1006.0,N50A,2007	1	S.N.A	
.....5	IC115	1107-001709	IC-FLASH MEMORY;MX25L1605A,16Mbit,2Mx8,S	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
0.1	M0003	BN92-03169H	ASSY BOX;LE37A456C2DXXH	1	S.N.A	
..2	M0521	BN69-02293A	BOX-SET,IN;L450-37,CB,C-01,DY-01,AB,W139	1	S.N.A	
..2		BN69-02583G	BOX-SET,OUT;37L450,CB,C-03,DW-75,YEL,W99	1	S.N.A	
0.1	M0113	BN92-03175B	ASSY P/MATERIAL;37L450,W/W	1	S.N.A	
..2	T0524	6902-000524	BAG PE;HDPE/NITRON,T0.015/T0.5,W1200,L11	1	S.N.A	
..2	T0081	HA83-00057A	LP-TAPE-CELLULOSE;,HA02-030011,T0,046,W7	0.88	S.N.A	
..2	T0214	AA61-20285C	HOLDER-BOX;CORAL,PP,BLACK,HB	4	S.N.A	
..2	T0081	HA83-00057B	LP-TAPE-CELLULOSE;,HA02-030010,T0,046,W7	1.15	S.N.A	
..2		AA01-00004A	FOIL;2000,2000,NTR,SEH	0.111	S.N.A	
..2	T0376	BH69-00260A	BAG AIR;LDPE,0.2,1000,1800,NATURAL,-,-,-	0.013	S.N.A	
..2		HA83-00056A	LP-COVER;0.0001,WHT,STRECH FOIL	0.002	S.N.A	
0.1	M0019	BN92-03280H	ASSY LABEL;LE37A456C2CXXE	1	S.N.A	
0.1	M0045	BN92-03322D	ASSY ACCESSORY;LE40A456C1DXXC	1	S.N.A	
..2	M0045	BN96-07319A	ASSY ACCESSORY-MANUAL;LE26A456C1DXXC	1	S.A	
...3	T0511	BN68-01424A	MANUAL USERS;COMM,SAMSUNG,8Langs,W.Europ	1	S.N.A	
...3		AA68-03242K	MANUAL FLYER-02,SAFETY GUIDE;comm,Samsun	1	S.N.A	
...3	T0175	BN68-00514E	MANUAL FLYER-01,WARRANTY CARD;comm,Samsu	1	S.N.A	
..2	M0045	BN96-07319E	ASSY ACCESSORY-CABLE;LE40A456C1DXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0074	BN59-00684A	REMOCON;TM-96B,49,EUROPE_DTV-450	1	S.A	
...3		BN63-01798A	CLOTH-CLEAN;RE40**,CLOTH,180,200,RHCM	1	S.N.A	
...3	T0531	BN63-04243B	COVER-BOTTOM;37,40L450,HIPS,HB,BK500	1	S.N.A	
0.1	M0590	BN81-01862A	AS-T-CON BOARD;CLAA370WA03SC,00446A,-,-,	1	S.A	

5-8. LE40A45*C** Parts List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
		LE40A456C2DXXC	LE40A456C2D,N51A/40AC2-GCR,40,LCD-TV,SPA			
0.1	M0001	BN90-01503K	ASSY COVER FRONT;LE40A456C2DXXH	1	S.N.A	
..2	T0003	BN96-06786K	ASSY COVER P-FRONT;40L456,EO(iDTV),Squar	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.A	
...3	CCM1	BN63-02183E	COVER-SHEET;Rhcm,PE Vinyl,T0.05,750mm,20	0.81	S.N.A	
...3	M0112	BN63-04170E	COVER-FRONT;40L450,EO(iDTV),ABS+PMMA,-,-	1	S.N.A	
....4		BN81-00204P	RESIN-HIGH GLOSS;SF-0505,K21294,ABS HB P	849.2	S.N.A	
...3	T0059	BN64-00379A	INDICATOR LED;ROME-II,23,PC,CLEAR	1	S.N.A	
...3	T0061	BN64-00453A	WINDOW-REMOCON;32R71,PC,VIOLET,DIFFUSER(	1	S.N.A	
...3	T0022	BN64-00755A	KNOB-CONTROL;32L450,ABS,V0,BK07	1	S.N.A	
....4		BH83-00150P	CKD-ABS HB;HF-0680U,K2331	0.037	S.N.A	
...3		BN96-06795B	ASSY HOLDER P-BOSS;37,40L450,EO,HIPS,HB,	1	S.N.A	
....4		BN61-03677B	HOLDER-BOSS BOTTOM;37,40L450,EO,HIPS,HB,	1	S.N.A	
.....5		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.21	S.N.A	
....4		BN61-03261B	BOSS-TAPE;Tulip,ACRYL,T1.1,W20mm,GRAY,TA	0.74	S.N.A	
...3	M0145	BN96-07269A	ASSY BOARD P-FUNCTION;LN40A450C1D,CT5000	1	S.A	
...3	M0146	BN96-07270E	ASSY BOARD P-POWER & IR;LN40A450C1D,CT50	1	S.A	
...3	T0069	BP60-00015V	SPACER-FELT;L450 40",FELT,L900,BLK,T0.35	2	S.N.A	
...3	T0069	BP60-00015X	SPACER-FELT;L450 40",FELT,L510,BLK,T0.35	2	S.N.A	
...3	M0279	AA63-01637A	FELT;50P9,FELT,0.5,10,80	1	S.N.A	
...3		BN64-00795A	DECORATION-BOTTOM;L450 40INCH,PC,-,-,-,-	1	S.N.A	
....4		BN81-00116J	RESIN;PC CLEAR,3020IR,CLR,HF-1130R,-,-,-	203.5	S.N.A	
..2	T0175	BN96-06818D	ASSY SPEAKER P;8ohm,CORAL,L450,10W,400/6	1	S.A	
0.1	M0216	BN90-01572A	ASSY STAND;40L450,W/W	1	S.N.A	
..2	M0027	BN96-06259A	ASSY STAND P-BASE;37,40L450,,ABS+PMMA,HB	1	S.A	
...3	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.A	
...3	M0081	6003-001239	SCREW-TAPTITE;FH,+,-,B,M4,L10,ZPC(WHT),S	8	S.A	
...3		BN61-02248A	HOLDER-SWIVEL RING;40R71,ACETAL NATUAL,T	1	S.N.A	
...3		BN61-02883A	BRACKET-STAND BOTTOM;BORDEAUX PLUS,40,SE	1	S.N.A	
...3		BN61-02885A	HOLDER-SWIVEL RING;MURANO40,ACETAL NATUR	1	S.N.A	
...3		BN61-02886A	BRACKET-HINGE SWIVEL;BORDEAUX PLUS,40,SE	1	S.N.A	
...3	T0920	BN61-03681A	GUIDE-STAND;40L450,PC+GF 20%,-,-,-,BK500	1	S.N.A	
....4		BN81-00204H	RESIN;Trirex,3025G20 BK,ABS+PC G/F 20%,4	0.363	S.N.A	
...3	CCM1	BN63-02183E	COVER-SHEET;Rhcm,PE Vinyl,T0.05,750mm,20	0.5	S.N.A	
...3	T0004	BN63-03030A	COVER-STAND BASE;40R81,ABS+PMMA,-,-,-,HB	1	S.N.A	
....4		BN81-00204P	RESIN-HIGH GLOSS;SF-0505,K21294,ABS HB P	0.653	S.N.A	
...3	M0126	BN73-00052C	RUBBER-FOOT;LCD TV,CR RUBBER,T2.0 DIA19,	4	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	S.A	
0.1	M0002	BN90-01574B	ASSY COVER REAR;40L450,EO(iDTV)	1	S.N.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	1	S.A	
..2	T0081	6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	11	S.A	
..2	M0013	BN96-07204B	ASSY COVER P-REAR;40L450,EO(iDTV),HIPS,H	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.A	
...3	T0101	BN61-03348A	BRACKET-WALL;LCD TV 32,SECC T1.2,-,-,-,-	2	S.N.A	
...3	M0006	BN63-04247B	COVER-REAR;40L450,EO(iDTV),HIPS,HB,BK500	1	S.N.A	
....4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	,730.200	S.N.A	
...3	T0071	BN64-00776A	INLAY-TERMINAL;L450,EO(iDTV),PS SHEET,T0	1	S.N.A	
...3	T0064	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,-,-,BLK,-	1	S.N.A	
...3		BN63-01151D	FELT-NON WOVEN;SP20UO,FELT,T0.5,10,90	4	S.N.A	
0.1		BN91-01985C	ASSY LCD-AMLCD;LN40A450C1DXZA,LTF400AA01	1	S.N.A	
..2	M0215	BN07-00523A	LCD-PANEL;LTF400AA01	1	S.A	
0.1	M0017	BN91-02045H	ASSY CHASSIS;LE40A457C1DXXU	1	S.N.A	
..2	M0014	BN94-01967P	ASSY PCB MAIN-AMLCD;LE40A456C1DXXC	1	S.A	
...3	CIS3	BN40-00124A	TUNER;DNOS403SH071A(S),DNOS403SH071A(S),	1	S.A	
...3	T0079	BN94-02024B	ASSY PCB MISC-MAIN;DP,BN41-00980B, LE40A	1	S.N.A	
....4	M0014	BN94-01967R	ASSY PCB MAIN-AMLCD;LE40A457C1DXXC,W/O T	1	S.A	
.....5	T0245	0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	S.N.A	
.....5	JA3003_3H	3701-001388	CONNECTOR-HDMI;20P,Phosphor Bronze,ANGLE	1	S.A	
.....5	JA3004	3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	S.A	
.....5	CN906	3707-001081	CONNECTOR-OPTICAL;STRAIGHT,SPDIF	1	S.A	
.....5	JA7201	3709-001508	CONNECTOR-CARD SLOT;68P,1.27mm,PIN,PCMCI	1	S.A	
.....5	CN330	3711-000058	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5MM,AN	1	S.A	
.....5	CN330	3711-004379	HEADER-BOARD TO CABLE;BOX,4P,1R,2mm,STRA	1	S.A	
.....5	CN330	3711-004484	HEADER-BOARD TO CABLE;BOX,5P,1R,2mm,STRA	1	S.A	
.....5	CN330	3711-004484	HEADER-BOARD TO CABLE;BOX,5P,1R,2mm,STRA	1	S.A	
.....5	CN330	3711-004531	HEADER-BOARD TO CABLE;BOX,10P,1R,2mm,ANG	1	S.A	
.....5	CN330	3711-004712	HEADER-BOARD TO CABLE;BOX,9P,1R,2mm,STRA	1	S.A	
.....5	CN330	3711-005842	HEADER-BOARD TO CABLE;BOX,24P,2R,2MM,STR	1	S.A	
.....5	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
.....5	JA330	3722-001061	JACK-PHONE;1P,3.6PI,AG,BLK,N	1	S.A	
.....5	CN3214_SV	3722-002275	JACK-DIN;4P,-,SN,BLK,-	1	S.A	
.....5	JA3204_SH	3722-002680	JACK-EAR PHONE;6P,NiSn,BLK,ANGLE	1	S.A	
.....5	JA3201	3722-002681	JACK-SCART;42P,SN,BLK	1	S.A	
.....5	JA333	3722-002690	JACK-PIN;3P,Ni,RED/WHT/YEL,ANGLE	1	S.A	
.....5	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
.....5	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
.....5	JA333	3722-002691	JACK-PIN;2P,Ni,WHT/RED,STRAIGHT	1	S.A	
.....5	JA333	3722-002703	JACK-PIN;3P,Ni,GRN/BLU/RED,STRAIGHT	1	S.A	
.....5	M0107	BN63-04528A	SHIELD-COVER;450 EO,SPTE,T0.3,PAL NORMA	1	S.N.A	
.....5	HDCP	BN97-00688A	ASSY HDCP;BN46-00018A,PS-42V6S,D73A,GENE	1	S.N.A	
......6		BN46-00018A	KEY CODE-CERTIFICATE;(HDCP KEY)PPM42M5S,	1	S.N.A	
.....5	T0603	BN97-02356R	ASSY SMD-AMLCD;LE40A457C1DXXC,W/O TUNER	1	S.N.A	
......6	SUB05	0202-001477	SOLDER-CREAM;LST309-M,-,D20~45um,96.5Sn/	3.137	S.N.A	
......6	D2001	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
......6	D2002	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
......6	D2003	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
......6	D2009	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
......6	D2012	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
......6	D2015	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,LL-34,	1	S.A	
......6	D1004	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
......6	D3003	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	D3004	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3006	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3007	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3008	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3009	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3010	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3011	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3012	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3013	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3016	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3017	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3019	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3021	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3022	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3023	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3024	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3025	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3026	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3027	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3030_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3031_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3034_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3035_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3036_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3037_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3038_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3039_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3040_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3041_3H	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3045	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3046	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3047	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3061	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3062	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3064	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3066	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3078	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3202	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3203	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3204	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3205	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3206	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3217	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3218	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3219	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3230_SA	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D3236_SH	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	S.A	
.....6	D1002	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
.....6	D2019	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
.....6	D3063	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
.....6	D3065	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	D3067	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
.....6	D3077	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
.....6	D3079	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
.....6	D3080_3H	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
.....6	D3244_SH	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	1	S.A	
.....6	D0254	0402-001019	DIODE-SCHOTTKY;MBRS340,40V,3000mA,DO-214	1	S.A	
.....6	D1098_40_L	0402-001098	DIODE-RECTIFIER;SK34,40V,3A,SMC,TP	1	S.A	
.....6	D2008	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
.....6	D3020	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
.....6	D3033_3H	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
.....6	D3048	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
.....6	D3049	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
.....6	D3050	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
.....6	D3051	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
.....6	D3052	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
.....6	D3074	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
.....6	D5001	0403-000002	DIODE-ZENER;VLZ5V6B,5.45/5.73V,500mW,SOD	1	S.A	
.....6	D3070	0403-000258	DIODE-ZENER;BZX84C5V6,5.2-6V,225mW,SOT-2	1	S.A	
.....6	D3216	0403-000607	DIODE-ZENER;VLZ16C,15.69/16.51V,500mW,SO	1	S.A	
.....6	D3229	0403-000607	DIODE-ZENER;VLZ16C,15.69/16.51V,500mW,SO	1	S.A	
.....6	D3002	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
.....6	D3015	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
.....6	D3029_3H	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
.....6	D3042	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
.....6	D5002	0403-000771	DIODE-ZENER;VLZ6V2B,5.96-6.27V,500mW,SOD	1	S.A	
.....6	D3001	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
.....6	D3014	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
.....6	D3028_3H	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
.....6	D3208_SV	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
.....6	D5201	0403-001052	DIODE-ZENER;RD8.2MB,7.7-8.7V,200mW,SOT-2	1	S.A	
.....6	D1005	0403-001425	DIODE-ZENER;BZX84C33,31-35V,350mW,SOT-23	1	S.A	
.....6	D0254	0404-001271	DIODE-SCHOTTKY;SSA34,40V,3000mA,SMA,TP	1	S.A	
.....6	D3053	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3054	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3055	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3056	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3057	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3058	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3068	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3069	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3212	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3213	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3214	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3215	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3220	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3221	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3222	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3223	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3224	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3225	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3226	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	D3227	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3228	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3231_SA	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3232_SA	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3233_SA	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3237_SH	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3238_SH	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3239_SV	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D3240_SV	0406-001172	DIODE-TVS;CDS3C30GTH,48/-/50V,SMD	1	S.A	
.....6	D2013	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
.....6	D3071	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
.....6	D3072	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
.....6	D7201	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
.....6	D7202	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
.....6	D7203	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
.....6	D7204	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
.....6	D7205	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
.....6	D7206	0407-000123	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	1	S.A	
.....6	Q7001	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,	1	S.A	
.....6	Q7002	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,	1	S.A	
.....6	Q7402	0501-000434	TR-SMALL SIGNAL;KTC3875S-GR,NPN,150mW,SO	1	S.A	
.....6	Q1001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q1002_L	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q2001	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q2002	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q2003	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q2004	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q2007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q2008	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q2009	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q3006	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q3007	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q3207	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q3208	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q5002	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q5201	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q5202	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q6003_L	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	1	S.A	
.....6	Q2005	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
.....6	Q2006	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
.....6	Q3202	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
.....6	Q3205	0501-000669	TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2	1	S.A	
.....6	Q1004_L	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
.....6	Q3201	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
.....6	Q3203	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
.....6	Q3204	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
.....6	Q3206	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
.....6	Q6004_40_L	0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	S.A	
.....6	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
.....6	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
.....6	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
.....6	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
.....6	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
.....6	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
.....6	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
.....6	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
.....6	Q409	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	S.A	
.....6	Q409	0505-001165	FET-SILICON;SI3443BDV,P,-20V,+-4.4A,65mo	1	S.A	
.....6	Q409	0505-001170	FET-SILICON;SI9933ADY-T1,P,-20V,3.4A,0.0	1	S.A	
.....6	IC104	0801-002095	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,TSSOP	1	S.A	
.....6	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
.....6	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
.....6	IC104	0801-002172	IC-CMOS LOGIC;74LCX16244,BUFFER/LINE DRI	1	S.A	
.....6	IC104	0801-002432	IC-CMOS LOGIC;74LVC244,8BIT BUFFER/DRIVE	1	S.N.A	
.....6	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	S.A	
.....6	IC104	0801-002633	IC-CMOS LOGIC;7WBD3125,2bit BUS SWITCH,S	1	S.A	
.....6	IC104	0801-002633	IC-CMOS LOGIC;7WBD3125,2bit BUS SWITCH,S	1	S.A	
.....6	IC104	0801-002633	IC-CMOS LOGIC;7WBD3125,2bit BUS SWITCH,S	1	S.A	
.....6	IC104	0801-002633	IC-CMOS LOGIC;7WBD3125,2bit BUS SWITCH,S	1	S.A	
.....6	IC104	0801-003239	IC-CMOS LOGIC;74LVC1G00,2-input NAND Gat	1	S.A	
.....6	IC104	0801-003239	IC-CMOS LOGIC;74LVC1G00,2-input NAND Gat	1	S.A	
.....6	IC2002	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
.....6	IC5203	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	1	S.A	
.....6	IC106	1001-001082	IC-VIDEO SWITCH;BA7657F,-,SOP,24P,300MIL	1	S.A	
.....6	IC3011	1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	1	S.A	
.....6	IC106	1001-001440	IC-VIDEO SWITCH;SiI9185CTU,QFP,80P,3.3V,	1	S.A	
.....6	IC107	1002-001482	IC-D/A CONVERTER;WM8521H9GED/R,16bit,SOI	1	S.A	
.....6	IC110	1006-001076	IC-DRIVER/RECEIVER;MAX232ECWE+T,SOP,16P,	1	S.A	
.....6	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
.....6	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
.....6	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
.....6	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8Bit,SOP,8P,5x	1	S.A	
.....6	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	S.A	
.....6	IC112	1103-001410	IC-EEPROM;S-24CS08AFJ-TB-1GE,8Kbit,1Kx8,	1	S.A	
.....6	IC113	1105-001712	IC-DRAM;HYB25D256163CE,DDR,256Mbit,16Mx1	1	S.A	
.....6	IC5201	1105-001838	IC-DDR SDRAM;EM6A9160TS0A-5G,DDR SDRAM,1	1	S.A	
.....6	DU410	1201-000166	IC-OP AMP;LM358,SOP,ST,8P,150MIL,DUAL,10	1	S.A	
.....6	DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	1	S.A	
.....6	DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	1	S.A	
.....6	T0085	1201-002487	IC-AUDIO AMP;MAX9728A,QFN,12P,3x3mm,DUAL	1	S.A	
.....6	T0124	1201-002677	IC-POWER AMP;NTP3100,QFN56,56P,8x8mm,DUA	1	S.A	
.....6	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,-,PLA	1	S.A	
.....6	T0087	1203-002842	IC-POSI.FIXED REG.;AP1117D-33A,TO-252,3P	1	S.A	
.....6	T0087	1203-002974	IC-POSI.FIXED REG.;AP1117D-25A,TO-252,3P	1	S.A	
.....6	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
.....6	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
.....6	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
.....6	IC012	1203-002995	IC-POSI.ADJUST REG.;AP1117D-A,TO-252,3P,	1	S.A	
.....6	T0170	1203-003059	IC-SWITCH VOL. REG.;MP1583,SOIC,8P,4.9x3	1	S.A	
.....6	IC7206	1203-003394	IC-POWER SUPERVISOR;MIC2544-1YM,SOP,8P,4	1	S.A	
.....6	T0087	1203-003696	IC-POSI.FIXED REG.;NCP1117DT18T5G,DPAK,3	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	IC5002	1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	S.A	
.....6	IC2005	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
.....6	IC7402	1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	S.A	
.....6	T0087	1203-004816	IC-POSI.FIXED REG.;KIA78D015F,DPAK,3P,6.	1	S.A	
.....6	IC118	1204-002779	IC-VIDEO PROCESS;S4LF122X01,PBGA,208P,17	1	S.A	
.....6	IC7001	1204-002861	IC-DECODER;UPD61211GM-104-GAA-A,QFP,216P	1	S.A	
.....6	IC109	1205-003432	IC-LCD CONTROLLER;SEMS01,LQFP,256P,30x30	1	S.A	
.....6	IC3012	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
.....6	IC3013	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
.....6	IC3014_3H	1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	S.A	
.....6	R110	2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000139	R-CHIP;220ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000162	R-CHIP;100

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000242	R-CHIP;1.5Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
.....6	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
.....6	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
.....6	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
.....6	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
.....6	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
.....6	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
.....6	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
.....6	R110	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	1	S.A	
.....6	R110	2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-001217	R-CHIP;82ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001217	R-CHIP;82ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001307	R-CHIP;180ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001307	R-CHIP;180ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001317	R-CHIP;910ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001317	R-CHIP;910ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	S.A	
.....6	R110	2007-002796	R-CHIP;510ohm,5%,1/16W,TP,1005	1	S.A	
.....6	R110	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007141	R-CHIP;240ohm,5%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007307	R-CHIP;150ohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007319	R-CHIP;390ohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007334	R-CHIP;200Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007334	R-CHIP;200Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007334	R-CHIP;200Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007469	R-CHIP;110ohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007791	R-CHIP;9.1Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-007791	R-CHIP;9.1Kohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-008429	R-CHIP;499ohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	R110	2007-008649	R-CHIP;220ohm,1%,1/16W,TP,1005	1	S.N.A	
.....6	RA5012	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA5013	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA5014	2011-000585	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA6007_L	2011-000686	R-NETWORK;56ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	RA5021	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA5022	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA5023	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA5201	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA5202	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA5203	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA5204	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA5205	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA7203	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA7204	2011-000881	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA5006	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
.....6	RA6004_FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
.....6	RA6005_FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
.....6	RA6006_FBE	2011-001001	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,3.2	1	S.A	
.....6	RA5001	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5002	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5003	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5004	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5015	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5025	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5030	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5031	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5034	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA7009	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA7010	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA7011	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA7012	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA7209	2011-001011	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA7001	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA7002	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA7003	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA7004	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA7005	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA7006	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA7007	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA7008	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA7205	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA7210	2011-001087	R-NETWORK;75ohm,5%,1/16W,L,CHIP,8P,TP,3.	1	S.A	
.....6	RA5005	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5007	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5008	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5016	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5017	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5018	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5019	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5020	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5026	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5027	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5028	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5029	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA5032	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	RA5033	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA7201	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	RA7202	2011-001093	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,3	1	S.A	
.....6	C120	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,1005

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
.....6	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
.....6	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
.....6	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
.....6	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
.....6	C120	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,1005	1	S.A	
.....6	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
.....6	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
.....6	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
.....6	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
.....6	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
.....6	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
.....6	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
.....6	C120	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,1005	1	S.A	
.....6	C120	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,1005	1	S.A	
.....6	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
.....6	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
.....6	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
.....6	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
.....6	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
.....6	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
.....6	C120	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,1005	1	S.N.A	
.....6	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
.....6	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
.....6	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
.....6	C120	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	S.A	
.....6	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
.....6	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
.....6	C120	2203-000925	C-CER,CHIP;470nF,+80-20%,50V,Y5V,2012	1	S.A	
.....6	C120	2203-000975	C-CER,CHIP;47nF,10%,25V,X7R,TP,1608,-	1	S.A	
.....6	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
.....6	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
.....6	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
.....6	C120	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,1005	1	S.A	
.....6	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
.....6	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
.....6	C120	2203-001630	C-CER,CHIP;330nF,+80-20%,16V,Y5V,1608	1	S.A	
.....6	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
.....6	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
.....6	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
.....6	C120	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	1	S.A	
.....6	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
.....6	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
.....6	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
.....6	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
.....6	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
.....6	C120	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	1	S.A	
.....6	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608	1	S.A	
.....6	C120	2203-005261	C-CER,CHIP;1000nF,10%,25V,X7R,3216	1	S.A	
.....6	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
.....6	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
.....6	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
.....6	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
.....6	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
.....6	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
.....6	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
.....6	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
.....6	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
.....6	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
.....6	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
.....6	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
.....6	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
.....6	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
.....6	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
.....6	C120	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012	1	S.A	
.....6	C120	2203-005533	C-CER,CHIP;1000nF,20%,6.3V,X7R,TP,1608	1	S.A	
.....6	C120	2203-005533	C-CER,CHIP;1000nF,20%,6.3V,X7R,TP,1608	1	S.A	
.....6	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
.....6	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
.....6	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
.....6	C120	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,1005	1	S.N.A	
.....6	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
.....6	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
.....6	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
.....6	C120	2203-005809	C-CER,CHIP;1000nF,10%,16V,X7R,-,2012	1	S.A	
.....6	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,1005	1	S.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006126	C-CER,CHIP;47NF,10%,16V,X7R,TP,1005	1	S.N.A	
.....6	C120	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	S.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	C120	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	C120	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,2012	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	C120	2203-006681	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1005	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
.....6	C120	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012 (	1	S.N.A	
.....6	C1015	2402-001128	C-AL,SMD;100##F,20%,16V,-,TP,6.3X5.7mm	1	S.A	
.....6	C3056	2402-001129	C-AL,SMD;47UF,20%,16V,WT,TP,6.3X5.2MM	1	S.A	
.....6	C1025	2402-001238	C-AL,SMD;1uF,20%,50V,HR,TP,4.3x4.3x5.2mm	1	S.A	
.....6	C1005	2402-001257	C-AL,SMD;470uF,20%,16V,-,TP,8.3*10	1	S.A	
.....6	C1039	2402-001257	C-AL,SMD;470uF,20%,16V,-,TP,8.3*10	1	S.A	
.....6	C1010	2402-001259	C-AL,SMD;220uF,20%,16V,WT,REEL,8X10	1	S.A	
.....6	C2014	2402-001330	C-AL,SMD;330uF,20%,25V,TP,10x10mm	1	S.N.A	
.....6	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
.....6	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
.....6	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
.....6	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
.....6	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
.....6	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
.....6	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
.....6	T0052	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	S.A	
.....6	T0052	2703-000417	INDUCTOR-SMD;220uH,5%,3225	1	S.A	
.....6	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
.....6	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
.....6	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
.....6	T0052	2703-001334	INDUCTOR-SMD;1.5uH,10%,2012	1	S.A	
.....6	T0052	2703-001426	INDUCTOR-SMD;680uH,20%,7070	1	S.A	
.....6	T0052	2703-001778	INDUCTOR-SMD;3.3uH,20%,3225	1	S.A	
.....6	T0052	2703-002722	INDUCTOR-SMD;22uH,20%,12x12mm	1	S.A	
.....6	L2001	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
.....6	L2002	2704-000018	INDUCTOR-SMD-ARRAY;15uH,2000mA,2,0.124oh	1	S.N.A	
.....6	X202	2801-003667	CRYSTAL-SMD;14.31818MHz,30ppm,28-AAN,16p	1	S.A	
.....6	X202	2801-003954	CRYSTAL-SMD;27MHz,30ppm,28-AAN,16pF,50oh	1	S.A	
.....6	F103	2901-001114	FILTER-EMI SMD;25VDC,2.0ADC,-,100nF,3.2x	1	S.A	
.....6	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
.....6	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	1	S.A	
.....6	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
.....6	T0568	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	S.N.A	
.....6	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
.....6	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
.....6	G101	3301-000316	CORE-FERRITE BEAD;120ohm,2012,TP,-,-	1	S.N.A	
.....6	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
.....6	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
.....6	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
.....6	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
.....6	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
.....6	T0568	3301-001145	BEAD-SMD;60ohm,4516,TP,70ohm/45MHz,82ohm	1	S.N.A	
.....6	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
.....6	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
.....6	T0568	3301-001148	BEAD-SMD;60ohm,1608,TP,-,-	1	S.N.A	
.....6	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
.....6	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
.....6	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
.....6	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
.....6	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
.....6	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
.....6	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
.....6	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
.....6	T0568	3301-001163	BEAD-SMD;80ohm,2012,TP,-,192ohm/867MHz	1	S.N.A	
.....6	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
.....6	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
.....6	T0568	3301-001236	BEAD-SMD;60ohm,1608,-,-,-	1	S.N.A	
.....6	T0568	3301-001278	BEAD-SMD;120ohm,1608,200mA,TP,169ohm/174	1	S.N.A	
.....6	T0568	3301-001278	BEAD-SMD;120ohm,1608,200mA,TP,169ohm/174	1	S.N.A	
.....6	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
.....6	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
.....6	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
.....6	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
.....6	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
.....6	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
.....6	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
.....6	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
.....6	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
.....6	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
.....6	T0568	3301-001324	BEAD-SMD;15ohm,2012,600mA,TP,,,0.1ohm	1	S.A	
.....6	T0568	3301-001393	BEAD-SMD;60ohm,3216,1500mA,TP,41ohm/40MH	1	S.N.A	
.....6	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
.....6	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
.....6	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
.....6	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
.....6	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
.....6	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
.....6	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
.....6	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
.....6	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
.....6	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
.....6	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
.....6	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	1	S.A	
.....6	T0568	3301-001412	BEAD-SMD;60ohm,2012,800mA,TP,65ohm/110MH	1	S.N.A	
.....6	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
.....6	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
.....6	T0568	3301-001569	BEAD-SMD;600ohm,2012,1000mA,TP,520ohm/90	1	S.N.A	
.....6	JA3001	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
.....6	JA3002	3701-001367	CONNECTOR-HDMI;19P,2R,FEMALE,SMD,AU	1	S.A	
.....6	CN6001_L	3708-001150	CONNECTOR-FPC/FFC/PIC;30P,1mm,SMD-A,SN,Y	1	S.A	
.....6	T0077	BN41-00980B	PCB MAIN;Coral iDTV Normal,FR-4,4,1.6T,1	1	S.N.A	
.....6	M0018	BN97-02084A	ASSY MICOM;T-PERLDEUC-1011.0,N50A/L330/4	1	S.N.A	
.....7	IC115	1107-001415	IC-FLASH MEMORY;29W320D,4Mx8/2Mx16Bit,TS	1	S.N.A	
.....6	M0018	BN97-02084B	ASSY MICOM;T-CRL32PEUMD-1006.0,N50A,2007	1	S.N.A	
.....7	IC115	1107-001709	IC-FLASH MEMORY;MX25L1605A,16Mbit,2Mx8,S	1	S.N.A	
0.1		BN91-02054G	ASSY SHIELD-SQD;LE40A456C2DX*	1	S.N.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	6	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	6	S.A	
..2	M0081	6003-000115	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(BLK),SWRC	1	S.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	4	S.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	1	S.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	1	S.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	1	S.A	
..2	M0081	6003-000337	SCREW-TAPTITE;BH,+,S,M4,L10,ZPC(BLK),SWR	2	S.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	5	S.A	
..2	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.A	
..2	M0081	6003-001439	SCREW-TAPTITE;BH,+,-,S,M4,L8,ZPC(WHT),SW	1	S.N.A	
..2	M2893	BN39-00674A	LEAD CONNECTOR;LNR469DX/XAA,UL1007#26,5P	1	S.A	
..2	M2893	BN39-00802F	LEAD CONNECTOR;LE46S86BDX,UL1007#26,24PI	1	S.A	
..2	M2893	BN39-00830C	LEAD CONNECTOR;LN40A450C1D,UL3443 #28,7P	1	S.A	
..2	M2893	BN39-01021A	LEAD CONNECTOR;LN46A550P,UL1007#26,2pin,	1	S.A	
..2	M0174	BN44-00198A	IP BOARD;SIP40D,PEARL,15mA,130mA,150Hz,2	1	S.A	
..2	M0114	BN61-02500A	HOLDER-WIRE;NYLON6.6,NATURAL	4	S.N.A	
..2	M0115	BN61-02882A	BRACKET-STAND LINK;TULIP,40,SECC,T1.6,-,	1	S.N.A	
..2	M0254	BN61-02952K	HOLDER-SIDE AV;32S81,EO(HOTEL),HIPS,V0,-	1	S.N.A	
...3		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	17.3	S.N.A	
..2	M0146	BN61-03415A	BRACKET-PANEL TOP;PEONY 46,GPSP T1.2	2	S.N.A	
..2	T0101	BN61-03700A	BRACKET-WALL;L450 40INCH,SECC,T1.2,-,-,-	1	S.N.A	
..2	M0107	BN63-03039A	SHIELD-COVER;MURANO40,PCM,T0.5,IDTV	1	S.N.A	
..2	M0125	BN96-04938B	ASSY INLET P;UL1617#22,250/250mm	1	S.A	
..2	T0447	BN96-06960A	ASSY BRACKET P-PANEL;40A450C,SECC,T1.0,C	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	1	S.A	
...3	M0081	6003-001188	SCREW-TAPTITE;BH,+,-,B,M4,L10,ZPC(WHT),S	2	S.A	
...3	M0131	AA63-01438A	GASKET;Bordeaux,Conductive Fabric,7mm,8m	1	S.N.A	
...3		BN61-02879A	BRACKET-GUIDE MAIN;TULIP,40,GPSP,T1.2	1	S.N.A	
...3		BN61-02880A	BRACKET-GUIDE POWER R;TULIP,40,gpsp,T1.2	1	S.N.A	
...3		BN61-02881A	BRACKET-GUIDE POWER L;TULIP,40,GPSP,T1.2	1	S.N.A	
...3		BN61-03697A	BRACKET-GUIDE POWER R;L450 40INCH,GPSP,T	1	S.N.A	
...3		BN61-03861A	BRACKET-PANEL BOTTOM;L450 40INCH,GPSP,T1	1	S.N.A	
...3	M0131	BN63-03519A	GASKET;Tulip,Conductive Fabric,14mm,10mm	3	S.N.A	
..2	M0214	BN96-07158P	ASSY CABLE P-FLAT;CORAL,FFC CABLE,420mm,	1	S.A	
0.1	M0003	BN92-03170J	ASSY BOX;40L450C2,EO,,	1	S.N.A	
..2	M0521	BN69-02287A	BOX-SET,IN;L450-40,CB,A1,DY-01,W1463,D75	1	S.N.A	
..2		BN69-02620H	BOX-SET,OUT;40L450,CB,C-03,DW-75,YEL,W10	1	S.N.A	
0.1	M0113	BN92-03176B	ASSY P/MATERIAL;40L450,EO	1	S.N.A	
..2	T0524	6902-000524	BAG PE;HDPE/NITRON,T0.015/T0.5,W1200,L11	1	S.N.A	
..2	T0003	6902-000604	BAG WRAPPING;LDPE,T0.02,W500,L10000,TRP,	7.8	S.N.A	
..2		6922-000003	BAND PP;PP,T0.8,W18,L1650M,TRP,DA69-9014	4.86	S.N.A	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	1.23	S.N.A	
..2	T0214	AA61-20285C	HOLDER-BOX;CORAL,PP,BLACK,HB	2	S.N.A	
0.1	M0019	BN92-03280G	ASSY LABEL;LE32A456C2CXXE	1	S.N.A	
0.1	M0045	BN92-03322D	ASSY ACCESSORY;LE40A456C1DXXC	1	S.N.A	
..2	M0045	BN96-07319A	ASSY ACCESSORY-MANUAL;LE26A456C1DXXC	1	S.A	
...3	T0511	BN68-01424A	MANUAL USERS;COMM,SAMSUNG,8Langs,W.Europ	1	S.N.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	T0175	BN68-00514E	MANUAL FLYER-01,WARRANTY CARD;comm,Samsu	1	S.N.A	
...3		AA68-03242P	MANUAL FLYER-01,,SAFETY GUIDE;comm,Samsu	1	S.N.A	
..2	M0045	BN96-07319E	ASSY ACCESSORY-CABLE;LE40A456C1DXXC	1	S.A	
...3	T0268	3903-000145	CBF-POWER CORD;DT,EU,FP3/YES,U(IEC C13-R	1	S.A	
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,-,9	1	S.N.A	
...3	T0074	BN59-00684A	REMOCON;TM-96B,49,EUROPE_DTV-450	1	S.A	
...3		BN63-01798A	CLOTH-CLEAN;RE40**,CLOTH,180,200,RHCM	1	S.N.A	
...3	T0531	BN63-04243B	COVER-BOTTOM;37,40L450,HIPS,HB,BK500	1	S.N.A	
....4		BN81-00199H	RESIN;HIPS HB,BK500,HF-1690H,K2901	0.051	S.N.A	
0.1	M0590	BN81-01692A	AS-T-CON BOARD;LTF400AA01-A01,00523A,-,-	1	S.A	
0.1	M0059	BN81-01779A	AS-INVERTER BOARD;LTF400AA01-A,BN07-0052	1	S.A	

6. Wiring Diagram

6-1. Wiring Diagram



CN1001	
1	HSYNC_OUT
2	SW_POWER
3	GND
4	A5V
5	GND
6	GND
7	B13V
8	B13V
9	GND
10	GND
11	GND
12	GND
13	B5V
14	B5V
15	B5V
16	B5V
17	GND
18	GND
19	GND
20	B13V
21	B13V
22	B13V
23	NC
24	NC

CN2101	
1	L-
2	L+
3	R-
4	R+

JA3001	
1	RX2+
2	GND
3	RX2-
4	RX1+
5	GND
6	RX1-
7	RX0+
8	GND
9	RX0-
10	RXCLK+
11	GND
12	RXCLK-
13	CEC
14	GND
15	DDC_SCL
16	DDC_SDA
17	GND
18	IDENT
19	GND
20	GND
21	GND

JA3002	
1	RX2+
2	GND
3	RX2-
4	RX1+
5	GND
6	RX1-
7	RX0+
8	GND
9	RX0-
10	RXCLK+
11	GND
12	RXCLK-
13	CEC
14	GND
15	DDC_SCL
16	DDC_SDA
17	GND
18	IDENT
19	GND
20	GND
21	GND

JA3003_3H	
1	RX2+
2	GND
3	RX2-
4	RX1+
5	GND
6	RX1-
7	RX0+
8	GND
9	RX0-
10	RXCLK+
11	GND
12	RXCLK-
13	CEC
14	GND
15	DDC_SCL
16	DDC_SDA
17	GND
18	5V
19	IDENT

CN3002	
1	IR
2	GND
3	A5V
4	LET_STB
5	BUZZER
6	INPUT1
7	INPUT2
8	GND

JA3005	
1	GND
2	SL_IN
3	SR_IN
4	SR_IN
5	SR_IN
6	SL_IN
7	SL_IN

JA3006	
1	GND
2	SVC_RX
3	SVC_TX
4	SDA_TX
5	COMM_A
6	SCL_RX
7	COMM_B

JA3007	
1	GND
2	SR_IN
3	SL_IN
4	GND
5	SL_IN
6	SR_IN

JA3008	
1	GND
2	SR_IN
3	SL_IN
4	GND
5	SL_IN
6	SR_IN

JA3009	
1	GND
2	IDENT
3	Y
4	GND
5	PB
6	PB
7	GND
8	PR
9	PR

JA3004	
1	R
2	G
3	B
4	GND
5	GND
6	GND
7	GND
8	GND
9	5V
10	IDENT
11	GND
12	SDA
13	H_SYNC
14	V_SYNC
15	SCL

JA3201			
1	SR_OUT	22	SR_OUT
2	SR_IN	23	SR_IN
3	SL_OUT	24	SL_OUT
4	GND	25	GND
5	GND	26	GND
6	SL_IN	27	SL_IN
7	NC	28	B
8	IDENT	29	IDENT
9	GND	30	GND
10	NC	31	NC
11	NC	32	G
12	NC	33	NC
13	GND	34	GND
14	GND	35	GND
15	NC	36	R
16	NC	37	FB
17	GND	38	GND
18	GND	39	GND
19	CVBS-OUT	40	CVBS_OUT
20	CVBS_IN	41	CVBS_IN
21	GND	42	GND

JA3203	
1	GND
2	SL_OUT
3	SL_OUT
4	GND
5	SR_OUT
6	SR_OUT

JA3204	
1	GND
2	NC
3	OUT_L
4	IDENT
5	OUT_R

CN3212	
1	GND
2	IDENT
3	CVBS
4	GND
5	SR_IN
6	SL_IN
7	GND
8	SL_IN
9	SR_IN

CN3214	
1	GND
2	GND
3	GND
4	Y
5	C
6	IDENT
7	GND

CN6001_FFC	
1	PANEL_VCC
2	PANEL_VCC
3	PANEL_VCC
4	PANEL_VCC
5	PANEL_VCC
6	GND
7	GND
8	GND
9	NC
10	OPTION
11	GND
12	GND
13	FBE_ODD_TX3-
14	FBE_ODD_TX3+
15	GND
16	FBE_ODD_TXCLK-
17	FBE_ODD_TXCLK+
18	GND
19	FBE_ODD_TX2-
20	FBE_ODD_TX2+
21	GND
22	FBE_ODD_TX1-
23	FBE_ODD_TX1+
24	GND
25	FBE_ODD_TX0-
26	FBE_ODD_TX0+
27	FBE_ODD_TX4-
28	FBE_ODD_TX4+
29	FBE_ODD_TX5-
30	FBE_ODD_TX5+

CN6002_DIP	
1	FBE_ODD_TX0-
2	FBE_ODD_TX0+
3	FBE_ODD_TX1-
4	FBE_ODD_TX1+
5	FBE_ODD_TX2-
6	FBE_ODD_TX2+
7	FBE_ODD_TXCLK-
8	FBE_ODD_TXCLK+
9	FBE_ODD_TX3-
10	FBE_ODD_TX3+
11	FBE_ODD_TX4-
12	FBE_ODD_TX4+
13	FBE_ODD_TX5-
14	FBE_ODD_TX5+
15	GND
16	GND
17	GND
18	NC
19	NC
20	NC
21	OPTION
22	DDC_DTRL_L
23	GND
24	GND
25	GND
26	GND
27	PANEL_VCC
28	PANEL_VCC
29	PANEL_VCC
30	PANEL_VCC

CN6003_LCD	
1	SW_INVERTER
2	ANA_DIMMING_OUT
3	PWM_DIMMING_OUT
4	GND
5	SENSE POWER


CN6004_LCIS	
1	ANA_DIMMING_OUT
2	PWM_DIMMING_OUT
3	B9V
4	FFL_H
5	B5V
6	SW_INVERTER
7	SENSE_POWER
8	GND

6-2. Wiring Picture


6-2-1. LE26/32/37A457C*D




6-2-2. LE40A457C*D

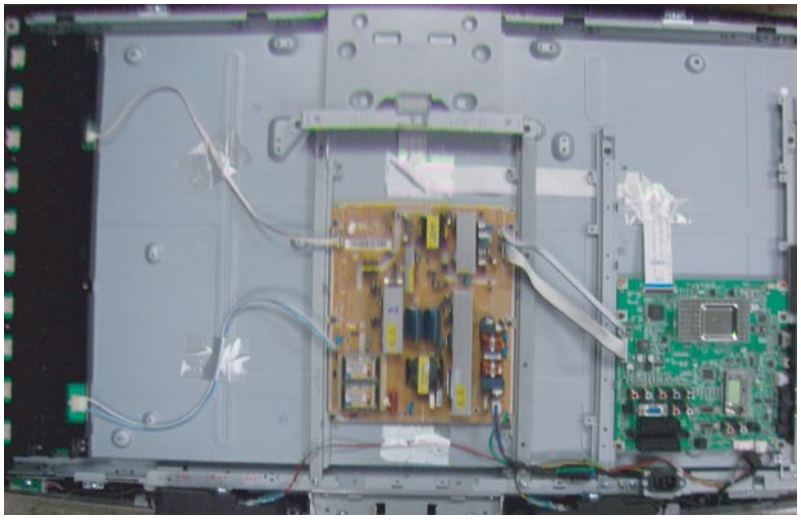

6-2-3. LE26/32/37A451C*

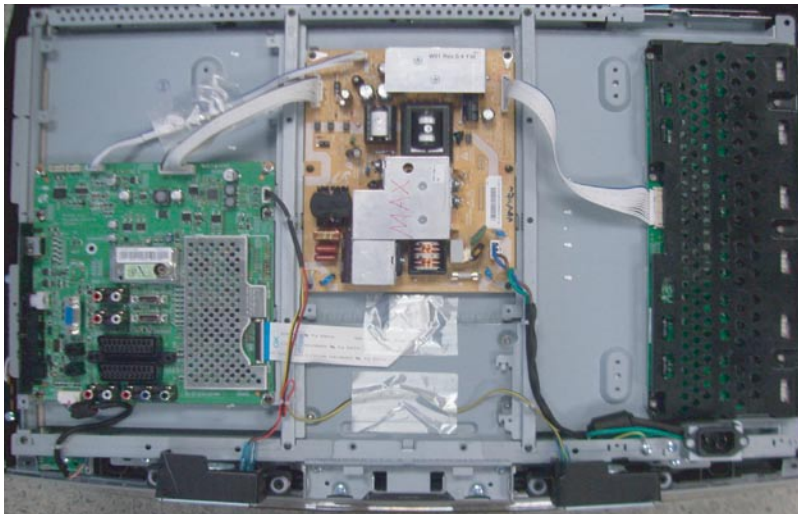











6-2-4. LE40A451C*

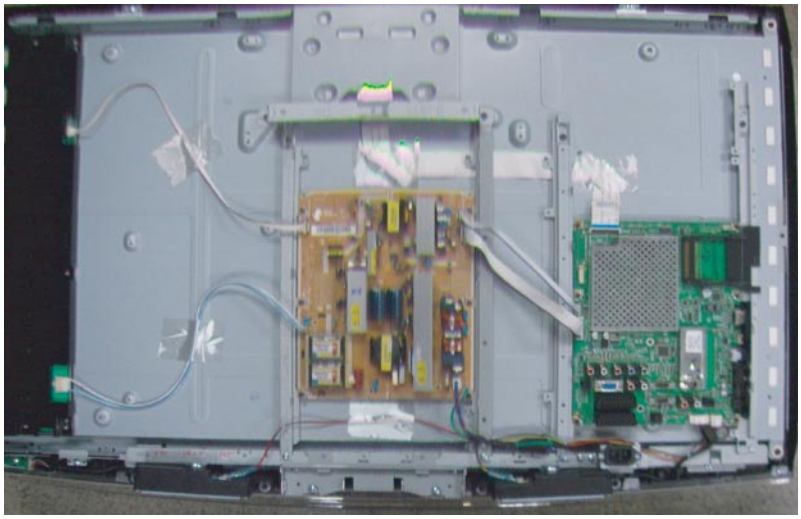

6-3. Connector Functions

Connector	Functions
CN1001 <-> CNM802	Supply main power from SMPS to Main Board. * defective symptom : No Power
CN6003_LCD <-> CNM801	Supply dimming power from SMPS to Main Board. * defective symptom : No picture
CN2101 <-> SPEAKER	Connection Main Board and Speaker. * defective symptom : No sound but normal picture
CN3002 <-> Function & IR	Connection Main Board and Function & IR Assy. * defective symptom : Control panel & remocon doesn't work
CN6001_FFC <-> T-CON	The LVDS signal transferred from Main Board to Panel. * defective symptom : No picture but panel on
CNM803 <-> CN1	Supply power and signal from SMPS to Inverter. * defective symptom : No picture but normal sound
CN801S,GT801 <-> Inlet Socket	Supply power from Inlet Socket to SMPS. * defective symptom : No Power


6-4. Cables

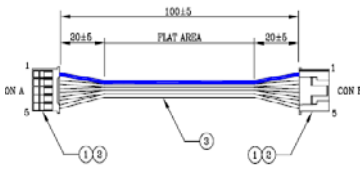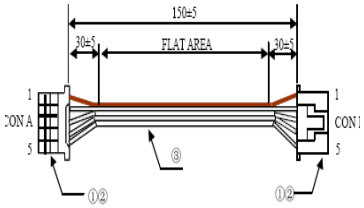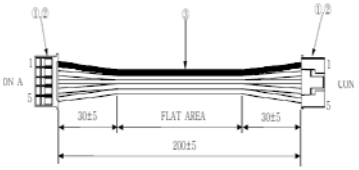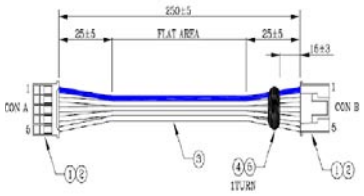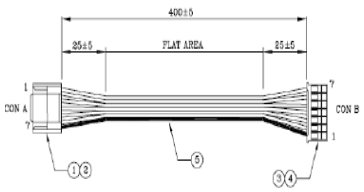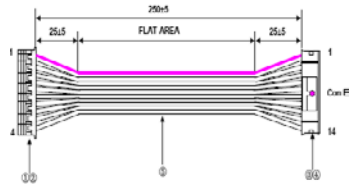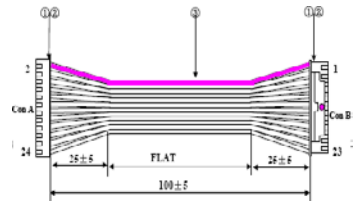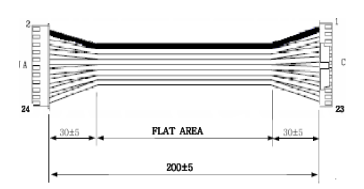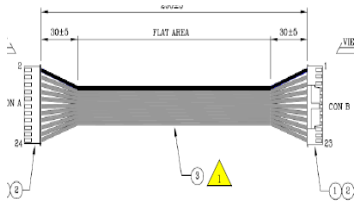Code	BH39-00362G (5P,100mm)	BH39-00362B (5P,150mm)	BN39-00674A (5P,200mm)
Photo			
Code	BN39-00789A (5PIN,250mm)	BN39-00830C(7P,400mm)	BN39-00849G (14P,250MM)
Photo			
Code	BN39-00802A (24P,100mm)	BN39-00802F (24P,200mm)	BN39-00802G (24P,250mm)
Photo			
Code	BN96-07158D (30P,196mm)	BN96-07158A (30P, 225mm)	BN96-07158C (30P, 331mm)
Photo			
Code	BN96-07158B (30P, 475mm)	BN96-07158N (30P, 240mm)	
Photo			

Memo


7. Schematic Diagram

7-1. Block Diagram

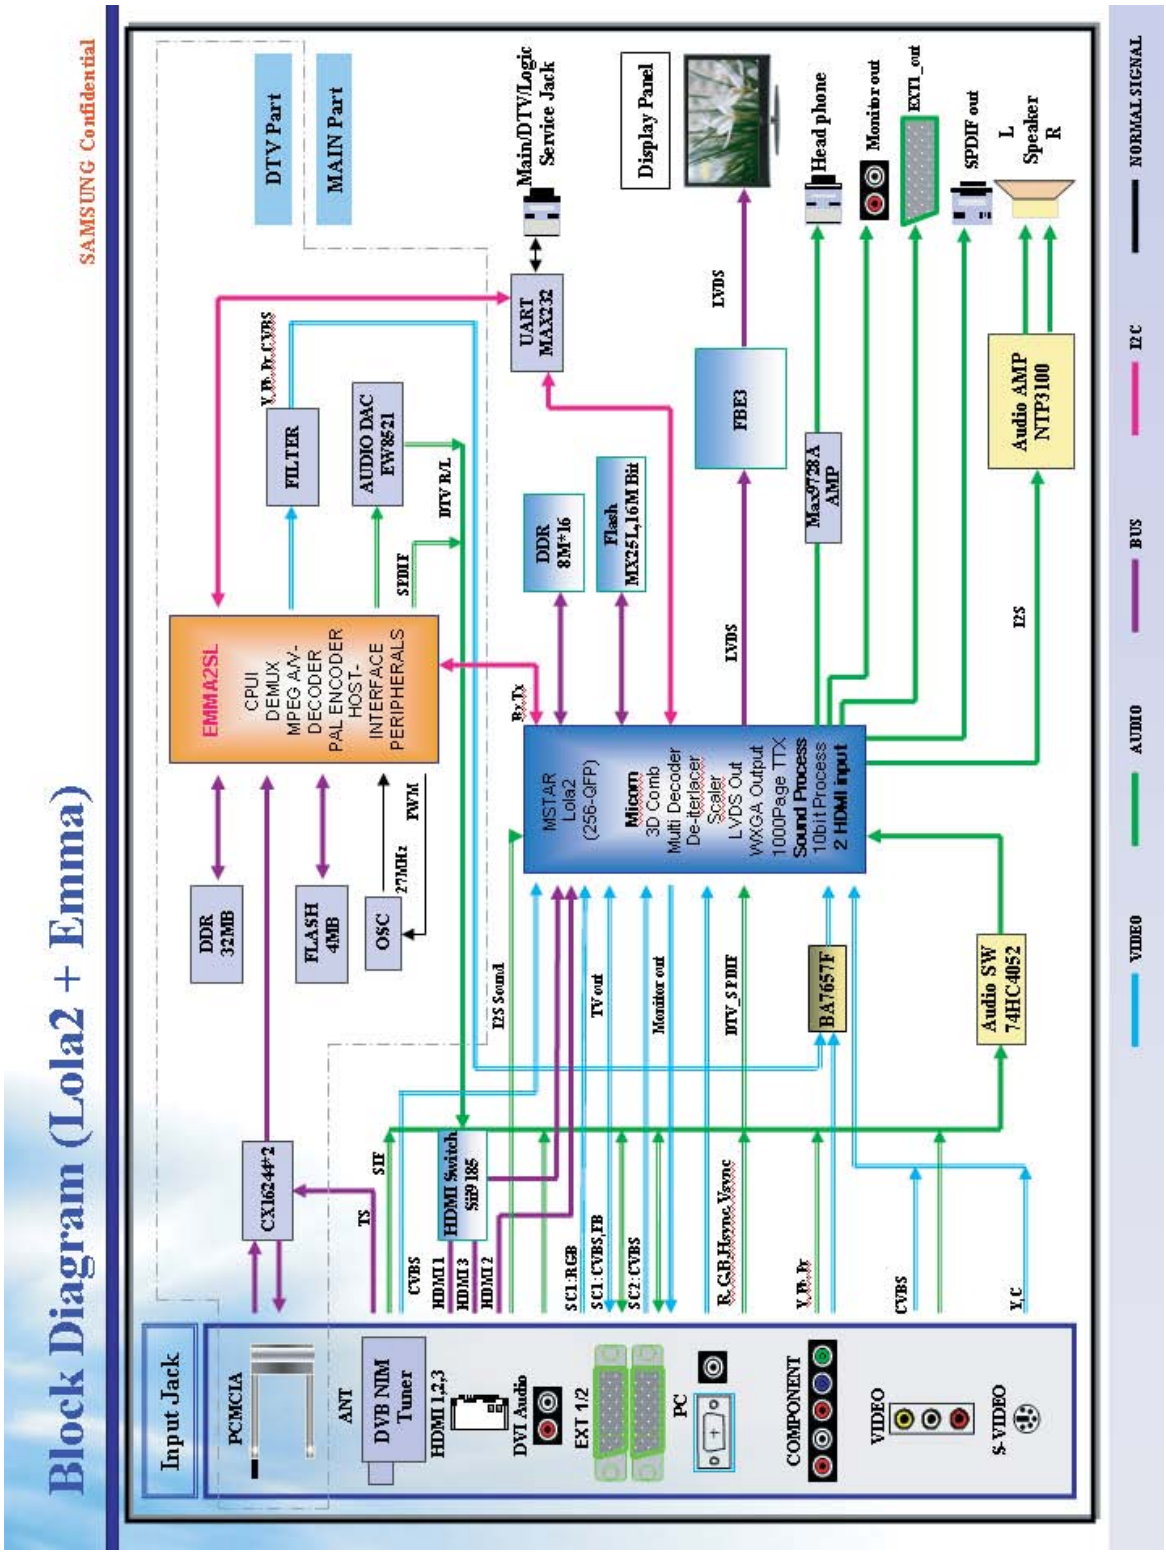


7-3. Schematic Diagrams for iDTV


7-3-1. MAIN POWER BLOCK

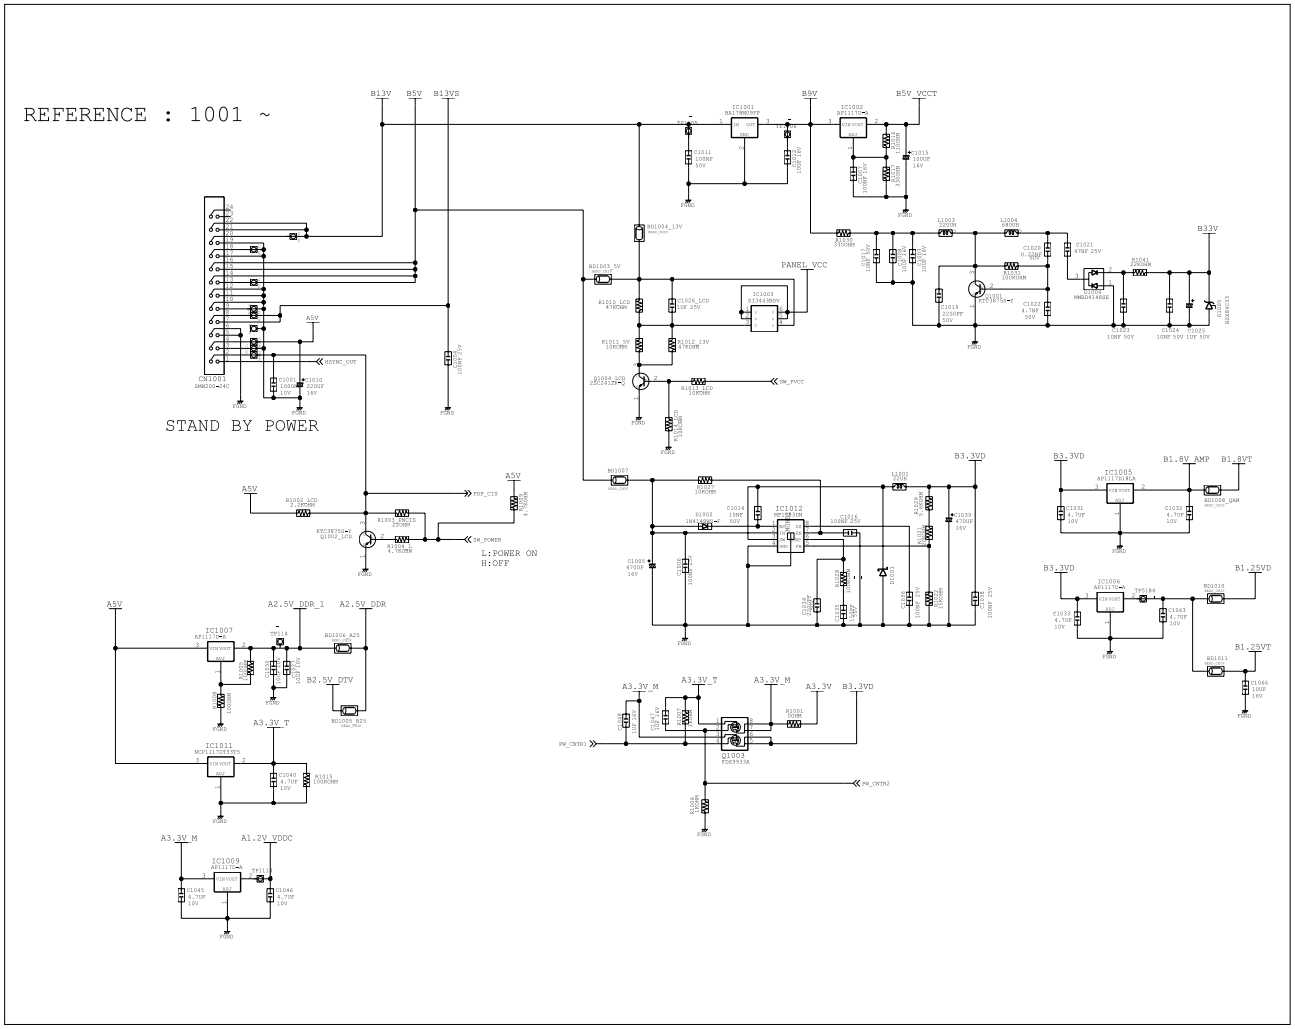


7-3-2. SOUND

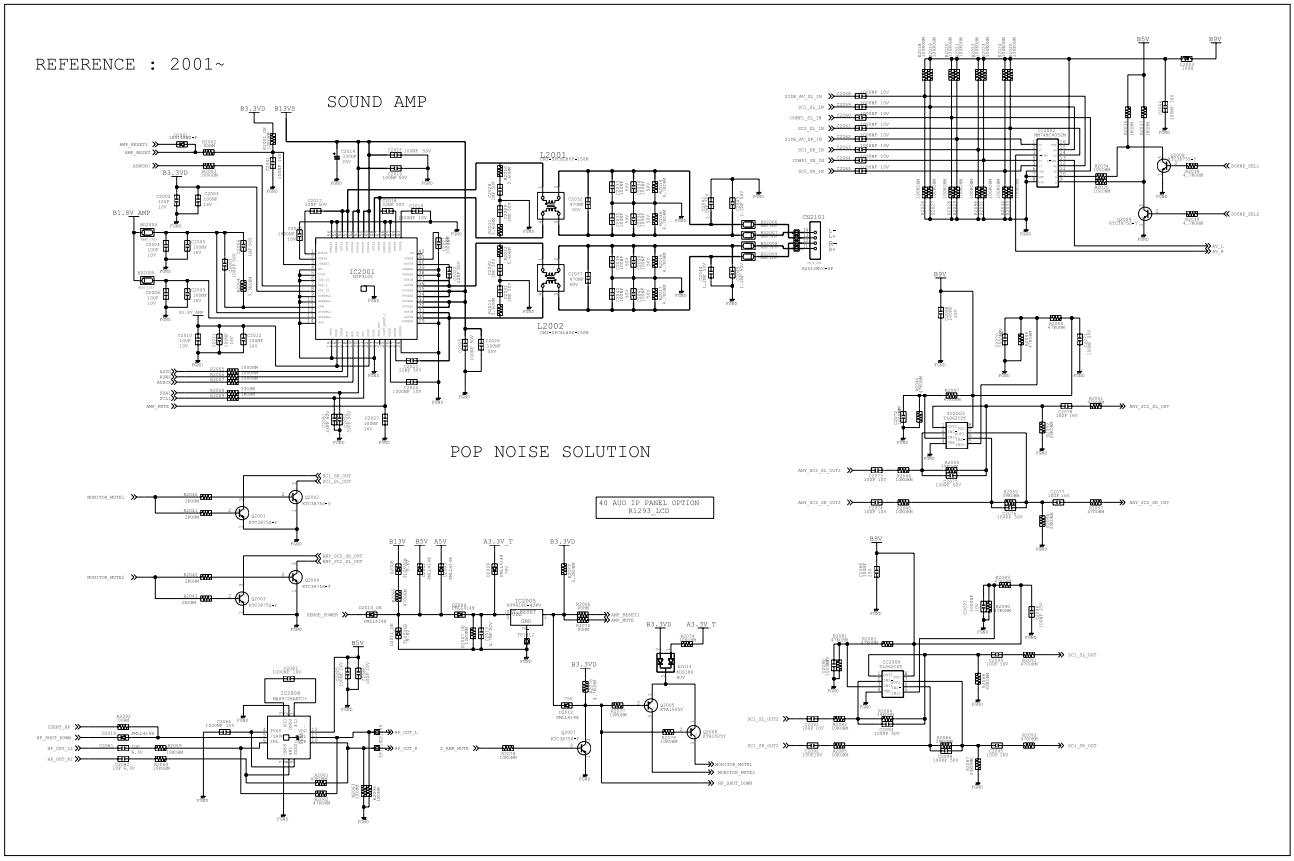


7-3-3. HDMI

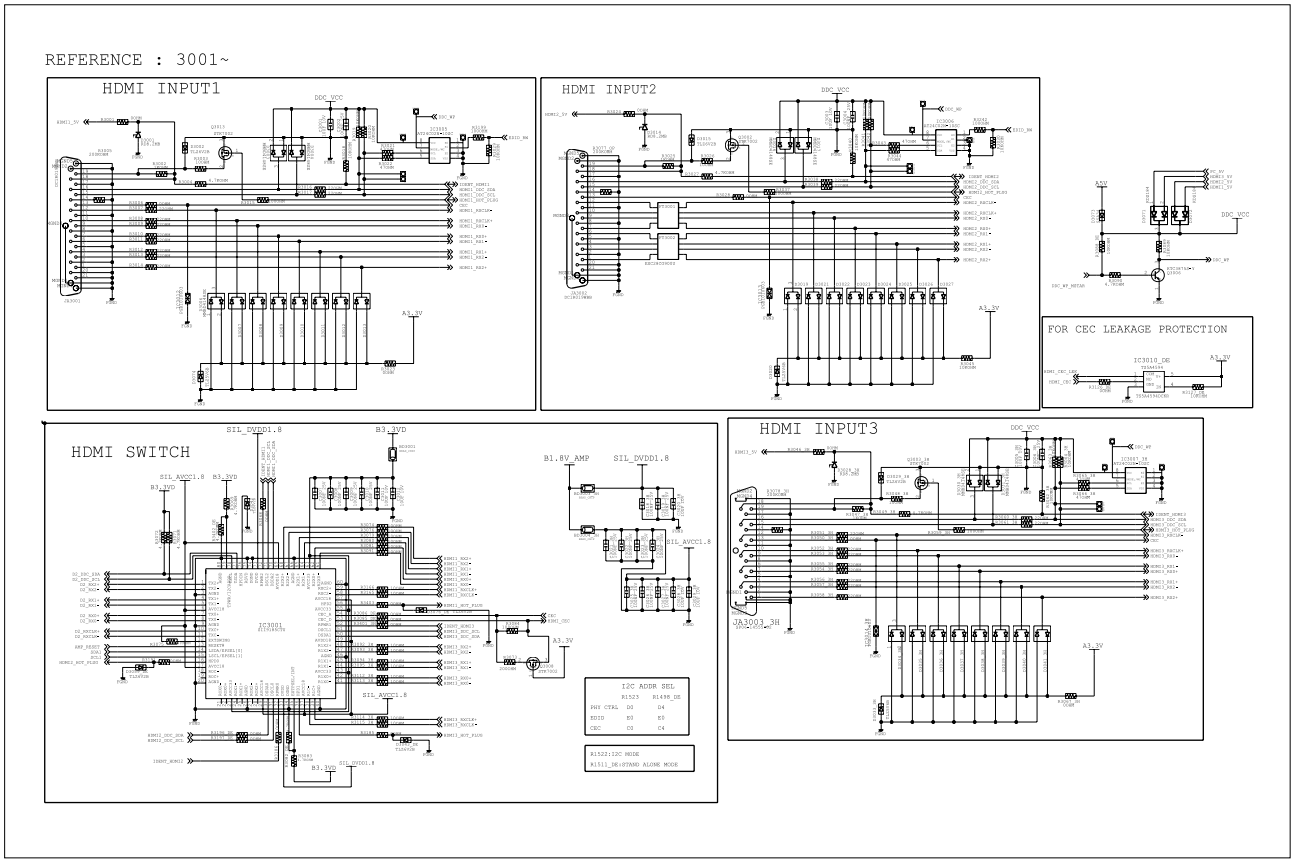


7-3-4. JACK INPUT & TUNER

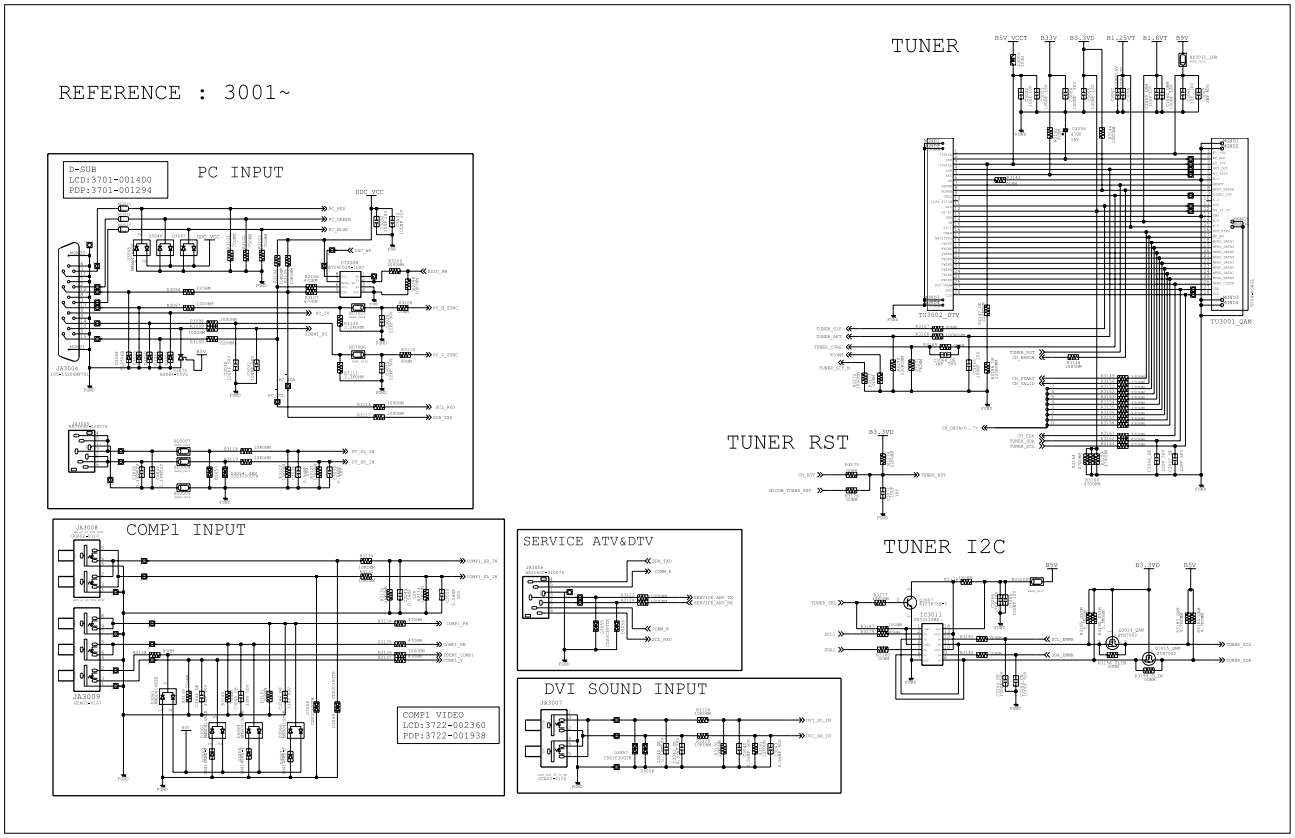


7-3-5. JACK_IN/OUT 2

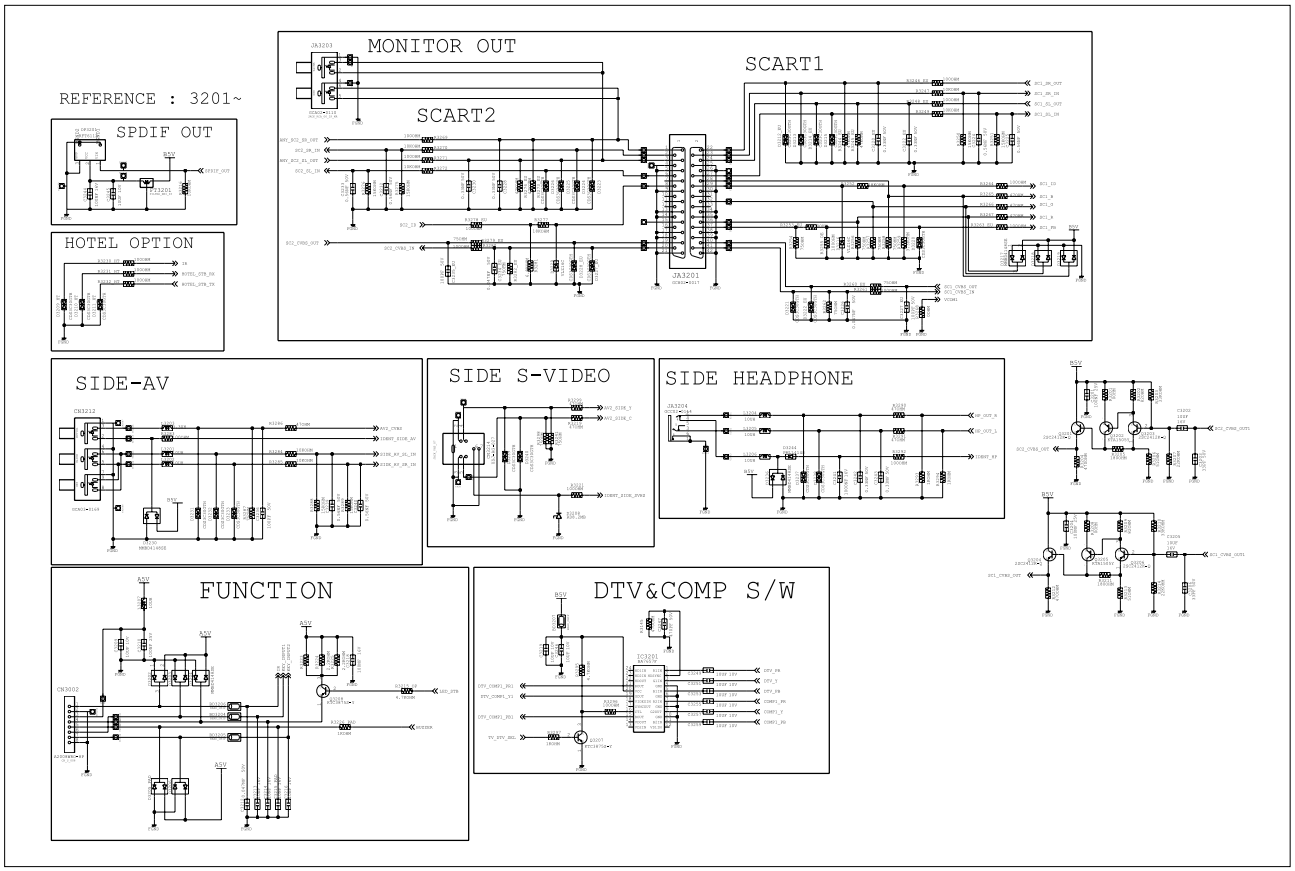


7-3-6. SCALER

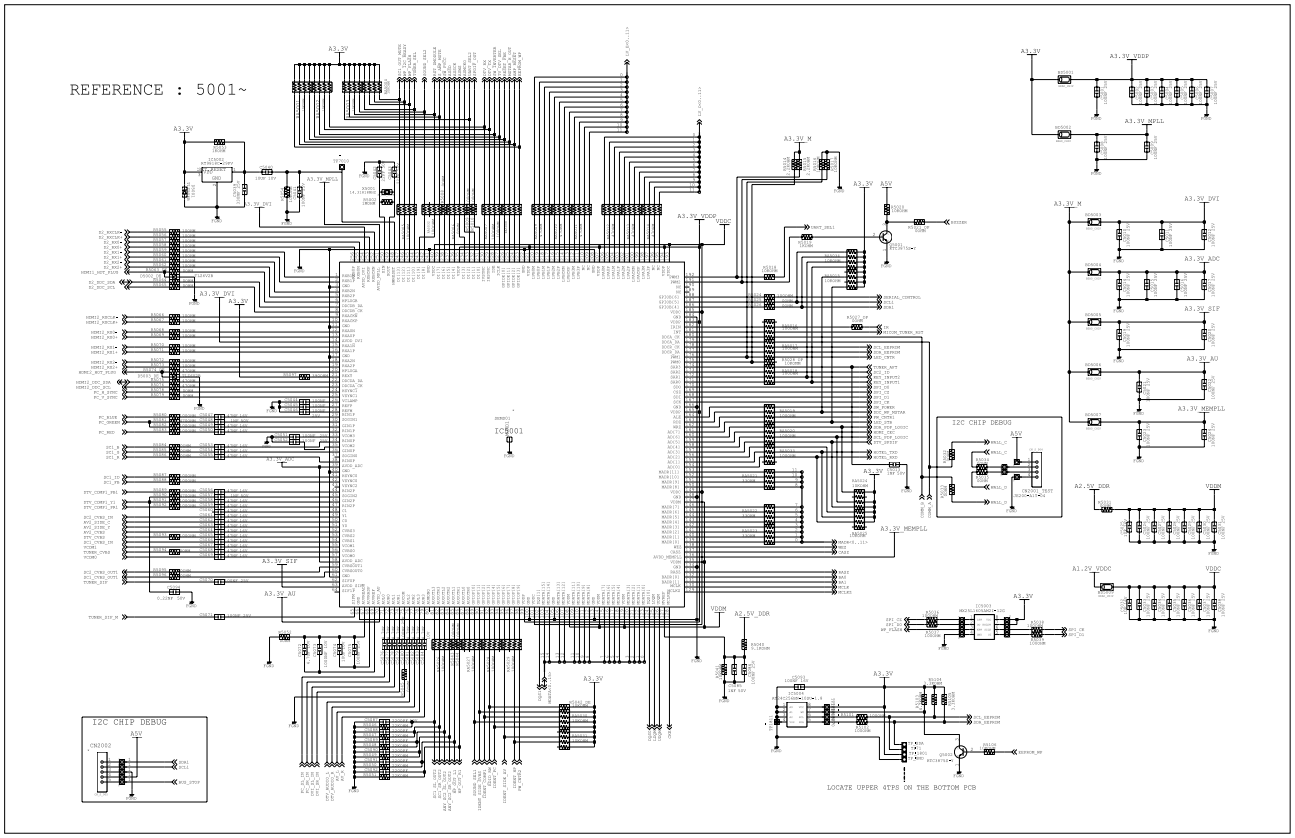


7-3-7. DDR & SERVICE

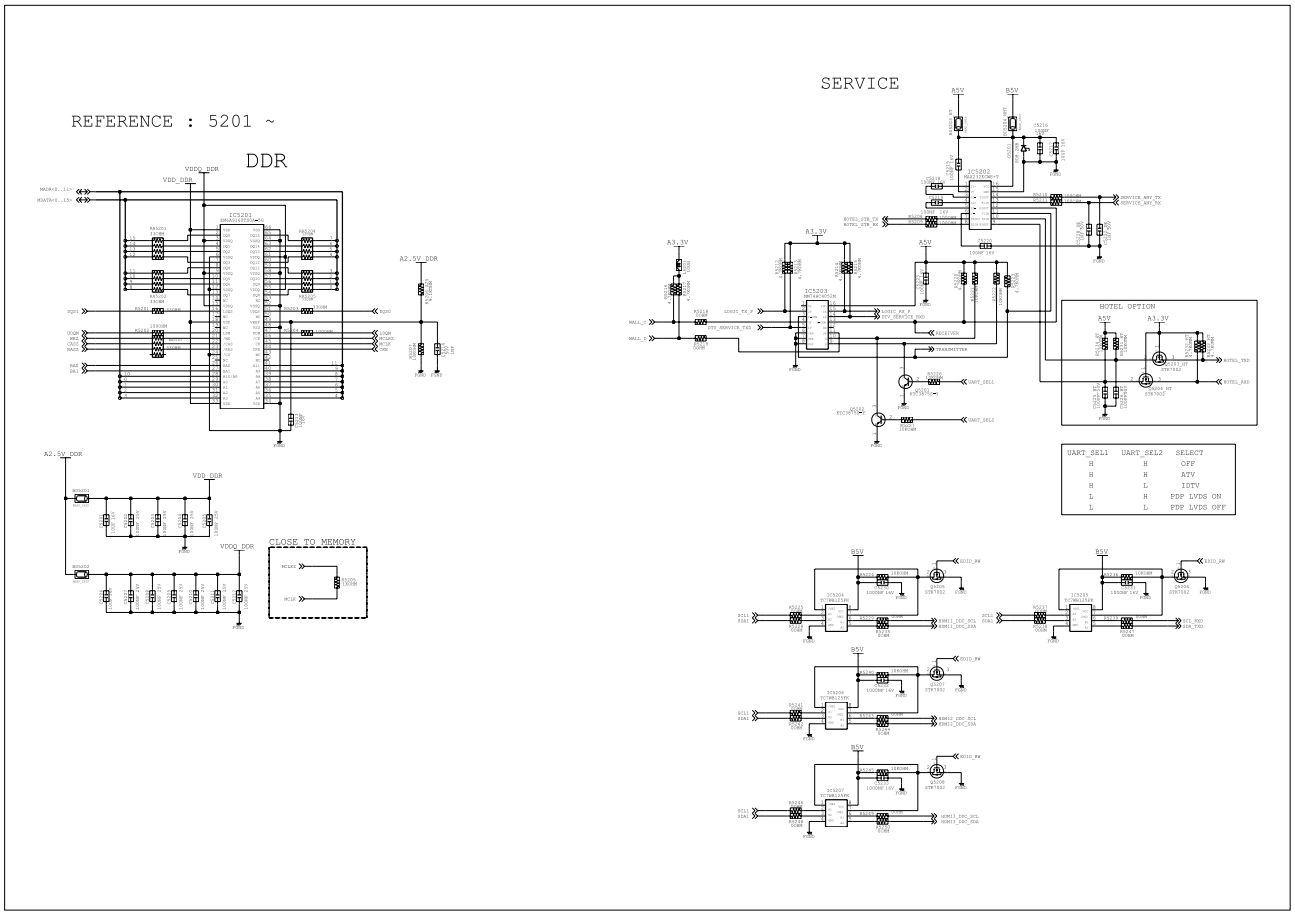


7-3-8. FBE & LVDS

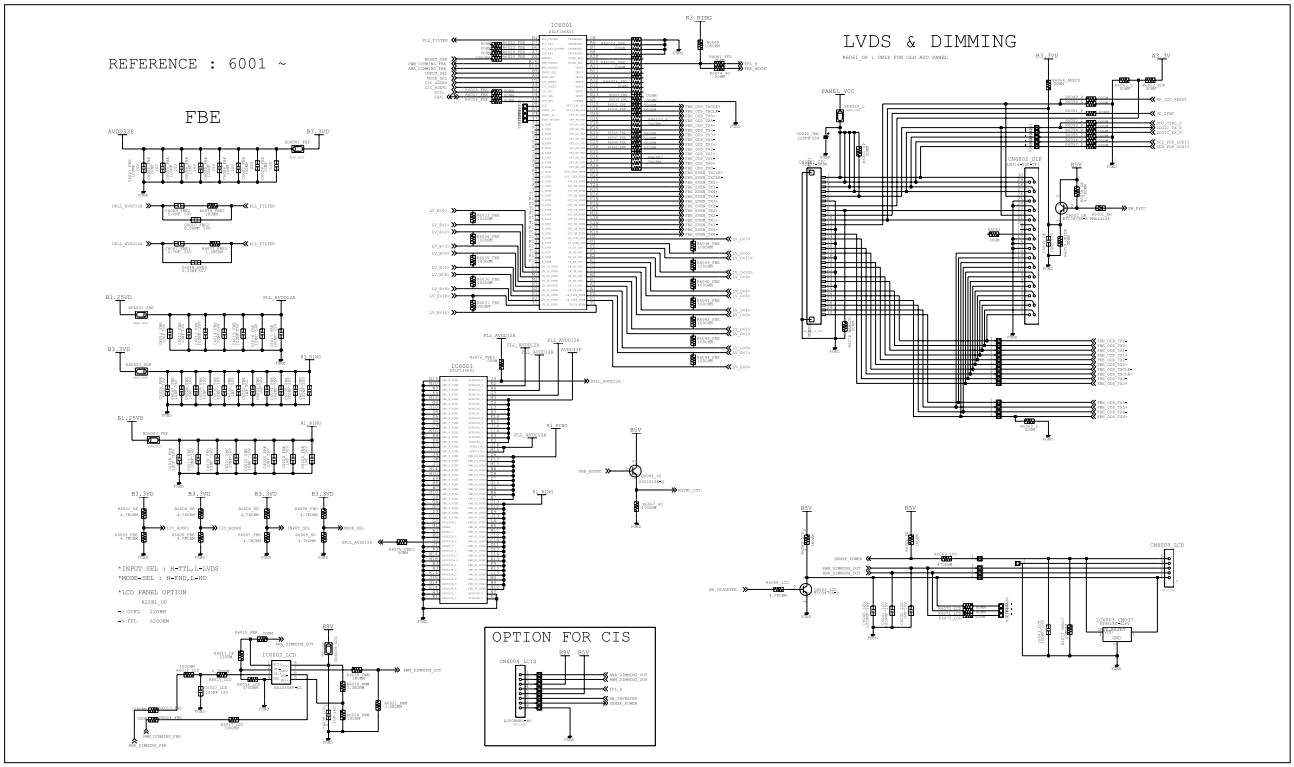

7-3-9. EMMA

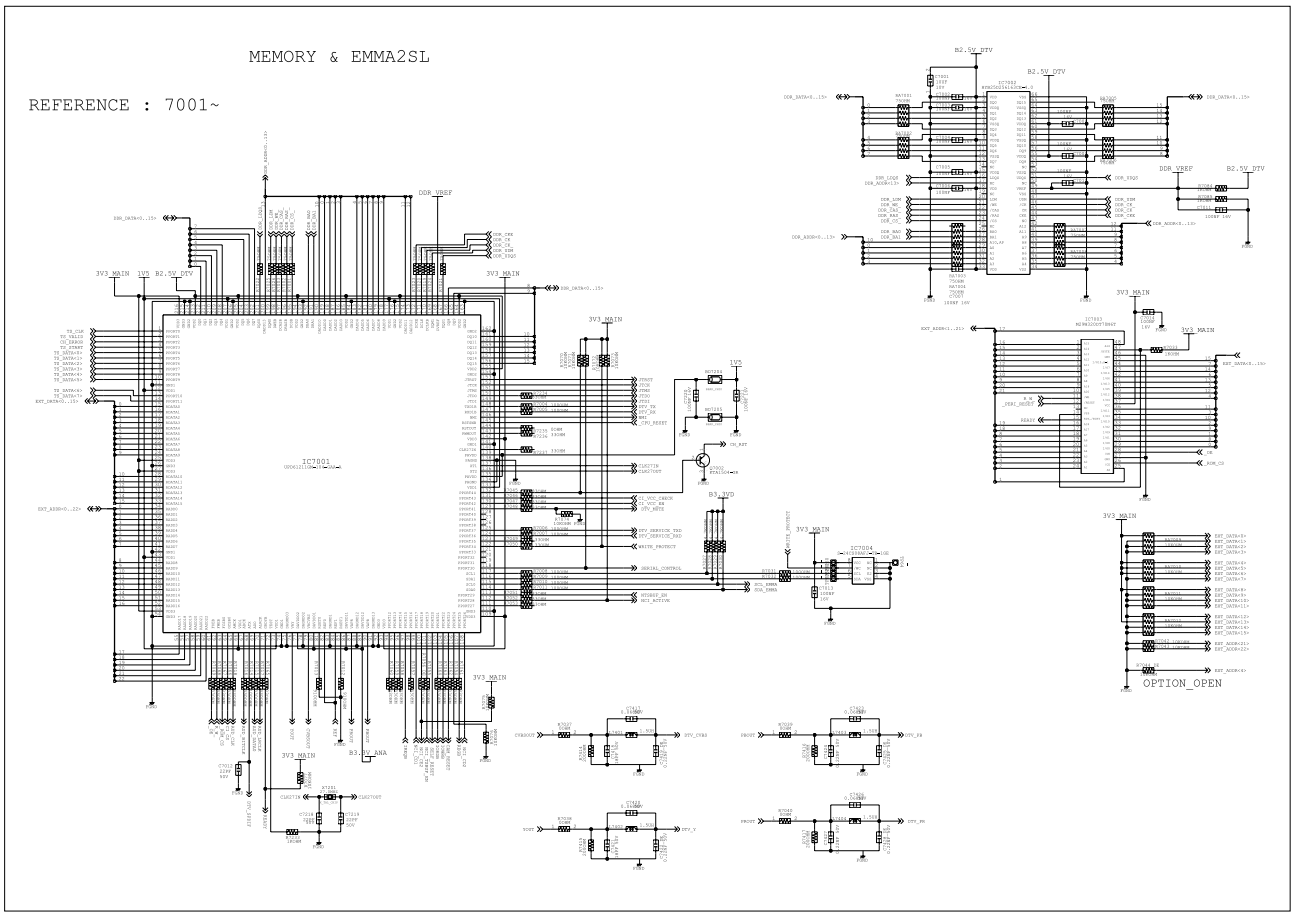


7-3-10. PCMCIA

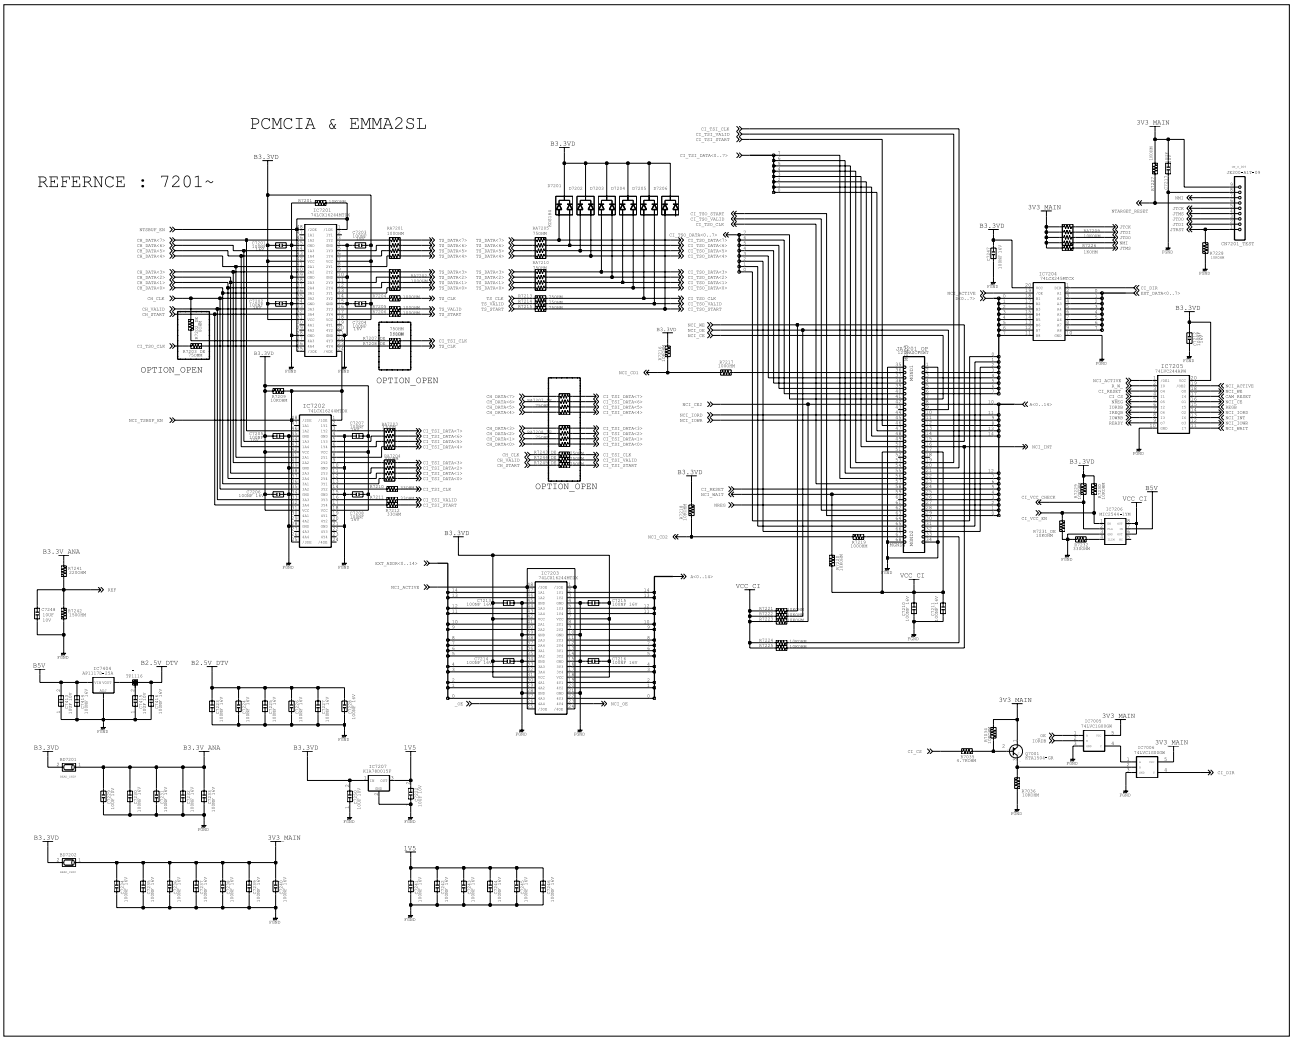
PCMCIA & EMMA2SL
REFERNCE : 7201~
OPTION_OPEN
OPTION_OPEN
OPTION_OPEN
B3_3VD
3V3_MAIN
B3.3V_ANA
B2.5V_DTV
1V5
VCC_CI


7-3-11. DTV AUDIO

REFERENCE : 7401~

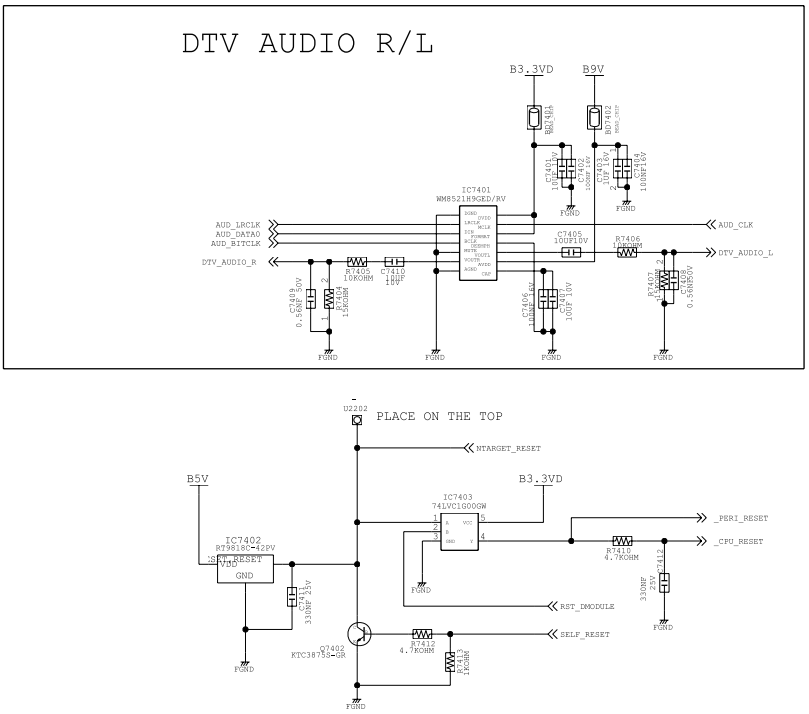


7-4. Schematic Diagrams for Ready


7-4-1. MAIN POWER BLOCK

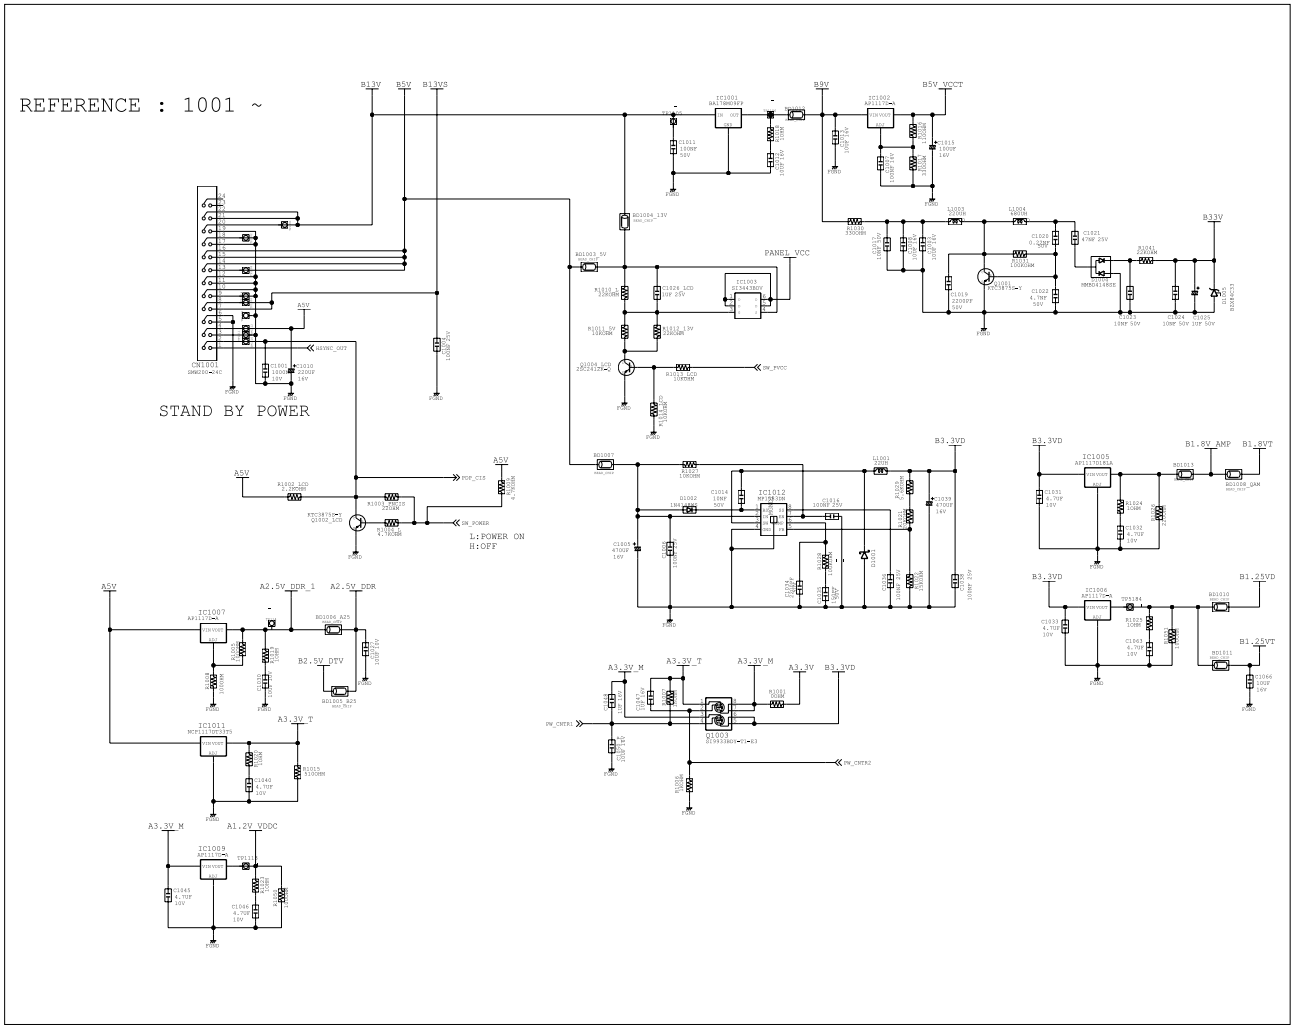


7-4-2. SOUND

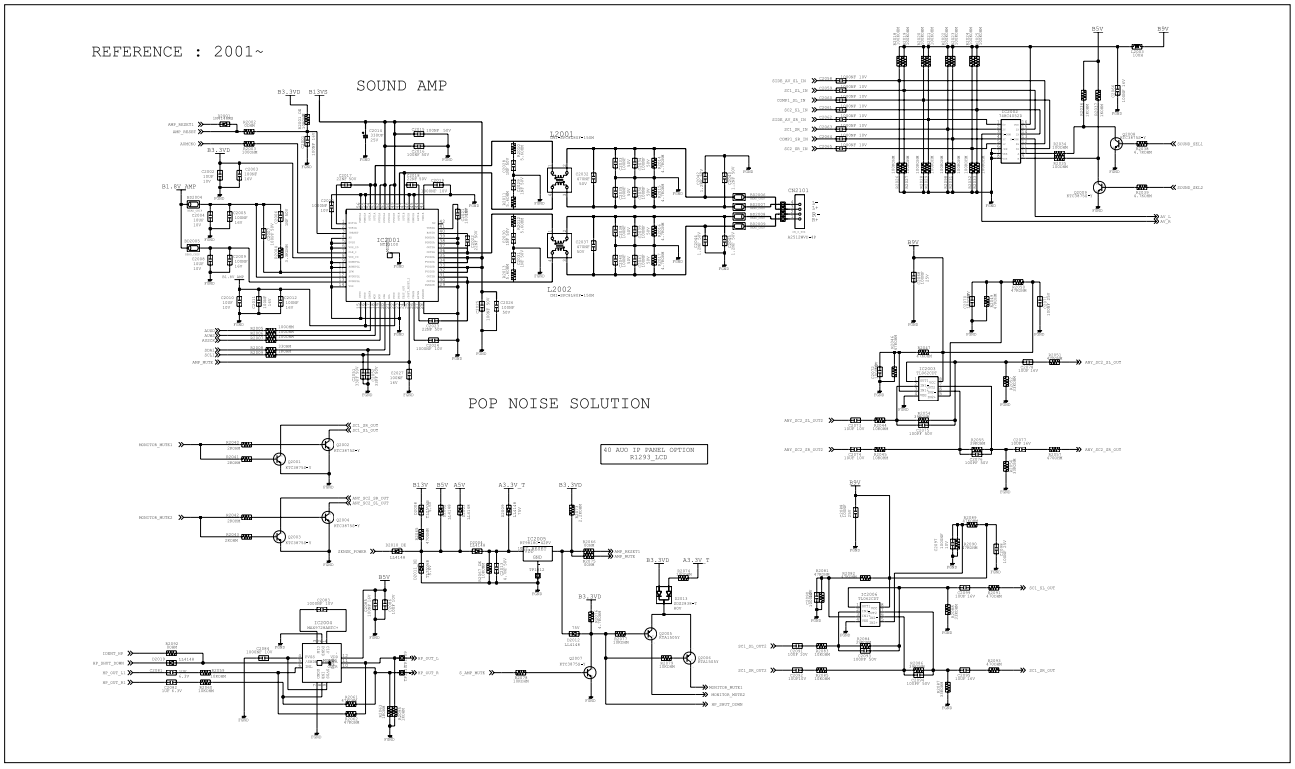


7-4-3. HDMI

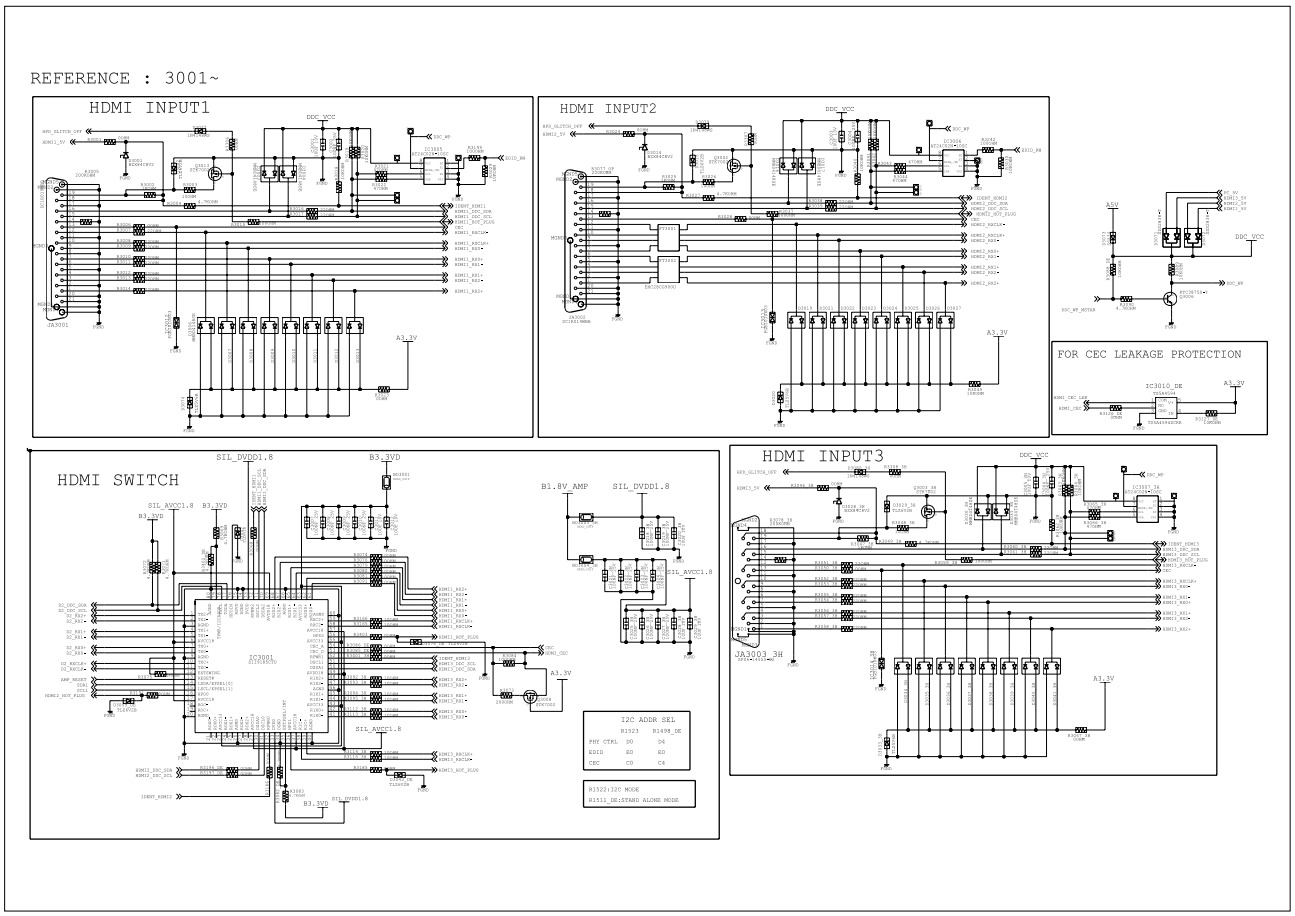


7-4-4. JACK INPUT & TUNER

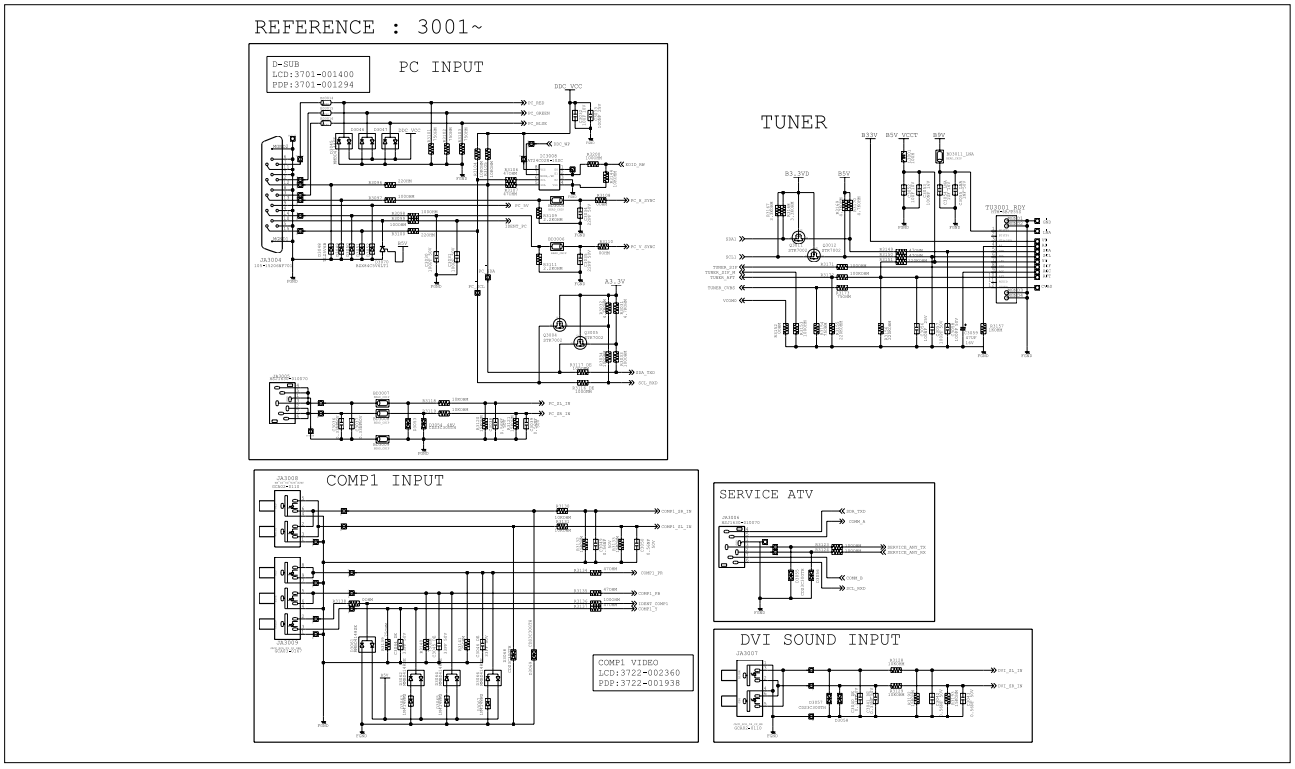


7-4-5. JACK_IN/OUT 2

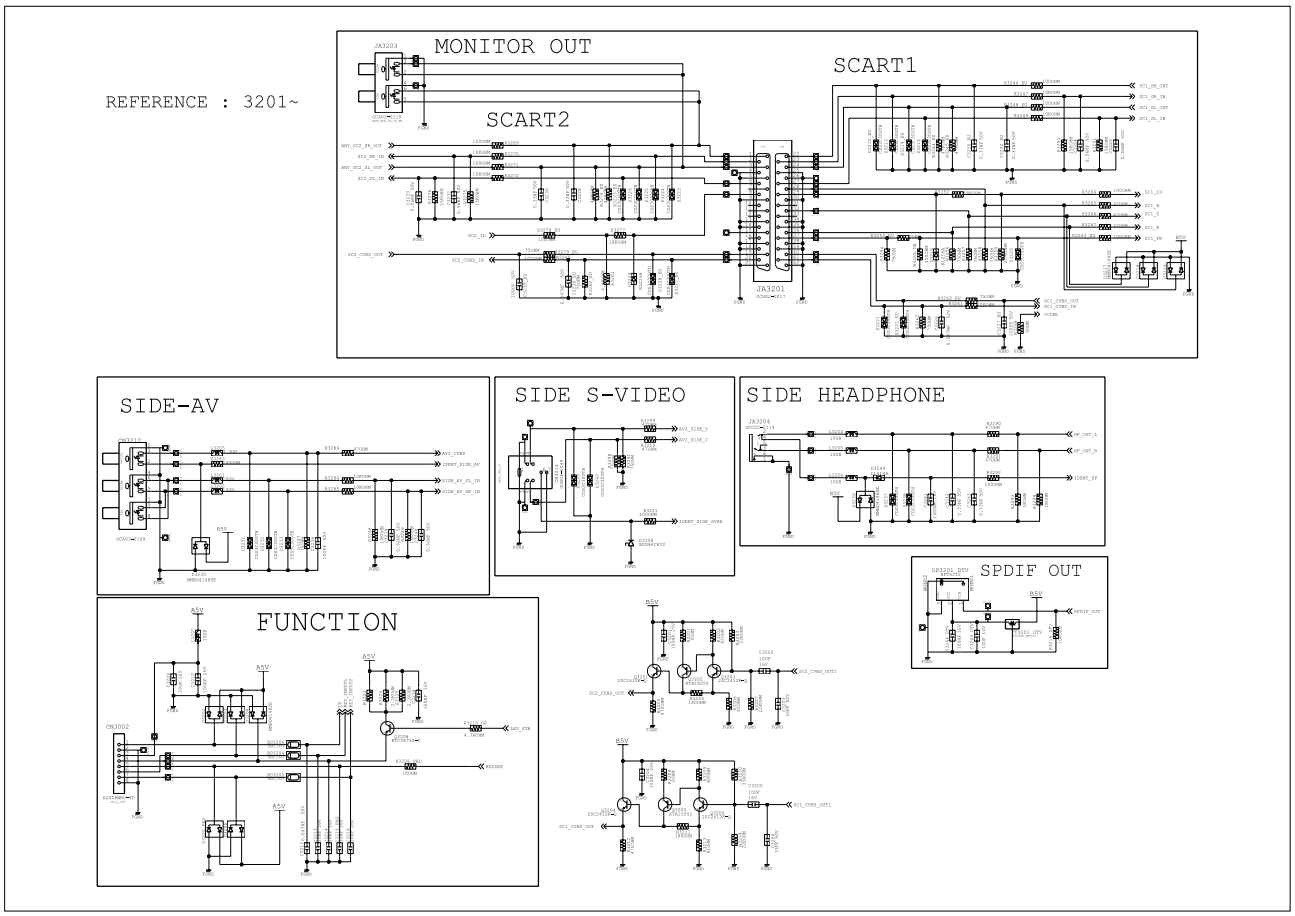


7-4-6. SCALER

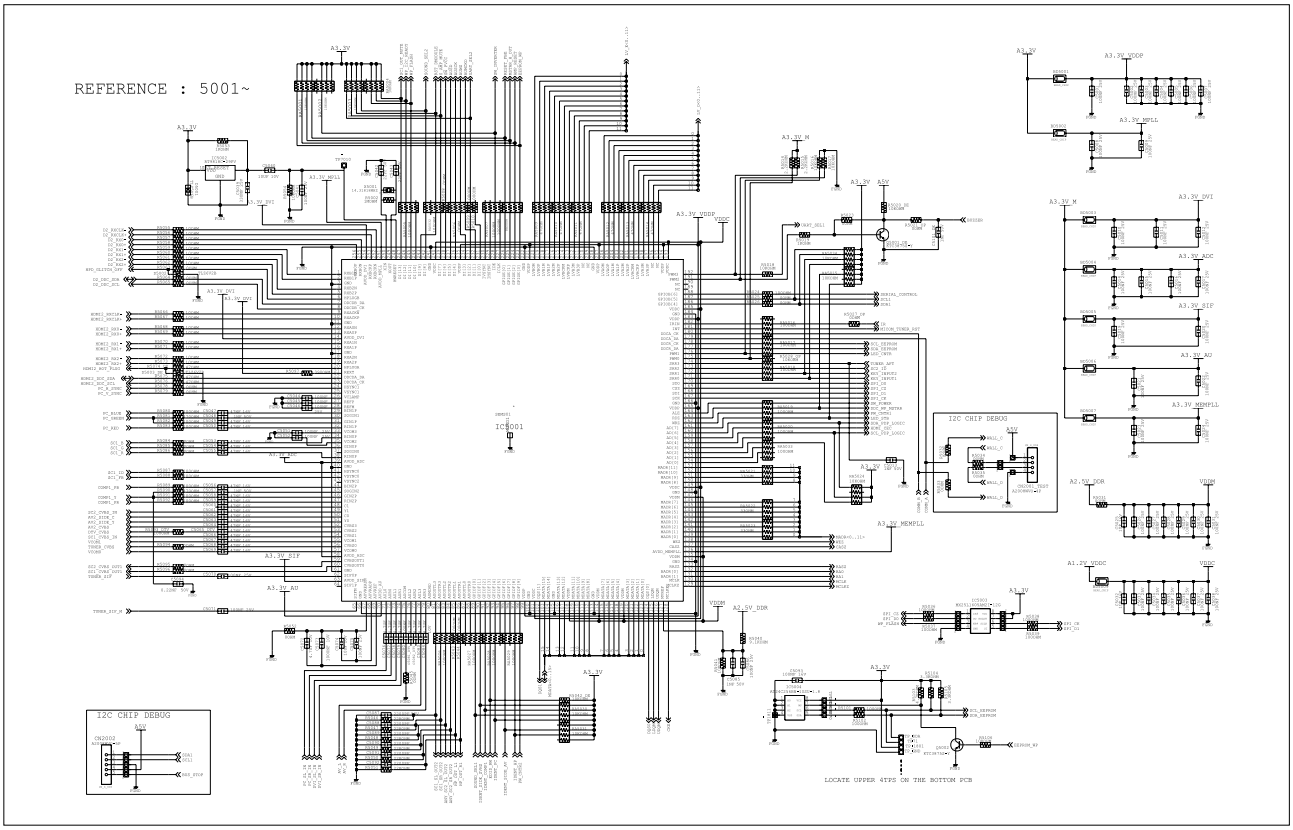

7-4-7. DDR & SERVICE

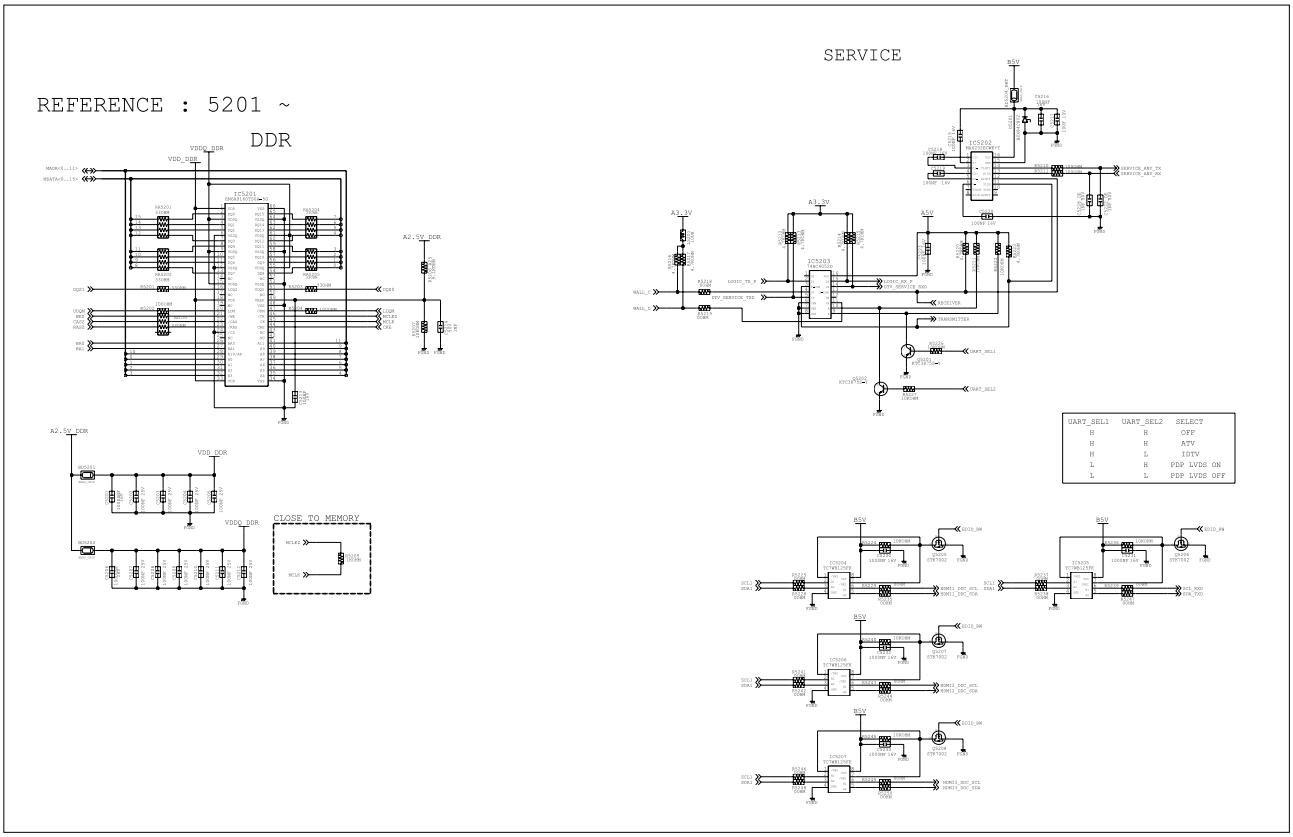

7-4-8. FBE & LVDS

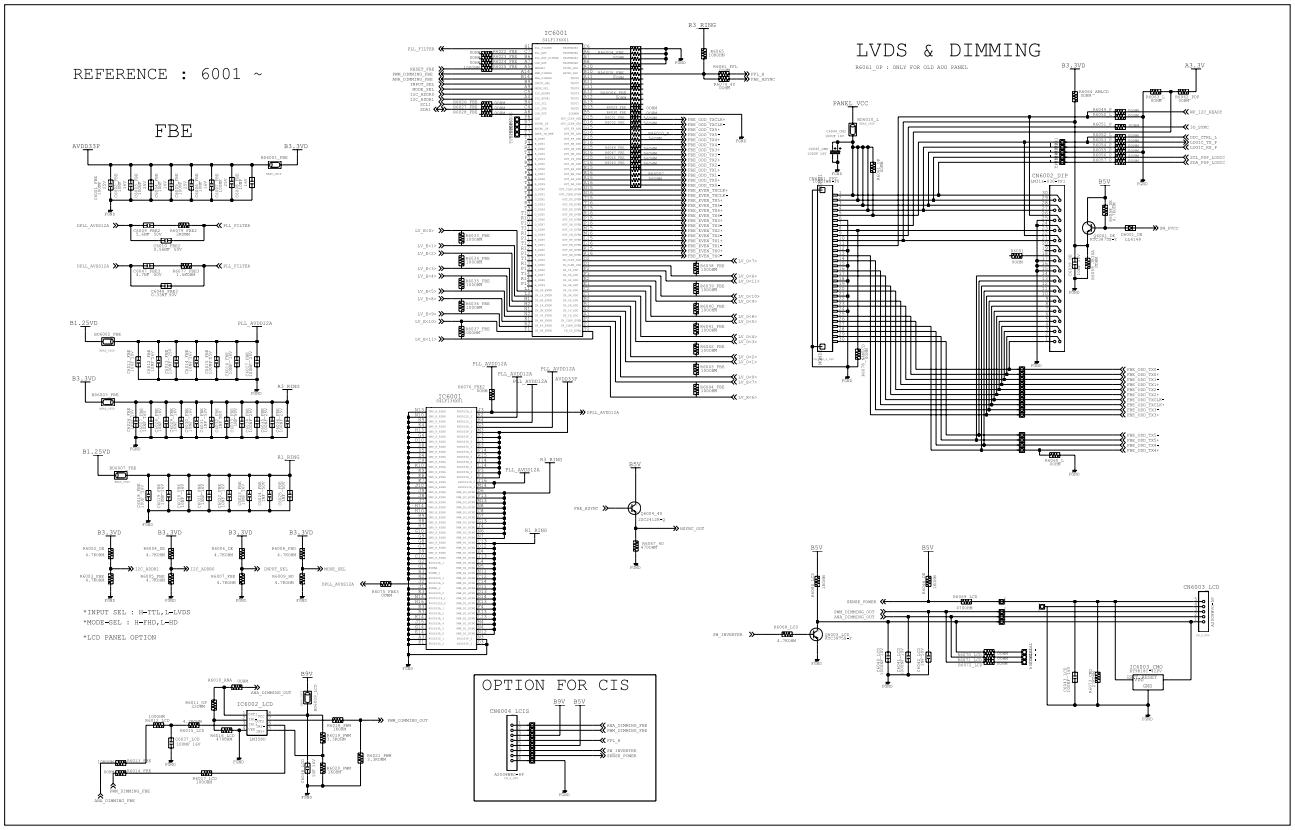
REFERENCE : 6001 ~
FBE
LVDS & DIMMING
OPTION FOR CIS
*INPUT SEL : H-TTL,L-LVDS
*MODE SEL : H-FHD,L-HD
*LCD PANEL OPTION

Memo